

HSF RoHS FILE NO :E362810

SPECIFICATIONS
Rated Current: 3.0AMP
Contact Resistance: 20mΩ Max
Withstand Voltage: 1000V AC/DC
Insulation Resistance: 1000MΩ Min
Operation Temperature: −40°c to +105°c

Contact Material: Brass
Contact Plating: Au Over Ni
Insulator Material: Polyester(UL94V−0)
Resistance To Soldering Heat:
260°C±5°C 10s(PA6T&PA9T&LCP insulator)




Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE± 0.05)




Ordering Information

1225 1 1 02 X N XX U XXX X XX

- Insulator Material Option: C=BK−PA6T; E=BK−PA9T; F=BK−LCP
- Contact Plating: G0:Gold Flash; G1:1u" Gold; G2:1.5u" Gold; G3:2u" Gold; G4:3u" Gold; G5:5u" Gold; G6:10u" Gold; G7:15u" Gold; G8:30u" Gold; S0:Gold Flash/Tin; SN:Tin
- Pin Length
- Packing: 0=PE Bag; A=Tray
- Series No.: 01~99

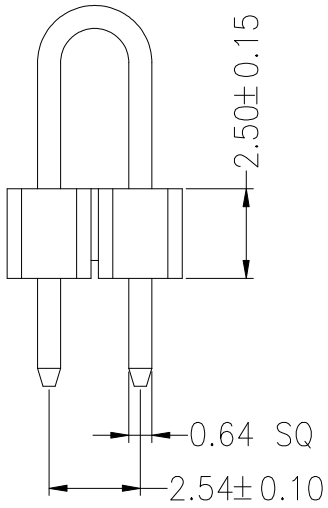

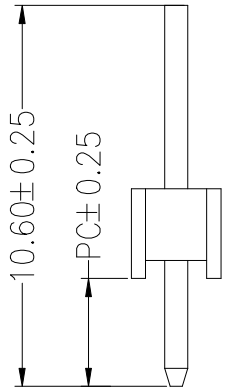

Dimension antitheses list	
ITEM	PC
Standard	3.00

REV	DATE	MODIFICATION DESCRIPTION	CHANGE
A0	2012.04.18	NEW DRAWING	

OPERATION	
X.X	±0.30
X.XX	±0.20
X.XXX	±0.10
Angle	±3°
DIM	TOL

DRAW	YiYuSheng	12.04.18
CHECK		
APPROVE		

SCALE	FIT
UNIT	mm
SIZE	A4
SHEET	1/1
PROJ.	

JILN® 深圳锦凌电子股份有限公司
SHENZHEN JINLING ELECTRONICS CO.,LTD
Tel：86-755-27483253 Fax：86-755-2997-5588

PART NO.	12251102XNXXUXXXXXX
TITLE:	2.54PH H2.5mm 1x2pin U型针