

HSF RoHS FILE NO :E362810

SPECIFICATIONS
Rated Current:3.0AMP
Contact Resistance:20mΩ Max
Withstand Voltage:1000V AC
Insulation Resistance:1000MΩ Min
Operation Temperature:−40°c to +105°c

Contact Material:Brass
Contact Plating:Au or Sn Over Ni
Insulator Material:Polyester(UL94V−0)
Resistance To Soldering Heat:
260° C±5° C, 10s(PA6T&PA9T&LCP insulator)

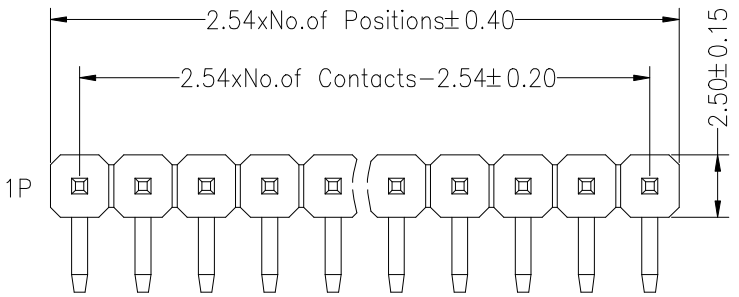


Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

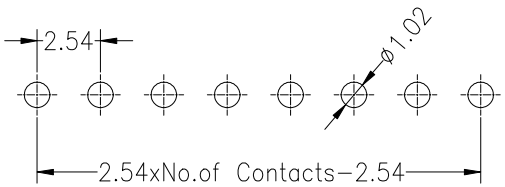


Ordering Information

1225 21 XX X N XX R XXX X XX

No.of Pins Per Row	Insulator Material Option	Contact Plating	Pin Length	Packing	code stream
02−40	C=BK−PA6T E=BK−PA9T F=BK−LCP	G0:Gold Flash G1:1u" Gold G2:1.5u" Gold G3:2u" Gold G4:3u" Gold G5:5u" Gold G6:10u" Gold G7:15u" Gold G8:30u" Gold S0:Gold Flash/Tin SN:Tin		0=PE Bag A=Tray T=Tube	01~99

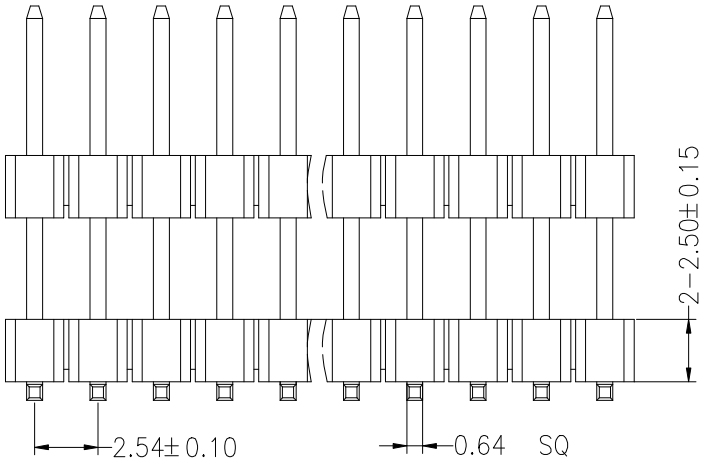

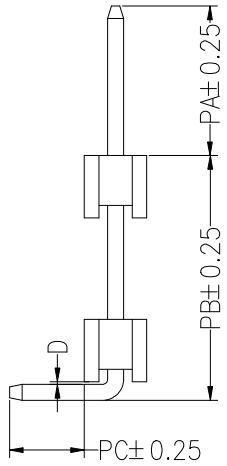

Dimension antitheses list				
ITEM	PA	PB	D	PC
Standard	XXX	XXX	XXX	XXX

REV	DATE	MODIFICATION DESCRIPTION	CHANGE
A0	2012.04.18	NEW DRAWING	

OPERATION		DRAW	YiYuSheng	12.04.18
X.X	±0.30			
X.XX	±0.20	CHECK		
X.XXX	±0.10			
Angle	±3°	APPROVE		
DIM	TOL			

SCALE	FIT
UNIT	mm
SIZE	A4
SHEET	1/1
PROJ.	

JILN® 深圳锦凌电子股份有限公司
SHENZHEN JINLING ELECTRONICS CO.,LTD
Tel：86-755-27483253 Fax：86-755-2997-5588

PART NO.	122521XXXNXXRXXXXXX
TITLE:	2.54PH 2xH2.5mm 1xNpin 90°