

HSF RoHS FILE NO :E362810

SPECIFICATIONS
Rated Current:2.0AMP
Contact Resistance:20mΩ Max
Withstand Voltage:500V AC
Insulation Resistance:1000MΩ Min
Operation Temperature:−40°c to +105°c

Contact Material:Brass
Contact Plating:Au or Sn Over Ni
Insulator Material:Polyester(UL94V−0)
Resistance To Soldering Heat:
260° C±5° C, 10s(PA6T&PA9T&LCP insulator)

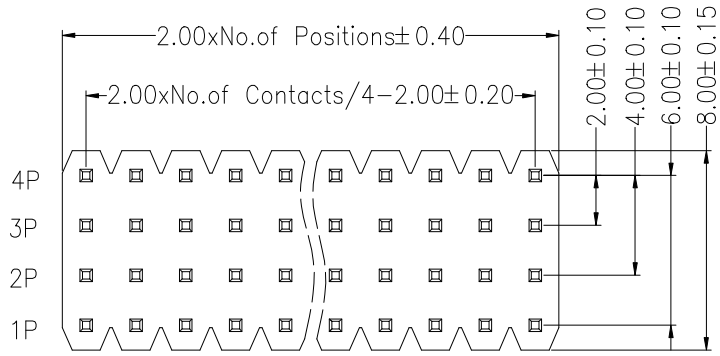



Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

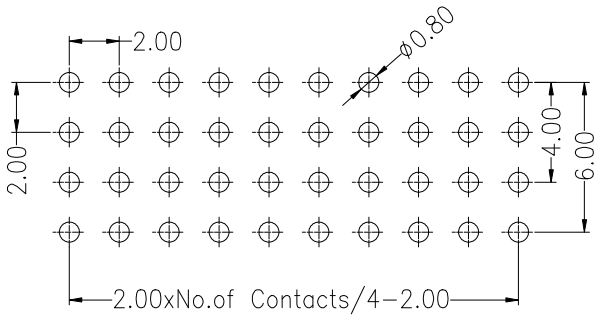



## Ordering Information

1320 14 XX X N XX S XXX X XX

| No.of Pins Per Row | Insulator Material | Contact Plating | Pin Length | Packing | code stream |
|---|---|---|---|---|---|
| 02~40 | Option<br>C=BK−PA6T<br>E=BK−PA9T<br>F=BK−LCP | G0:Gold Flash<br>G1:1u" Gold<br>G2:1.5u" Gold<br>G3:2u" Gold<br>G4:3u" Gold<br>G5:5u" Gold<br>G6:10u" Gold<br>G7:15u" Gold<br>G8:30u" Gold<br>S0:Gold Flash/Tin<br>SN:Tin | | 0=PE Bag<br>A=Tray<br>T=Tube<br>R=ReeL+Cap<br>P=Tube+Cap | 01~99 |

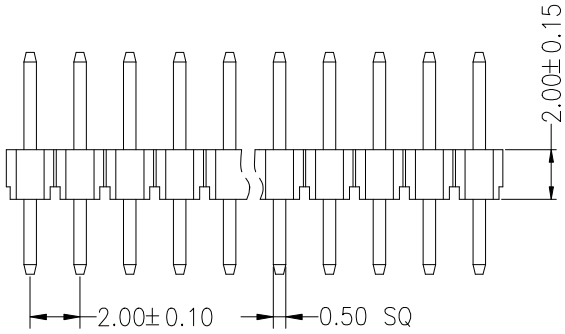

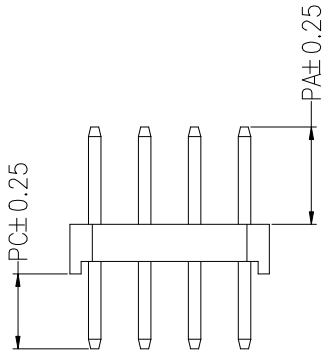
| Dimension antitheses list | | | |
|---|---|---|---|
| ITEM | PA | PC | L |
| Standard | 3.90 | 2.80 | 8.70 |

| REV | DATE | MODIFICATION DESCRIPTION | CHANGE |
|---|---|---|---|
| A0 | 2012.04.18 | NEW DRAWING | |

| OPERATION | | DRAW | YiYuSheng | 12.04.18 |
|---|---|---|---|---|
| X.X | ±0.30 | | | |
| X.XX | ±0.20 | CHECK | | |
| X.XXX | ±0.10 | | | |
| Angle | ±3° | APPROVE | | |
| DIM | TOL | | | |

| SCALE | FIT |
|---|---|
| UNIT | mm |
| SIZE | A4 |
| SHEET | 1/1 |
| PROJ. | |


JILN® 深圳锦凌电子股份有限公司
SHENZHEN JINLING ELECTRONICS CO.,LTD
Tel: 86-755-27483253 Fax: 86-755-2997-5588


| PART NO. | 132014XXXNXXSXXXXXX |
|---|---|
| TITLE: | 2.0PH H2.0mm 4xNpin 180° |