

HSF RoHS

SPECIFICATIONS

PERFORMANCE

Electical Rating:AC/DC 50V 0.5A

Insulation Resistance: 500MΩ

Contact Resistance:50mΩ Max

Withstang Volt:150V AC/minute

Opratng Temperature:-40°Cto+105°C

Material

Contact:Phosphor Bronze Gold-Plated

Insulator Material:Polyester(UL94V-0)

Housing:LCP

Max.Processing Temp:230°C for30-60 seconds
(260°C for 10 seconds)

Ordering Information

3710 F XXX 038 G3 F X 01


No.of
Pins
24P
~140P

Plastics
Height
H=3.8

Contact Plating
G0:Gold Flash
G2:1.5U" Gold
G3:2U" Gold
G4:3U" Gold
G5:30U" Gold
S0:Gold Flash/Tin

Insulator
Material
Option
D=BK-PA46
F=BK-LCP
E=PA9T

Post
A=Tray
T=Tube
R=Tape&Reel
P=Tube+Cap

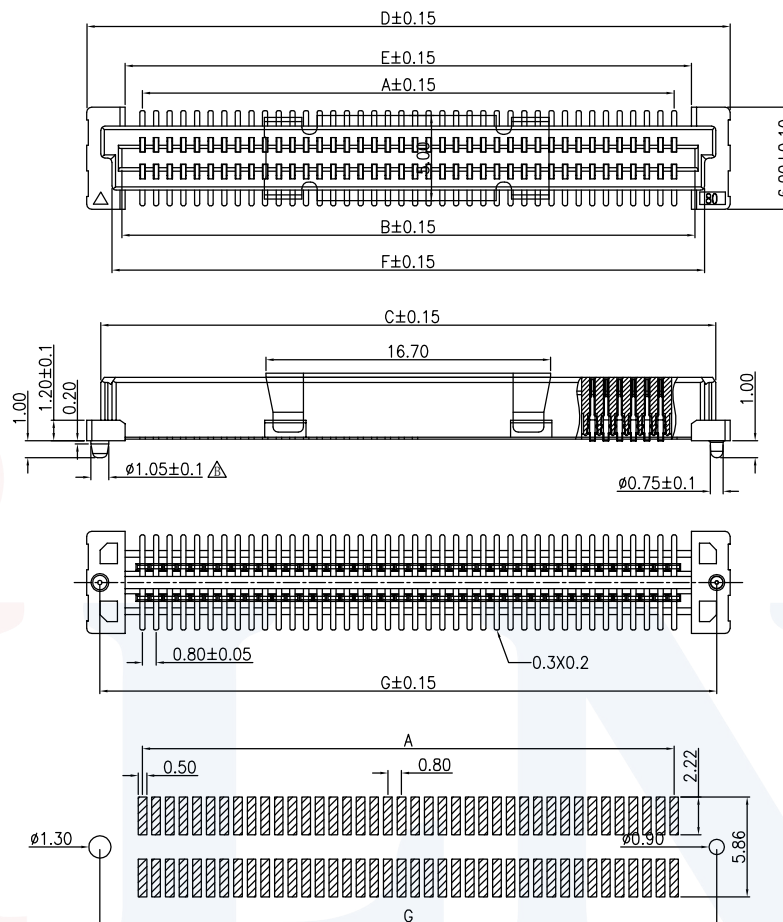

PCB LAYOUT

P数	A	B	C	D	E	F	G
24	8.80	11.24	13.70	15.36	10.84	12.38	13.80
40	15.20	17.64	20.10	21.76	17.24	18.78	20.20
60	23.20	25.64	28.10	29.76	25.24	26.78	28.20
80	31.20	33.64	36.10	37.76	33.24	34.78	36.20
100	39.20	41.64	44.10	45.76	41.24	42.78	44.20
120	47.20	49.64	52.01	53.76	49.24	50.78	52.20
140	55.20	57.64	60.01	61.76	57.24	58.78	60.20

OPERATION

DRAW

Ben

17.06.10

SCALE

FIT

UNIT

mm

SIZE

A4

SHEET

1/1

PROJ.

1/1

JILN 深圳市锦凌电子有限公司
SHENZHEN JINLING ELECTRONIC CO.,LTD
Tel: 86-755-2997-5806/5802 Fax: 86-755-2997-5992

PART NO.

3710FXX038G3FX01

TITLE:

0.8BTB-NPIN H=3.8 Female

X.X ±0.30

X.XX ±0.20

X.XXX ±0.10

Angle ±3°

DIM TOL

CHECK

APPROVE

B 2017.06.10 change post size 1.15 — 1.05

A 2014.03.29 NEW DRAWING

REV DATE MODIFICATION DESCRIPTION CHANGE

1

2

3

4

5

6

7

8

9