

HSF RoHS  

G

NOTES1:

UL Standard

1. Rated voltage/current : 300V / 18A
2. Withstanding voltage : AC1600V/1Min.
3. Torque value : M3 , 0.6/5.3N·m/Lb.in
4. Wire range : 30~12AWG

IEC Standard

1. Pollution degree	2
Overvoltage category	III
Rate impulse voltage(kV)	4KV
Rate voltage(V)	320
Rate current(A)	15A

2. Torque value : M3 , 0.6/5.3N·m/Lb.in
3. Wire range : 0.2~2.5mm²

E

NOTES2:

1. Housing Material(塑件): PA66(A50H1) (UL94 V-0)
2. Contact(端子): (高精度)磷青铜 C5191 1/2H
3. Clamp(方盒): Brass(黄铜), Ni plating(镀镍)
4. Screw (螺丝): Steel, Zinc plating(钢,镀锌)

NOTES3:

1. Dimension shall be interpreted per ASME Y14.5-2009
2. Pitch : 5.08mm, Poles : N=02~24P
3. Stripping length : 7mm
4. Operating temperature: -40°C~+105°C
5. Undimensioned tolerances:






Pitch range in mm		Nominal dimension range in mm		Tolerance	
Over 6	Over 10	Over 30	Over 60	Over 100	Over 150
TO 6	TO 10	TO 30	TO 60	TO 100	TO 150
0.1/10					
≤					
±0.15	±0.20	±0.30	±0.50	±0.70	±1.00
±0.30	±0.50	±0.70	±1.00	±1.30	±2*

6. RoHS Compliance

Ordering Information

JL2EDGKJ- 508 XX B 0 1

Pitch 508=5.08PH No.of pins 2P,3P,4P~24P
 Housing B=Black G=Green U=Blue R=Red W=White Y=Yellow D=Orange E=Grey
 Color 0=Pe bag T=Tube A=Tray
 Packing

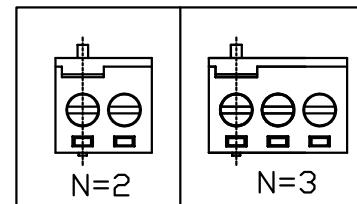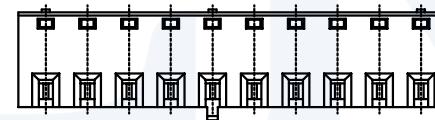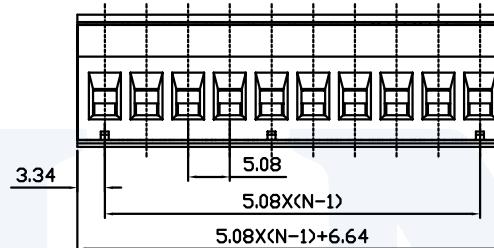

DRAW	SHUANGPING ZHENG	SCALE	FIT
		UNIT mm	
CHECK	LICHAO LIU	SIZE A4	
		SHEET 1/1	
APPROVE	YONGLIANG GAO	PROJ. 	TITLE: JL2EDGKJ-5.08-XXP 插拔式母座/绿色

JILN® 东莞市锦凌电子有限公司
DONGGUAN JINLING ELECTRONIC CO., LTD