

NOTES1:

UL Standard

- 1.Rated voltage/current : 300V / 12A
- 2.Withstanding voltage : AC1600V/1Min.
- 3.Torque value : M3 , 5.32Lb.in
- 4.Wire range : 30~14AWG

IEC Standard

1.

Pollution degree	2	2	3
Overvoltage category	II	III	III
Rate impulse voltage(KV)	4KV	4KV	4KV
Rate voltage(V)	630V	400V	250V
Rate current(A)	10A		
- 2.Torque value : M3 , 0.6N·m
- 3.Wire range : 0.2~1.5mm²

NOTES2:

- 1.Dimension shall be interpreted per ASME Y14.5-2009
- 2.Pitch : 5.08mm, Poles : N=06~72P
- 3.Stripping length : 6~7mm
- 4.Operating temperature: -40°C~+105°C
- 5.Undimensioned tolerances:

Pitch range in mm			Nominal dimension range in mm								
TO 6	Over 6 TO 10	Over 10 TO 24	TO 30	Over 30 TO 60	Over 60 TO 100	Over 100 TO 150	Over 150	0.1/10			
±0.15	±0.20	±0.30	±0.30	±0.50	±0.70	±1.00	±1.30	±2°			

6.RoHS Compliance

Ordering Information




JL127A3- 500 XX G 0 1

Pitch
500=5.0PH


No.of pins
3x2P~3x24P

Housing
B=Black
G=Green
U=Blue
R=Red
W=White
Y=Yellow
O=Orange
E=Grey

Packing
O=Pe bag
T=Tube
A=Tray

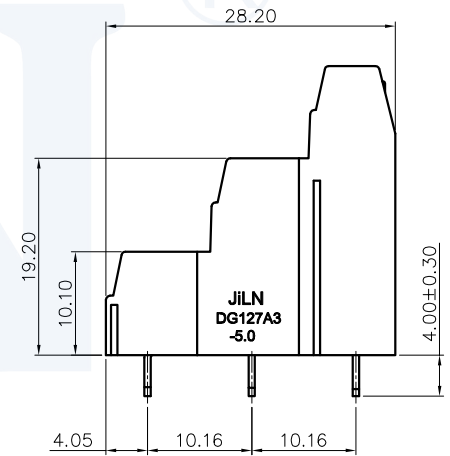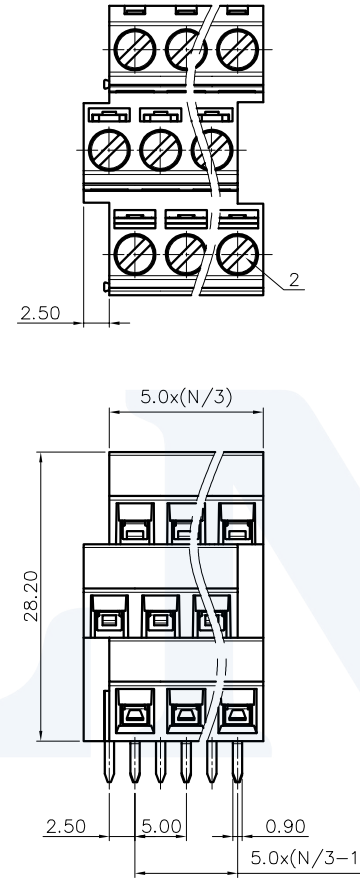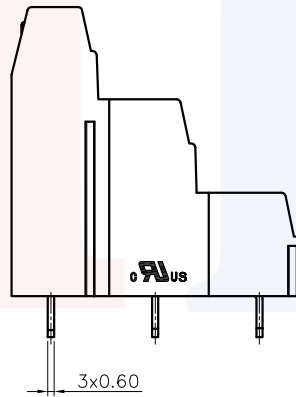

REVISION RECORD				
REV	ECN	DESCRIPTION	DRFT	DATE
A0		NEW		21.08.13

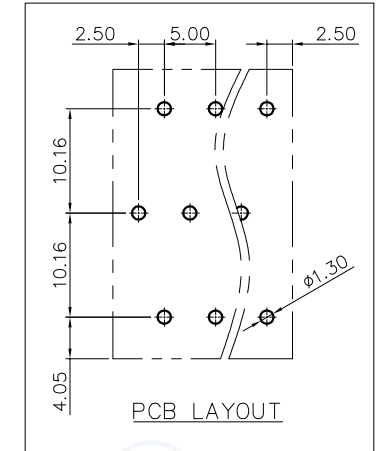

DRAW	SHUANGPING ZHENG	SCALE	FIT	JILN® DONGGUAN JINLING ELECTRONIC CO.,LTD 东莞市锦凌电子有限公司	
		UNIT	mm		
CHECK	LICHAD LIU	SIZE	A4	PART NO.	JL127A3-500XXG01
		SHEET	1/1		
APPROVE	YONGLIANG GAO	PROJ.		TITLE:	JL127A3-5.0-3xNP 螺钉式/直角/绿色