

HSF RoHS c^{us} CE

SPECIFICATIONS

Rated(额定参数): 300V,10A

Dielectric strength(抗电强度): AC2000V/1 Minute

Insulation Resistance(绝缘电阻):1000MΩ Min

Contact Resistance(接触电阻):20mΩ Max

Screw Torque(扭矩): 0.4Nm (3.5Lb.in)

Wire Range(线径):12~24AWG

Strip length(剥线长度):6~7mm

Temp. range(操作温度): -40℃~+105℃

MAX Soldering(瞬时温度):+250℃,5s

Housing Material(塑件): PA66 (UL94 V-0)

Contact(端子): Brass, Tin plating(黄铜镀锡)

Clamp(方块): Brass/Steel(铜/铁), Ni plating(镀镍)

Screw (螺丝): M2.5, Steel, Zinc plating(钢,镀锌)

PITCH RANGE IN MM			NOMINAL DIMENSION RANGE IN MM				
T0	OVER 6 TO 10	OVER 10 TO 24	T0	OVER 30 TO 60	OVER 60 TO 100	OVER 100 TO 150	OVER 150
±0.10	±0.15	±0.25	±0.30	±0.30	±0.50	±0.70	±1.00

Ordering Information






JL 128 - 500 XX X X 1

Pitch
500=5.0PH

No.of pins
2P,3P,4P~24P

Housing Color
B=Black
G=Green
U=Blue
R=Red
W=White
Y=Yellow
O=Orange
E=Grey

Packing
O=Pe bag
T=Tube
A=Tray

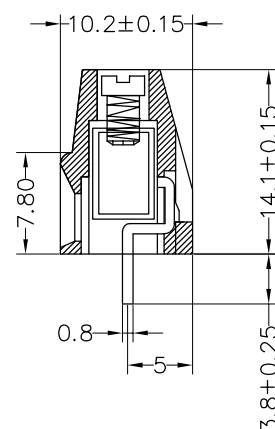

Recommended P.C.B Layout(Top Side)

OPERATION

X.X ±0.30

X.XX ±0.20

X.XXX ±0.10

Angle ±3°

DIM TOL

DRAW

BEN

17.01.04

SCALE

FIT

UNIT

mm

SIZE

A4

SHEET

1/1

PROJ.

1/1

JiLN®

深圳市锦凌电子有限公司

SHENZHEN JINLING ELECTRONIC CO.,LTD

Tel: 86-755-2997-5806/5802 Fax: 86-755-2997-5992

PART NO.

JL128-500XXX1

TITLE:

5.00mm Terminal Blocks Female 180°