

HSF RoHS

SPECIFICATIONS

PERFORMANCE

Electical Rating: AC/DC 50V 0.5A

Insulation Resistance: 500M Ω

Withstang Volt: 200V AC/minute

Opratng Temperature: -40 $^{\circ}$ to+125 $^{\circ}$

Material

Contact: Phosphor Bronze Gold-Plated

Housing: LCP

NO.OF Contacts	Dimensions		
	A	B	C
20pin	7.20	4.50	6.60
30pin	9.70	7.00	9.10
32pin	10.20	7.50	9.60
36pin	11.20	8.50	10.60
40pin	12.20	9.50	11.60
50pin	14.70	12.00	14.10
60pin	17.20	14.50	16.60
80pin	22.20	19.50	21.60
100pin	27.20	24.50	26.60

Ordering Information

3720 F XXX 043 XX F X 02



F=Female
M=Male

No.of pins
20~100P



Plastic Height
043=4.3mm

Contact Plating
G0:Gold Flash
G1:3U" Gold
G2:5U" Gold
G3:10U" Gold
G4:15U" Gold
G5:30U" Gold
S0:Gold Flash/Tin


Packing
T=Tube
R=Reel

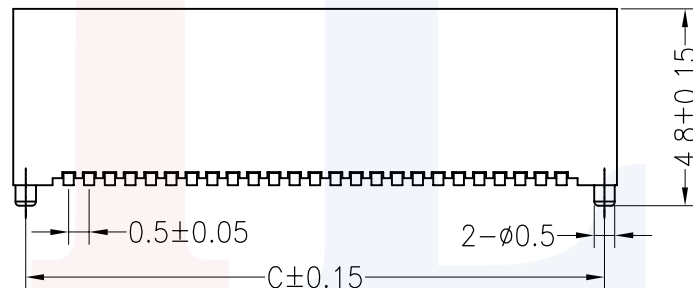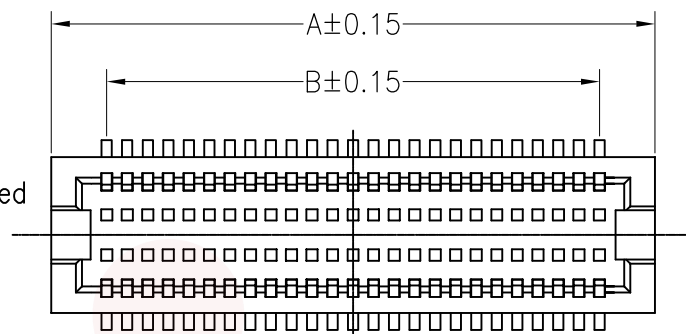

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE $\pm$ 0.05)

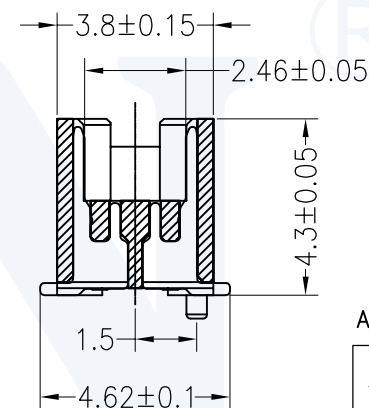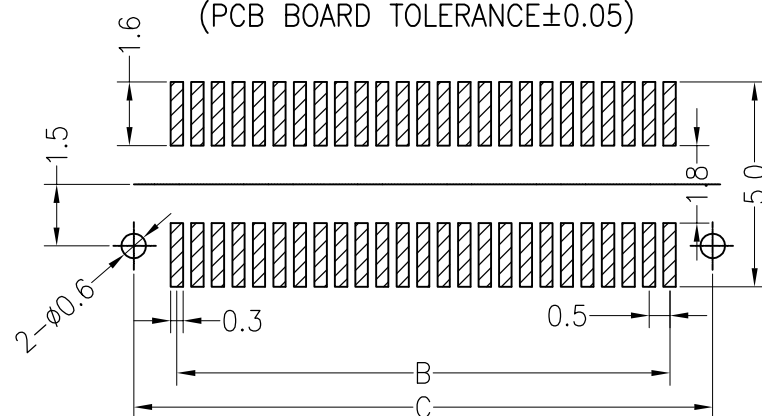

ASSEMBLY



OPERATION

DRAW

BEN

12.03.28

SCALE

FIT

JiLN®

深圳市锦凌电子有限公司

SHENZHEN JINLING ELECTRONIC CO.,LTD

Tel: 86-755-2997-5806/5802 Fax: 86-755-2997-5992

X.X $\pm$ 0.30

X.XX $\pm$ 0.20

X.XXX $\pm$ 0.10

Angle $\pm$ 3 $^{\circ}$

DIM TOL

CHECK

APPROVE

UNIT mm

SIZE A4

SHEET 1/1

PROJ.

PART NO.

3720FXX043XXFX02

TITLE:

0.5BTB NPin H4.3 Female

A0 2012.03.28 NEW DRAWING

REV DATE MODIFICATION DESCRIPTION

CHANGE