







HSF RoHS

**SPECIFICATIONS
PERFORMANCE**

Electical Rating: AC/DC 50V 0.5A
Insulation Resistance: 500MΩ Min
Withstang Volt: 200V AC/minute
Opratng Temperature: -40℃ to +125℃

Material

Contact: Phosphor Bronze Gold-Plated
Housing: LCP UL94V0
Max. Processing Temp: 260℃±5℃ 5S

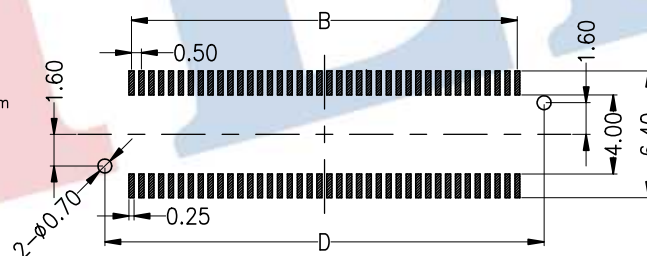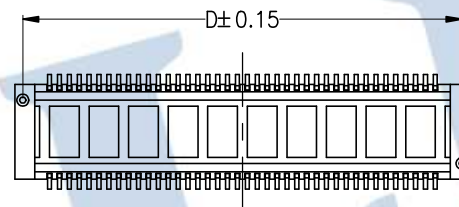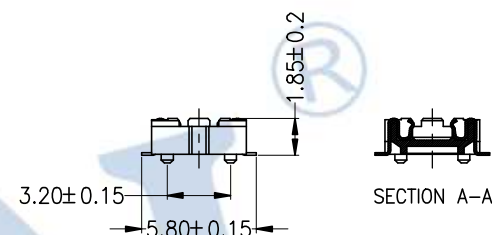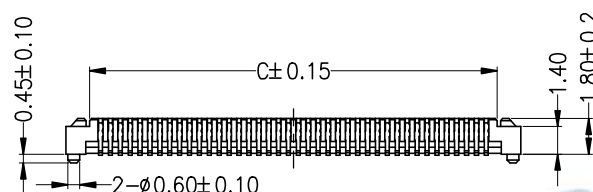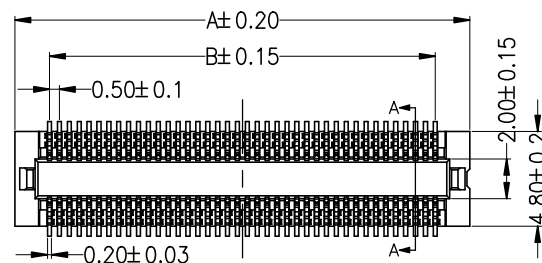

Ordering Information

3720 F XXX 018 XX X X 0X

F=Female
M=Male

No. of pins
80P

Plastic Hight
018=1.85mm

Contact Plating
G0: Gold Flash
G1: 3U" Gold
G2: 5U" Gold
G3: 10U" Gold
G4: 15U" Gold
S0: 1.5U" Gold/Tin
S1: 3U" Gold/Tin

Insulator Material
Option
D=BK-PA46
E=BK-PA9T
F=BK-LCP

Packing
T: Tube
R: Reel

code stream
01~99

P.C.B Layout

Dimension Table				
No Of Pins	Dim A	Dim B	Dim C	Dim D
80	23.00	19.50	20.60	22.20

				OPERATION		DRAW	Jelly Feng	2023.06.30	SCALE	FIT	JILN® 深圳市锦凌电子有限公司 SHENZHEN JINLING ELECTRONICS CO.,LTD Tel: 86-755-27483253 Fax: 86-755-2997-5588	
				X.X	±0.30				UNIT	mm		
				X.XX	±0.20	CHECK			SIZE	A4	PART NO.	3720FXXX018XXX0X
				X.XXX	±0.10		SHEET	1/1				
A0	2022.06.30	NEW DRAWING		Angle	±3°	APPROVE			PROJ.		TITLE:	P型 0.5mm BTB NPin H1.85 Female
REV	DATE	MODIFICATION DESCRIPTION		CHANGE	DIM TOL							