

1 2 3 4 5 6 7 8 9

HSF RoHS

SPECIFICATIONS

PERFORMANCE

Electrical Rating:AC/DC 50V 0.5A

Insulation Resistance: 500MΩ Min

Contact Resistance:50mΩ Max

Withstand Volt:200V AC/minute

Oprating Temperature:−40°C to +105°C

Material

Contact:Phosphor Bronze Gold-Plated

Housing:PA46 UL94V0

Max.Processing Temp:260°C±5°C 5S

Ordering Information

3720 M 80 037 XX D X 0X

No. of Pins
80P

Plastics Height
H=3.7mm

Contact Plating
G1:1U" Gold
G2:1.5U" Gold
G3:2U" Gold
G4:3U" Gold
G5:5U" Gold
S0:Gold Flash/Tin
S1:Tin

Insulator Material Option
D=BK-PA46
F=BK-LCP


Packing

A=Tray




T=Tube

R=Reel+Cap

P=Tube+Cap

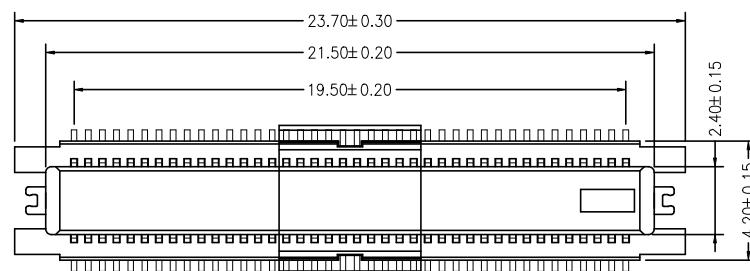

®

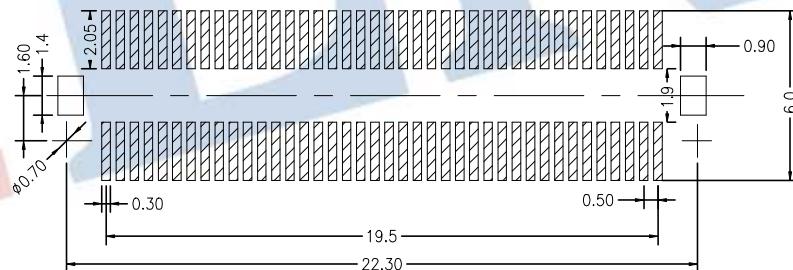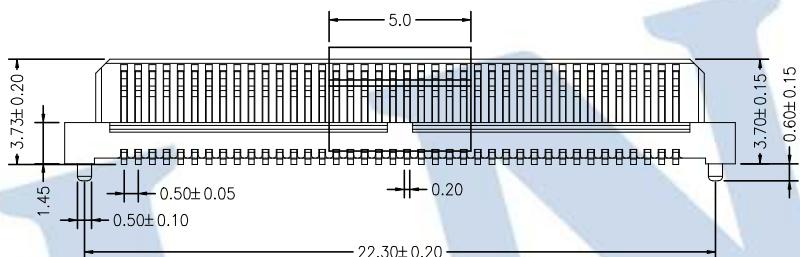

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

				OPERATION	DRAW	yiyusheng	20.10.29	SCALE	FIT	JILN® 深圳市锦凌电子有限公司
				X.XX ± 0.30				UNIT	mm	SHENZHEN JINLING ELECTRONICS CO.,LTD
				X.XX ± 0.20	CHECK			SIZE	A4	Tel : 86-755-27483253 Fax: 86-755-2997-5588
A	A0	2020.10.29	NEW DRAWING	X.XX ± 0.10				SHEET	1/1	PART NO.
	REV	DATE	MODIFICATION DESCRIPTION	Angle ± 3°	APPROVE			PROJ.	◆	3720M80037XXDX0X
				DIM TOL						TITLE: 0.5BTB-80P H3.7公座 带柱带定位片
	1	2	3	4	5	6	7	8	9	