



SPECIFICATIONS

Rated Current:3.0AMP

Contact Resistance:30mΩ Max

Withstand Voltage:1000V AC/DC

Insulation Resistance:1000MΩ Min

Operation Temperature:-40°C to +105°C




Contact Material:Brass

Contact Plating: Au or Sn Over Ni

Insulator Material:Polyester(UL94V-0)

Resistance To Soldering Heat:

245° C±5° C, 10s(PBT insulator)

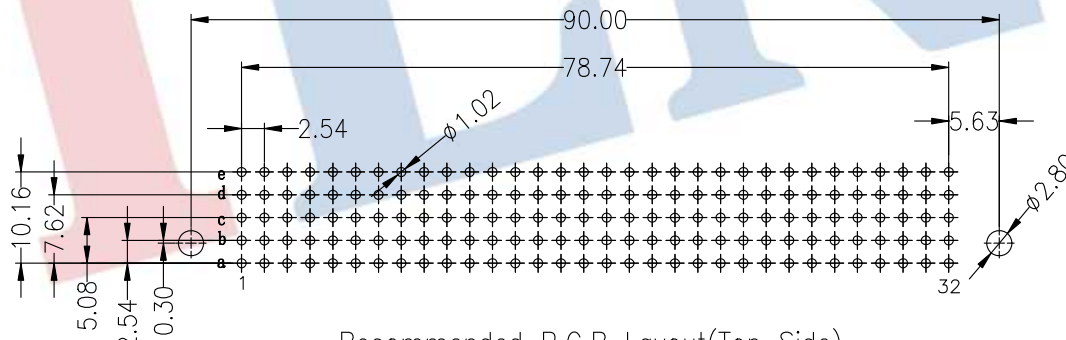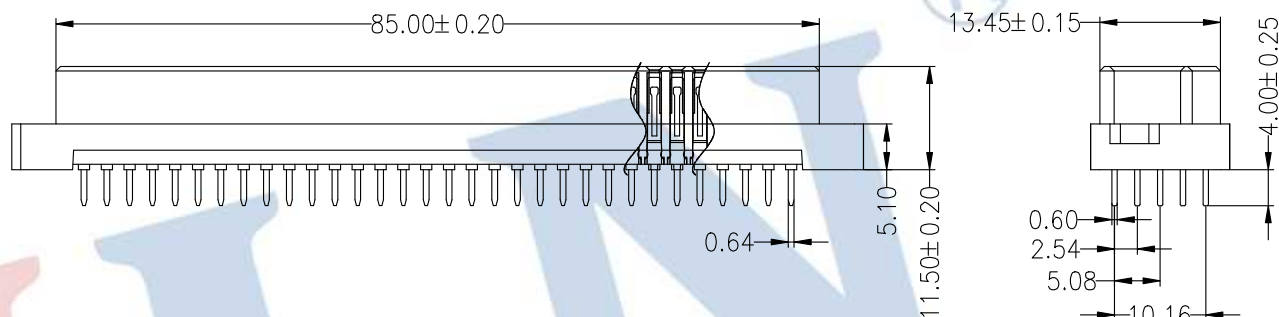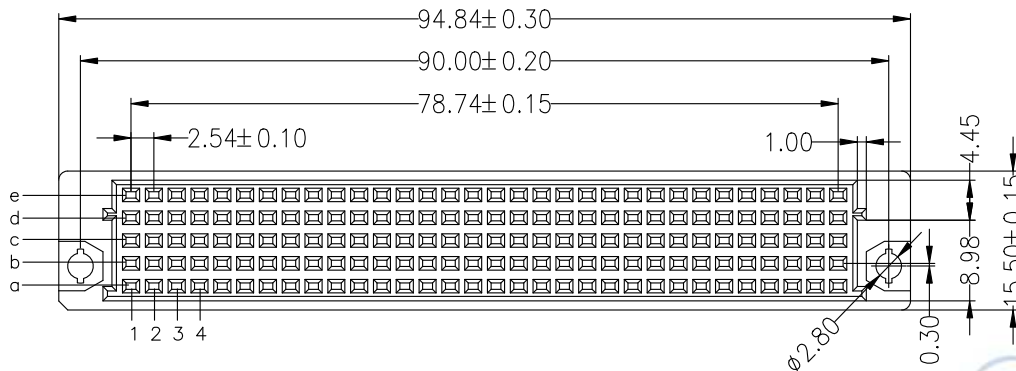

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

Ordering Information

3511 5 160 A F S XX B N A X

No.of Pins
160P

Contact Type
F=Female

Contact Plating
G0:Gold Flash
S0:Gold Flash/Tin
S1:2U" Gold/Tin
S2:5U" Gold/Tin
S3:10U" Gold/Tin
S4:15U" Gold/Tin
S5:30U" Gold/Tin
SN:Tin

Stream Code

JILN® 深圳市锦凌电子有限公司
SHENZHEN JINLING ELECTRONICS CO.,LTD

Tel: 86-755-27483253 Fax: 86-755-2997-5588

PART NO. 35115160AFSXXBNAX

TITLE: DIN 41612 5x32pin 180° Female DIP

				OPERATION		DRAW	YiYuSheng	18.10.20	SCALE	FIT
				X.X	± 0.30				UNIT	mm
				X.XX	± 0.20	CHECK			SIZE	A4
A0	2018.10.20	NEW DRAWING		X.XXX	± 0.10		SHEET	1/1		
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	Angle	± 3°	APPROVE			PROJ.	
				DIM	TOL					