HSF RoHS

SPECIFICATIONS
PERFORMANCE
Current rating: 0.4A
Voltage rating: 100V AC
Insulation Resistance: 1000MΩ min
Withstanding voltage: 300V AC/1 min
Contact Resistance: 45mΩ max
Opratng Temperature: −40°C to +105°C
Material
Contact: Phosphor Bronze
Housing: PA9T, UL94−V0
Soldering temperature: 260°C±5° 5S

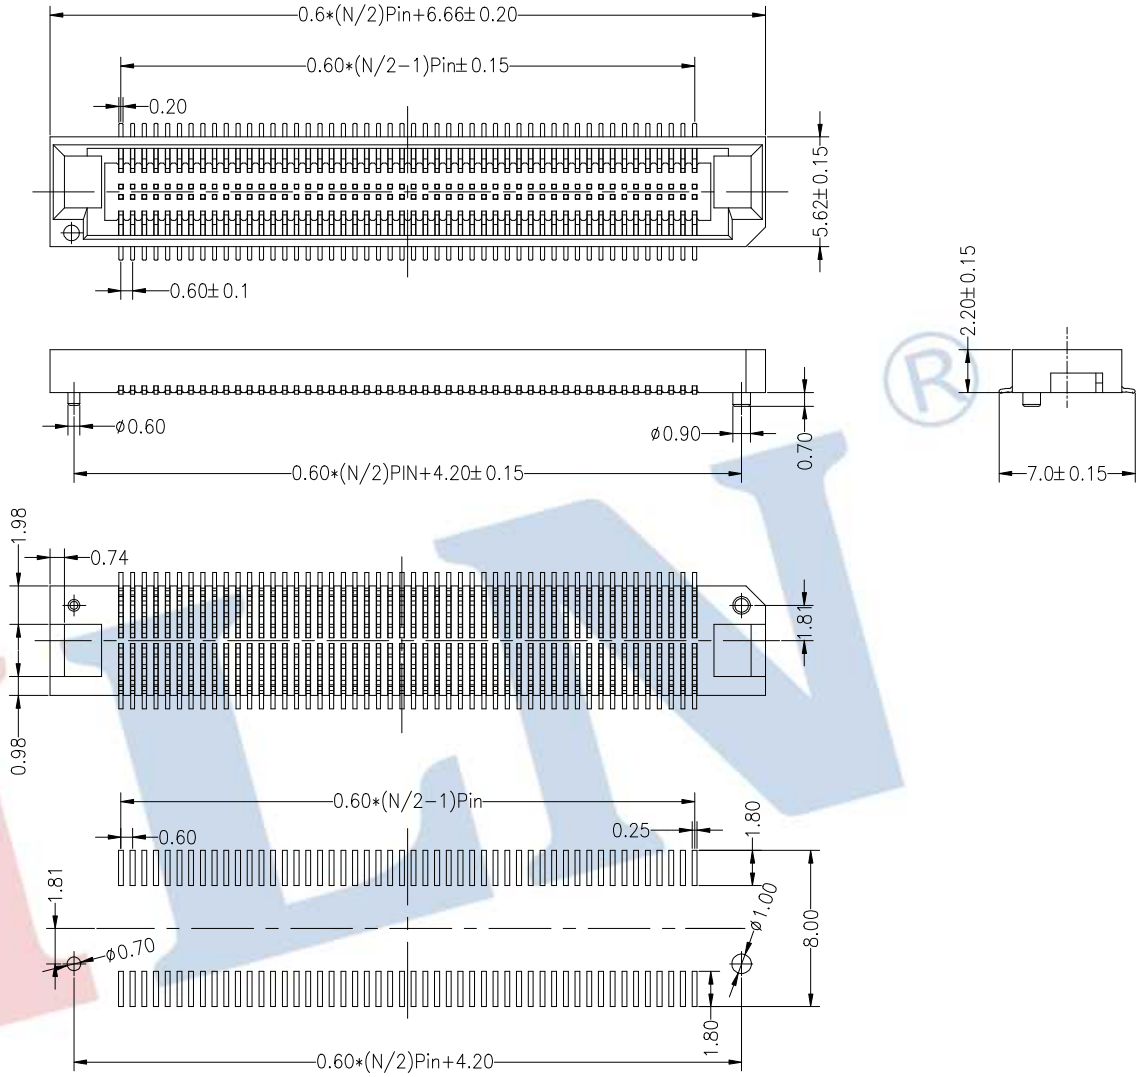

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

Ordering Information

3721 M XXX 022 XX E X 0X

- M: F=Female, M=Male
- XXX: No.of Pins, NPin, N=60,80,100
- 022: Plastic Hight, 022=2.2mm
- XX: Contact Plating, G2:1.5U" Gold, G3:2U" Gold, G4:3U" Gold, G5:10U" Gold, S0:Gold Flash/Tin
- X: Packing, R:Reel

REV	DATE	MODIFICATION DESCRIPTION	CHANGE
A0	2022.06.30	NEW DRAWING	

OPERATION				
DRAW	Jelly Feng	2022.06.30	X.X	±0.30
CHECK			X.XX	±0.20
			X.XXX	±0.10
APPROVE			Angle	±3°
			DIM	TOL

SCALE	FIT
UNIT	mm
SIZE	A4
SHEET	1/1
PROJ.	

JILN® 深圳市锦凌电子有限公司
SHENZHEN JINLING ELECTRONICS CO.,LTD
Tel：86-755-27483253 Fax：86-755-2997-5588

PART NO.	3721MXXX022XXEX0X
TITLE:	0.6BTB NPin H2.2 Male