



SPECIFICATIONS

Rated Current:3.0AMP

Contact Resistance:30mΩ Max

Withstand Voltage:1000V AC/DC

Insulation Resistance:1000MΩ Min

Operation Temperature:-40°c to +105°c

Contact Material:Copper Alloy

Contact Plating:Au or Sn Over Ni

Insulator Material:Polyester(UL94V-0)

Resistance To Soldering Heat:

245° C±5° C For 10 Second(PBT insulator)

Ordering Information

3511 3 XX A F S XX X W A X


No.of Pins
NPin
N=21、30、48、
96

Contact Type
F=Female

Contact Plating
G0:Gold Flash
S0:Gold Flash/Tin
S1:3U" Gold/Tin
S2:5U" Gold/Tin
S3:10U" Gold/Tin
S4:15U" Gold/Tin
S5:30U" Gold/Tin

Contact Material
B=Brass
P=Phosphor Bronze

Stream Code

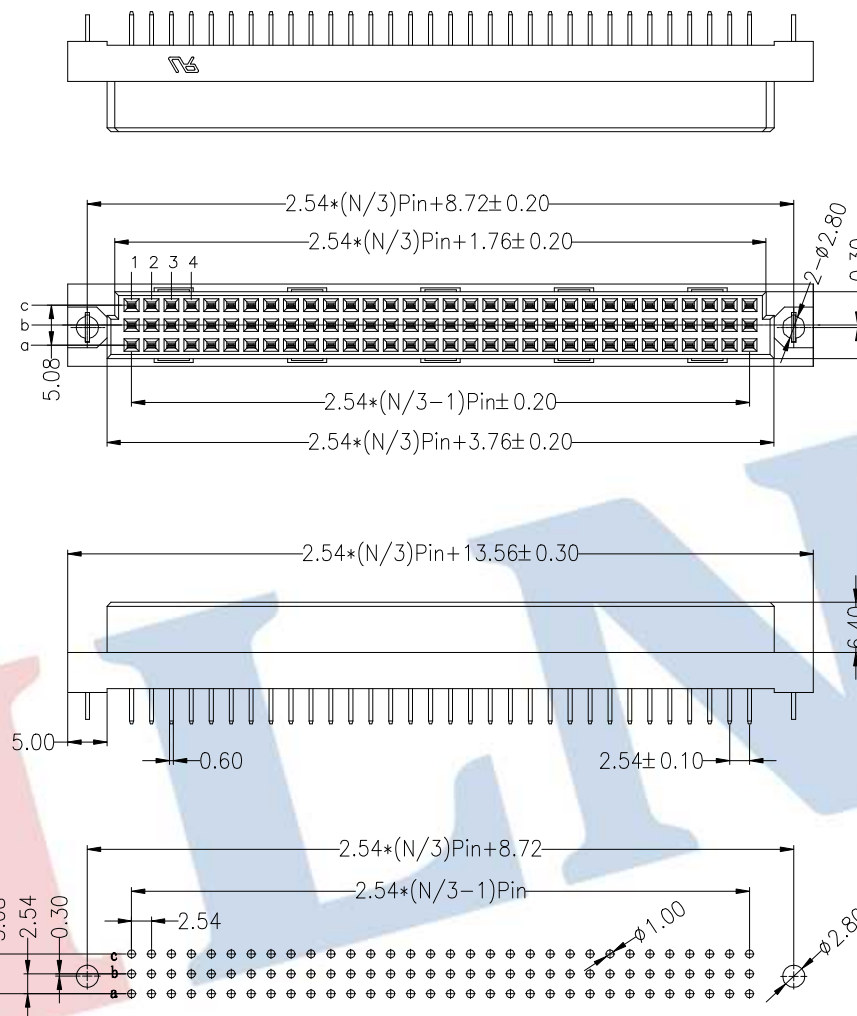

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE± 0.05)

Dimension antitheses list	
ITEM	A
Standard	4.00

OPERATION

DRAW

Jelly Feng

2023.03.29

SCALE

FIT

UNIT

mm

SIZE

A4

SHEET

1/1

PROJ.

1:1

JILN® 深圳市锦凌电子有限公司
SHENZHEN JINLING ELECTRONICS CO.,LTD
Tel: 86-755-27483253 Fax: 86-755-2997-5588

PART NO.

35113XXAFSXXXWAX

TITLE:

欧式插座 母座 180度 3xNPin 带鱼叉 成品系列图

X.X ±0.30

X.XX ±0.20

X.XXX ±0.10

Angle ±3°

DIM TOL

CHECK

APPROVE

A0

2023.03.29

NEW DRAWING

REV

DATE

MODIFICATION DESCRIPTION

CHANGE

1

2

3

4

5

6

7

8

9