



SPECIFICATIONS

Rated Current:3.0AMP

Contact Resistance:30mΩ Max

Withstand Voltage:1000V AC/DC

Insulation Resistance:1000MΩ Min

Operation Temperature:-40℃ to +105℃






Contact Material:Copper Alloy

Contact Plating:Au or Sn Over Ni

Insulator Material:Polyester(UL94V-0)

Resistance To Soldering Heat:

245℃±5℃ For 5~10 Second(PBT insulator)

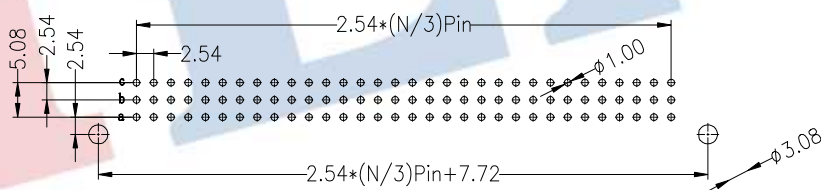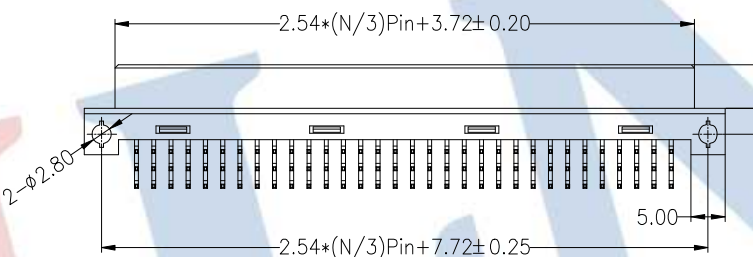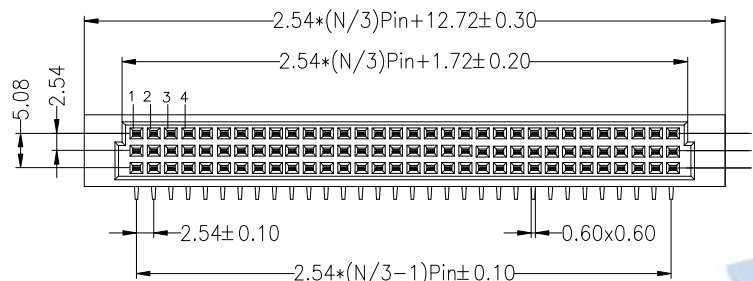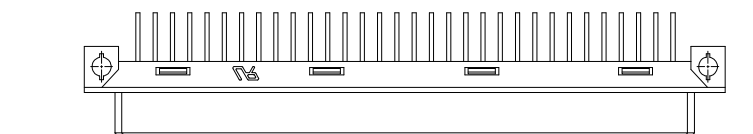

Ordering Information

35113 XX A F R XX X N A X

No. of Pins
NPin
N=21、30、
48、54、96

Contact Type
F=Female

Contact Plating
G0:Gold Flash
S0:Gold Flash/Tin
S1:3U" Gold/Tin
S2:5U" Gold/Tin
S3:10U" Gold/Tin
S4:15U" Gold/Tin
S5:30U" Gold/Tin

Contact Material
B=Brass
P=Phosphor Bronze

Stream Code

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

Dimension antitheses list

ITEM	A
Standard	2.90

OPERATION

X.X ±0.30

X.XX ±0.20

X.XXX ±0.10

Angle ±3°

DIM TOL

DRAW

Jelly Feng

2023.03.29

SCALE

FIT

UNIT

mm

SIZE

A4

SHEET

1/1

PROJ.

PROJ.

JILN® 深圳市锦凌电子有限公司
SHENZHEN JINLING ELECTRONICS CO.,LTD

Tel: 86-755-27483253 Fax: 86-755-2997-5588

PART NO.

35113XXAFRXXXNAX

TITLE:

欧式插座 母座 90度 无鱼叉 成品系列图

A

A0

2023.03.29

NEW DRAWING

REV

DATE

MODIFICATION DESCRIPTION

CHANGE

APPROVE

1

2

3

4

5

6

7

8

9