
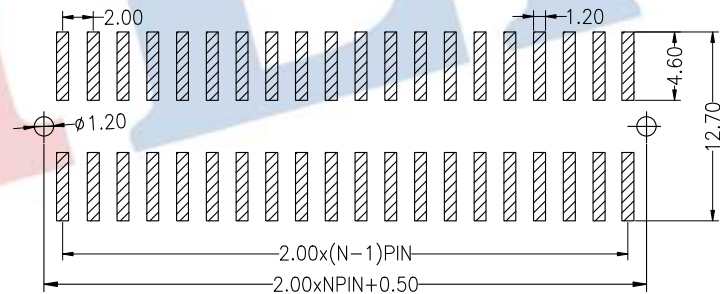
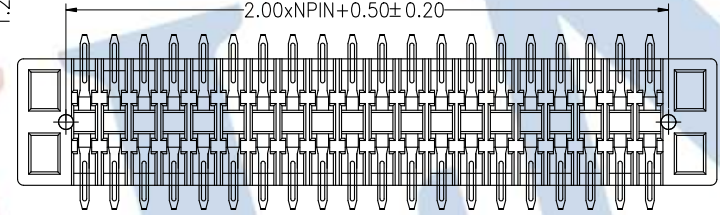

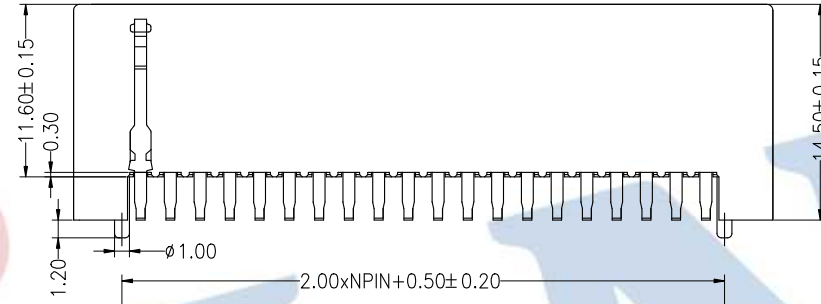


HSF RoHS

SPECIFICATIONS

Rated Current:2.0AMP
 Contact Resistance:20mΩ Max
 Withstand Voltage:500V AC/DC
 Insulation Resistance:500MΩ Min
 Operation Temperature:-40°C to +105°C

Contact Material:Phosphor bronze
 Contact Plating:Au or Sn Over Ni
 Insulator Material:Polyester(UL94V-0)
 Resistance To Soldering Heat:
 260°C ±5°C, 10s(PA9T insulator)

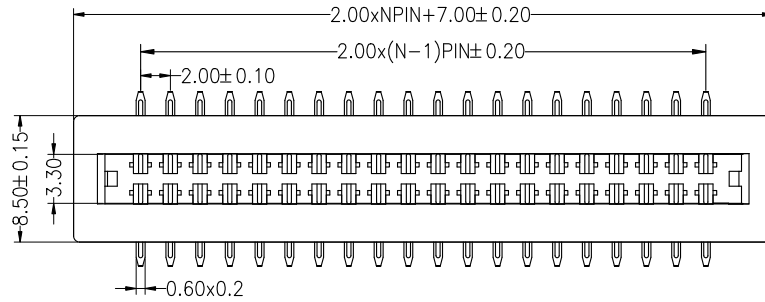

Recommended P.C.B Layout

Ordering Information

4400- 2 XX M XX F E B W 0 X

- No.of Pins
 - 2x15P
 - 2x20P
 - 2x23P
 - 2x25P
 - 2x27P
- Contact Plating
 - G0:Gold Flash
 - G1:1U" Gold
 - G2:2U" Gold
 - G3:3U" Gold
 - G4:5U" Gold
 - G5:10U" Gold

				OPERATION		DRAW	OuYangHui	17.11.03	SCALE	FIT	JILN ® 深圳市锦凌电子有限公司 SHENZHEN JINLING ELECTRONICS CO.,LTD Tel: 86-755-27483253 Fax: 86-755-2997-5588	
				X.X	±0.30				UNIT	mm		
				X.XX	±0.20	CHECK	SIZE	A4				
				X.XXX	±0.10	APPROVE	SHEET	1/1				
A0	2017.11.03	NEW DRAWING		Angle	±3°			PROJ.	TITLE:	PART NO.	4400-2XXMXXFEBW0X	
REV	DATE	MODIFICATION DESCRIPTION		DIM	TOL					TITLE:	2.0金手指连接器 2XNP 母座H14.5 SMT 带柱	