




SPECIFICATIONS

Rated Current:3.0AMP
 Contact Resistance:30mΩ Max
 Withstand Voltage:1000V AC/DC
 Insulation Resistance:1000MΩ Min
 Operation Temperature:-40℃ to +105℃

Contact Material:Phosphor Bronze
 Contact Plating:Au or Sn Over Ni
 Insulator Material:Polyester(UL94V-0)
 Resistance To Soldering Heat:
 245℃±5℃ For 5~10 Second(PBT insulator)

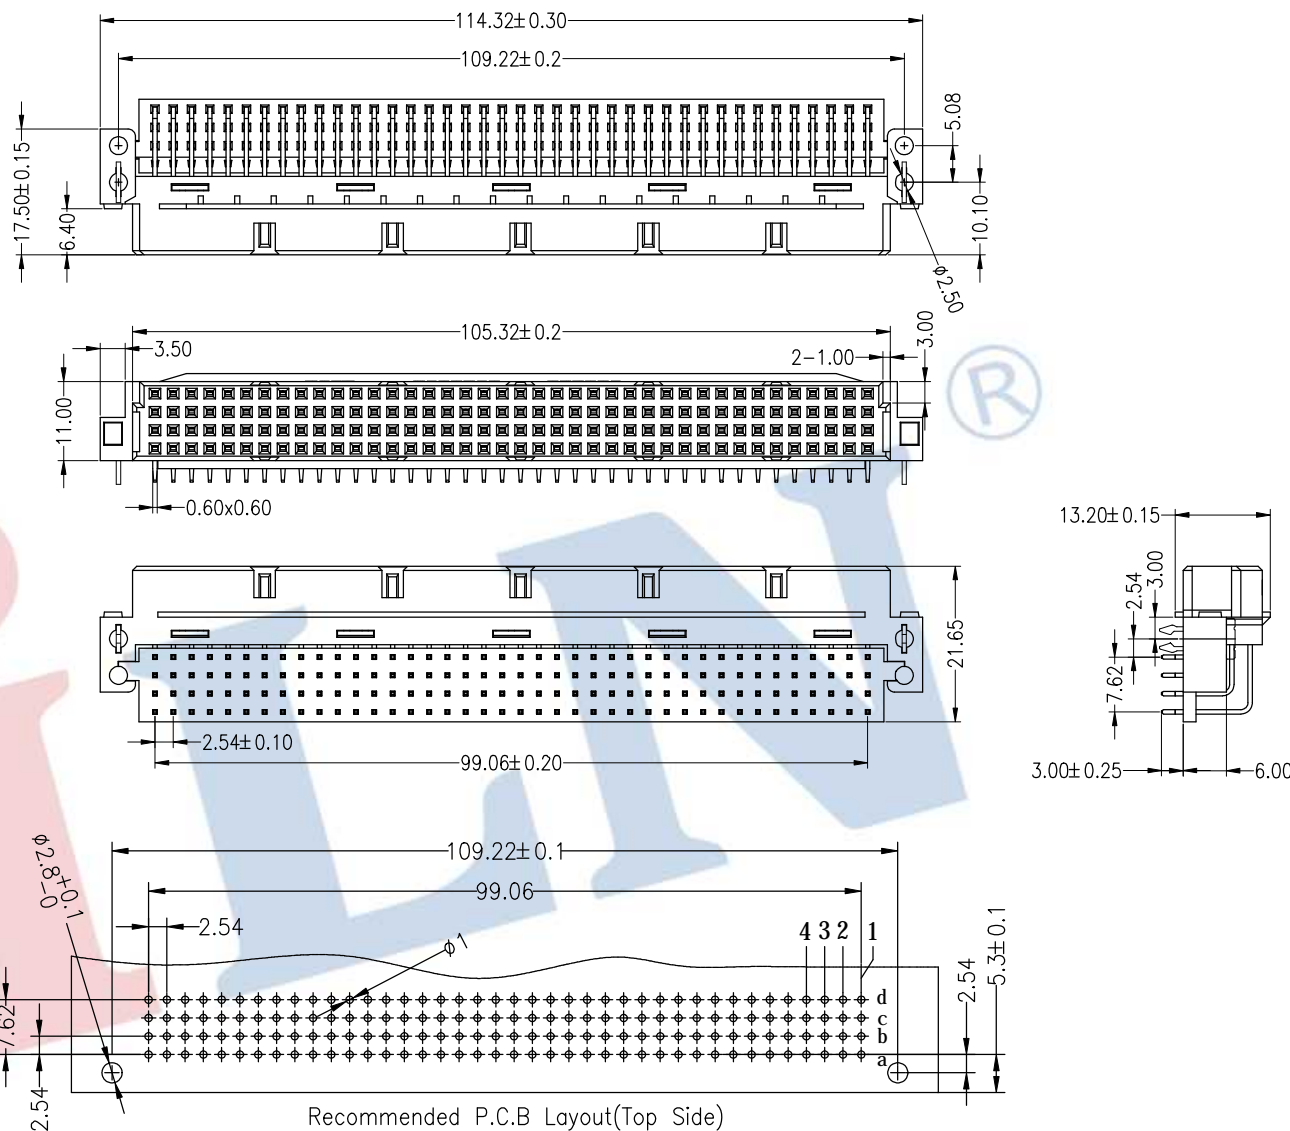

Ordering Information

35114 160 A F R XX B W A X

No. of Pins: NPin, N=160
 Contact Type: F=Female
 Contact Plating: G0:Gold Flash, S0:Gold Flash/Tin, S1:3U" Gold/Tin, S2:5U" Gold/Tin, S3:10U" Gold/Tin, S4:15U" Gold/Tin, S5:30U" Gold/Tin
 Stream Code

Recommended P.C.B Layout(Top Side)
 (PCB BOARD TOLERANCE±0.05)

				OPERATION		DRAW	Jelly Feng	2023.03.29	SCALE	FIT	JILN ® 深圳市锦凌电子有限公司 SHENZHEN JINLING ELECTRONICS CO.,LTD Tel: 86-755-27483253 Fax: 86-755-2997-5588	
				X.X	±0.30				UNIT	mm		
				X.XX	±0.20	CHECK			SIZE	A4	PART NO. 35114160AFRXXXWAX	
				X.XXX	±0.10				SHEET	1/1		
A0	2023.03.29	NEW DRAWING		Angle	±3°	APPROVE			PROJ.		TITLE: 欧式插座 四排母座 90度 带鱼叉 成品系列图	
REV	DATE	MODIFICATION DESCRIPTION		DIM	TOL							