
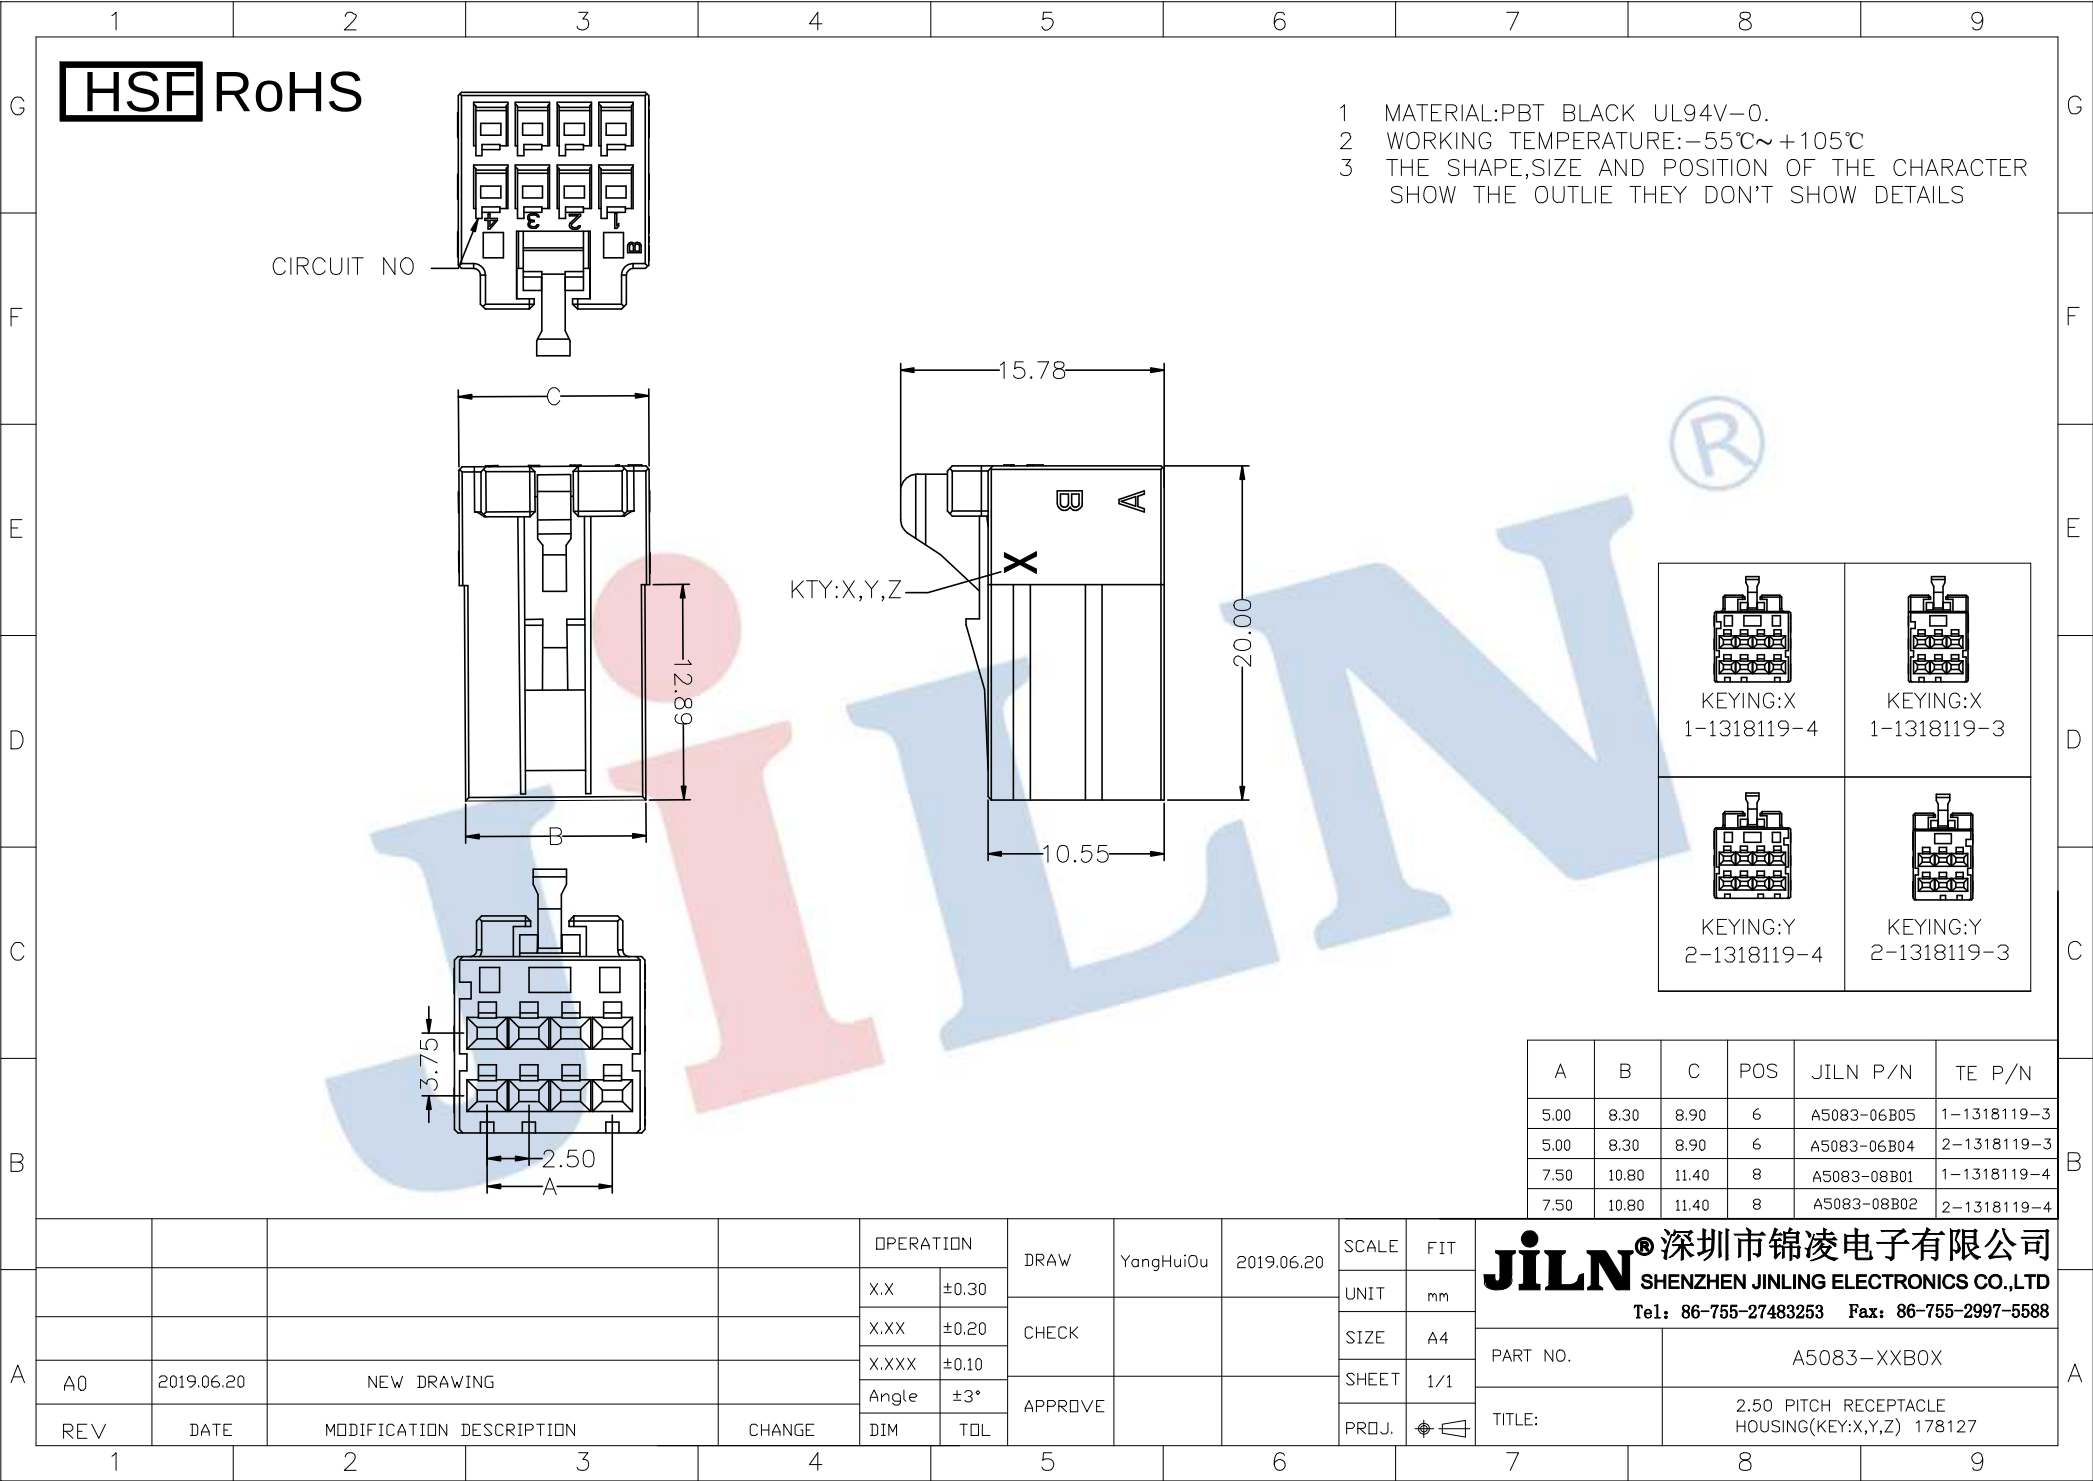
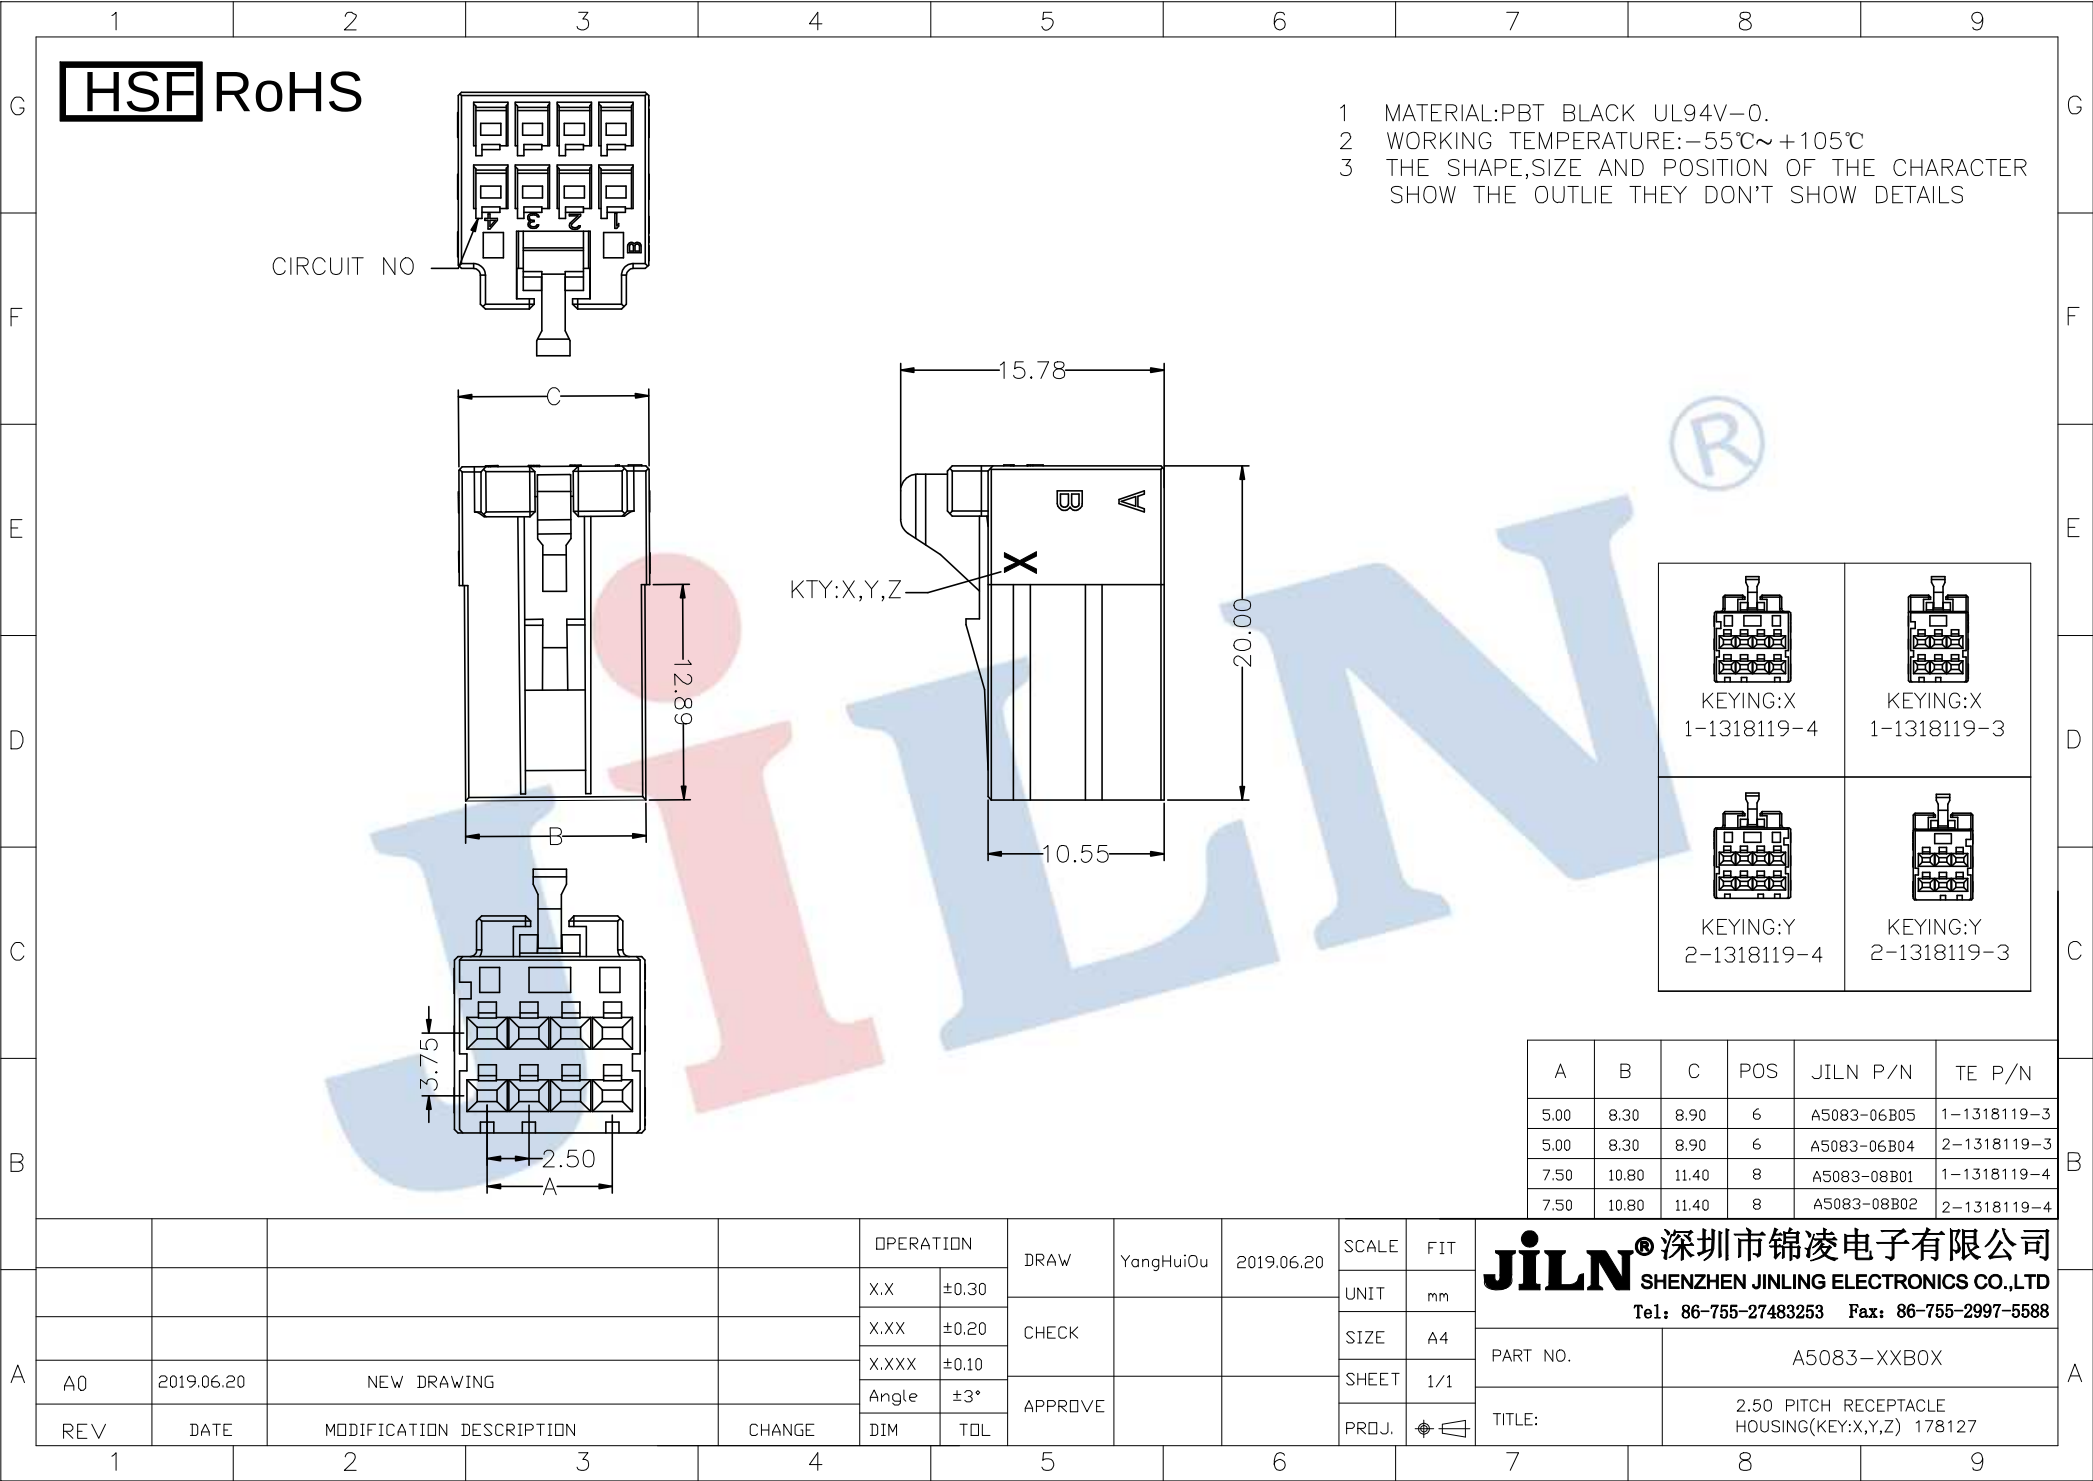
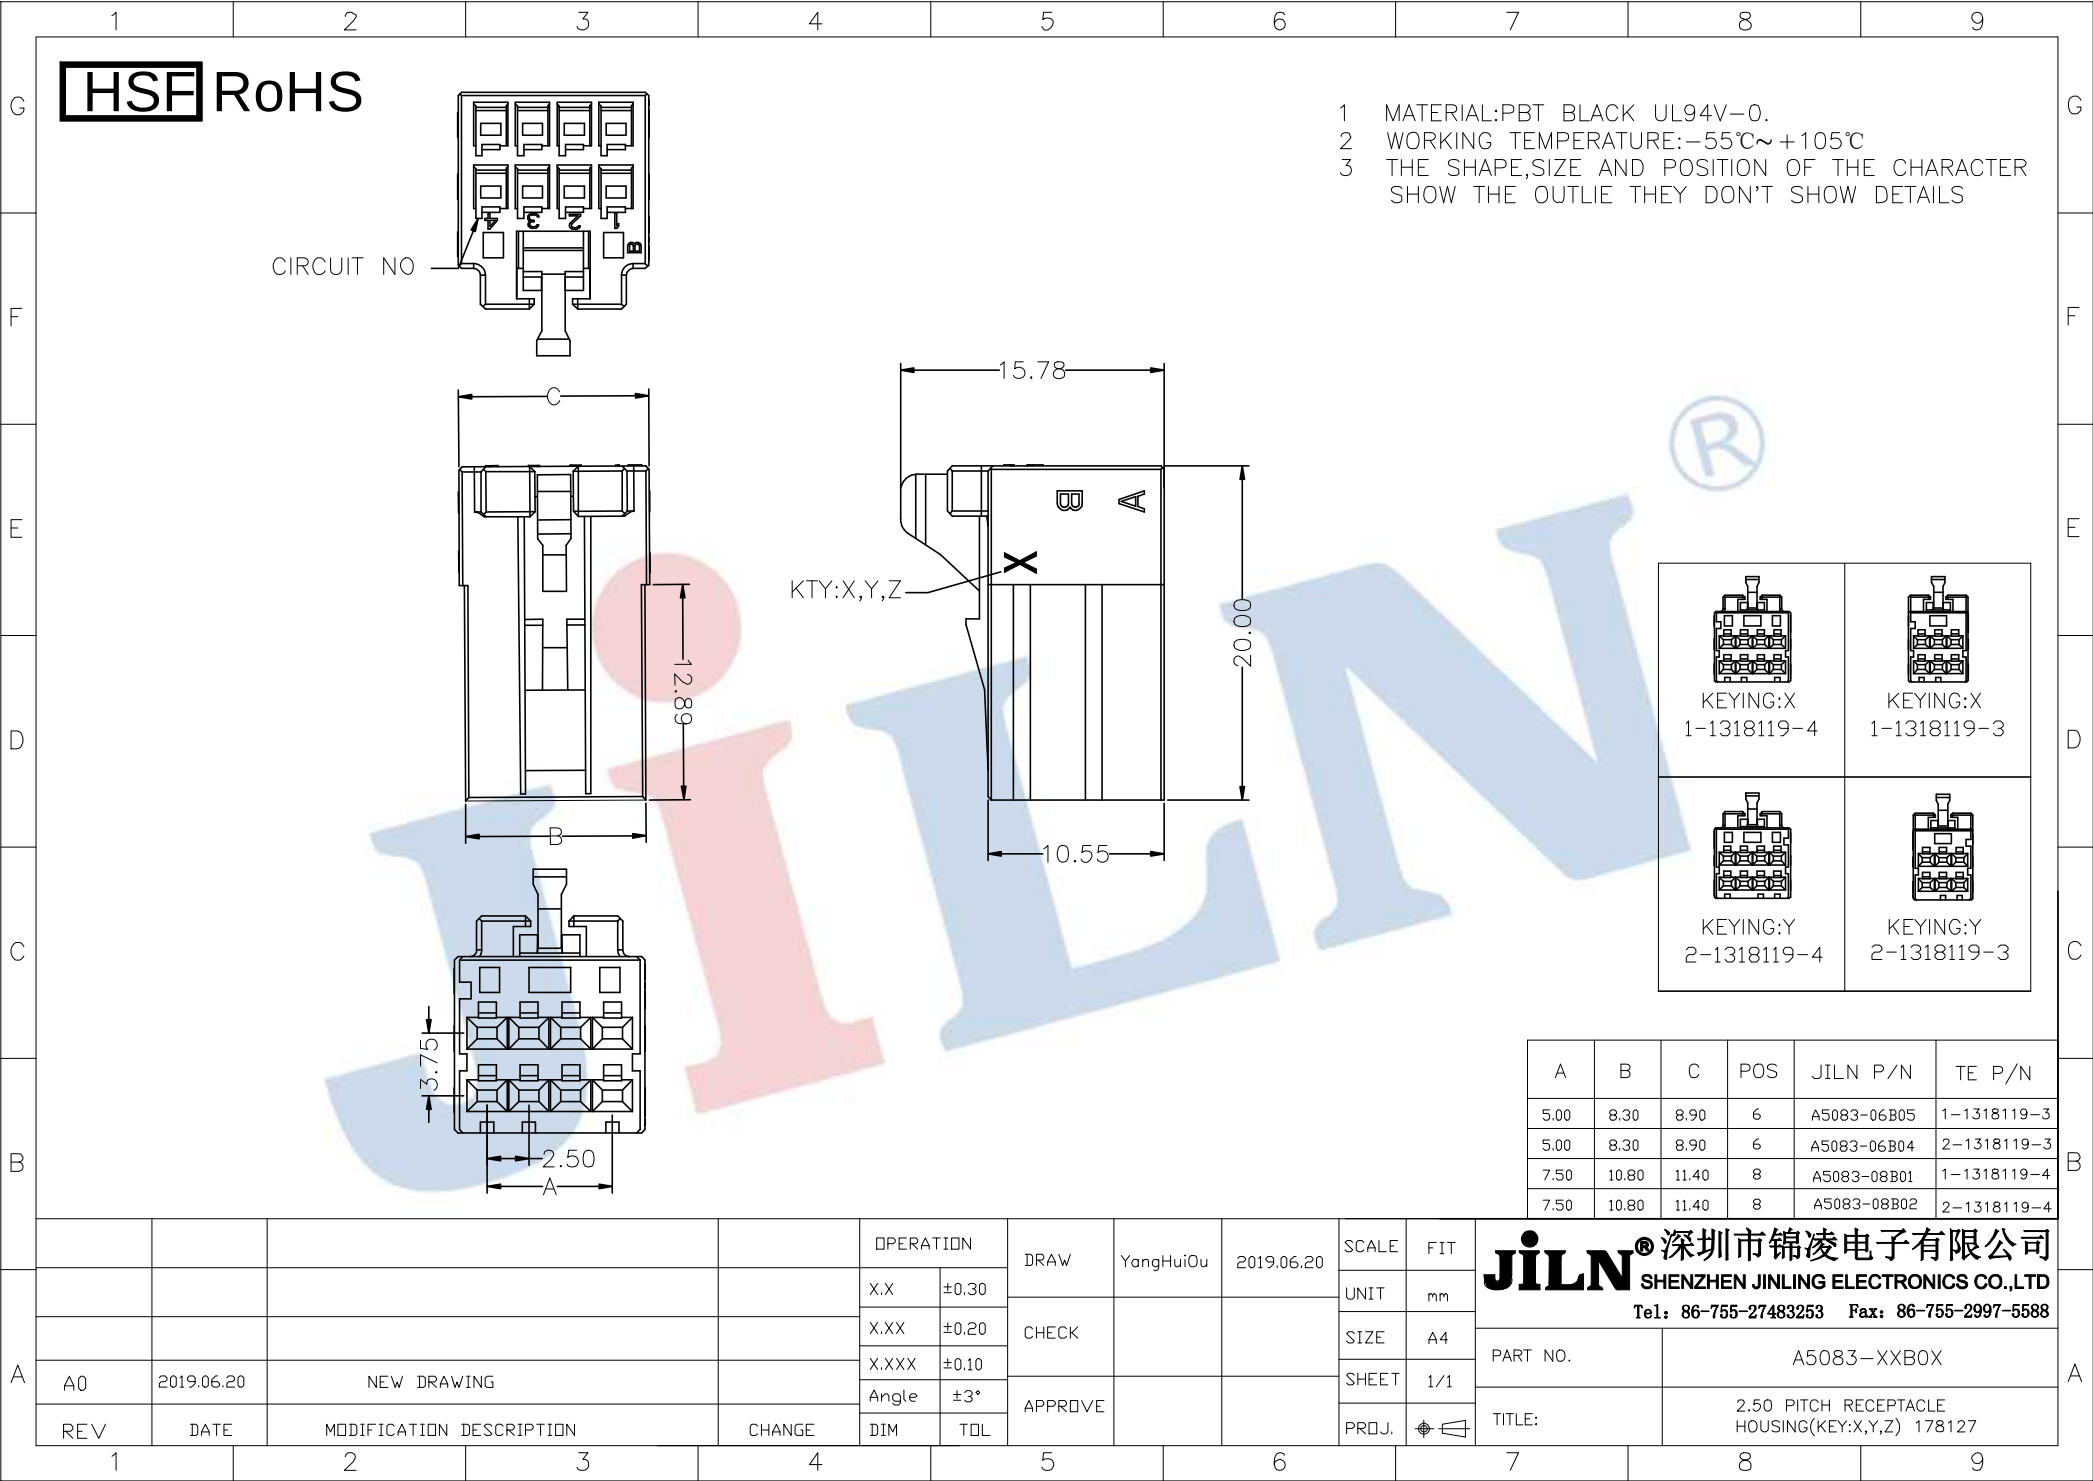
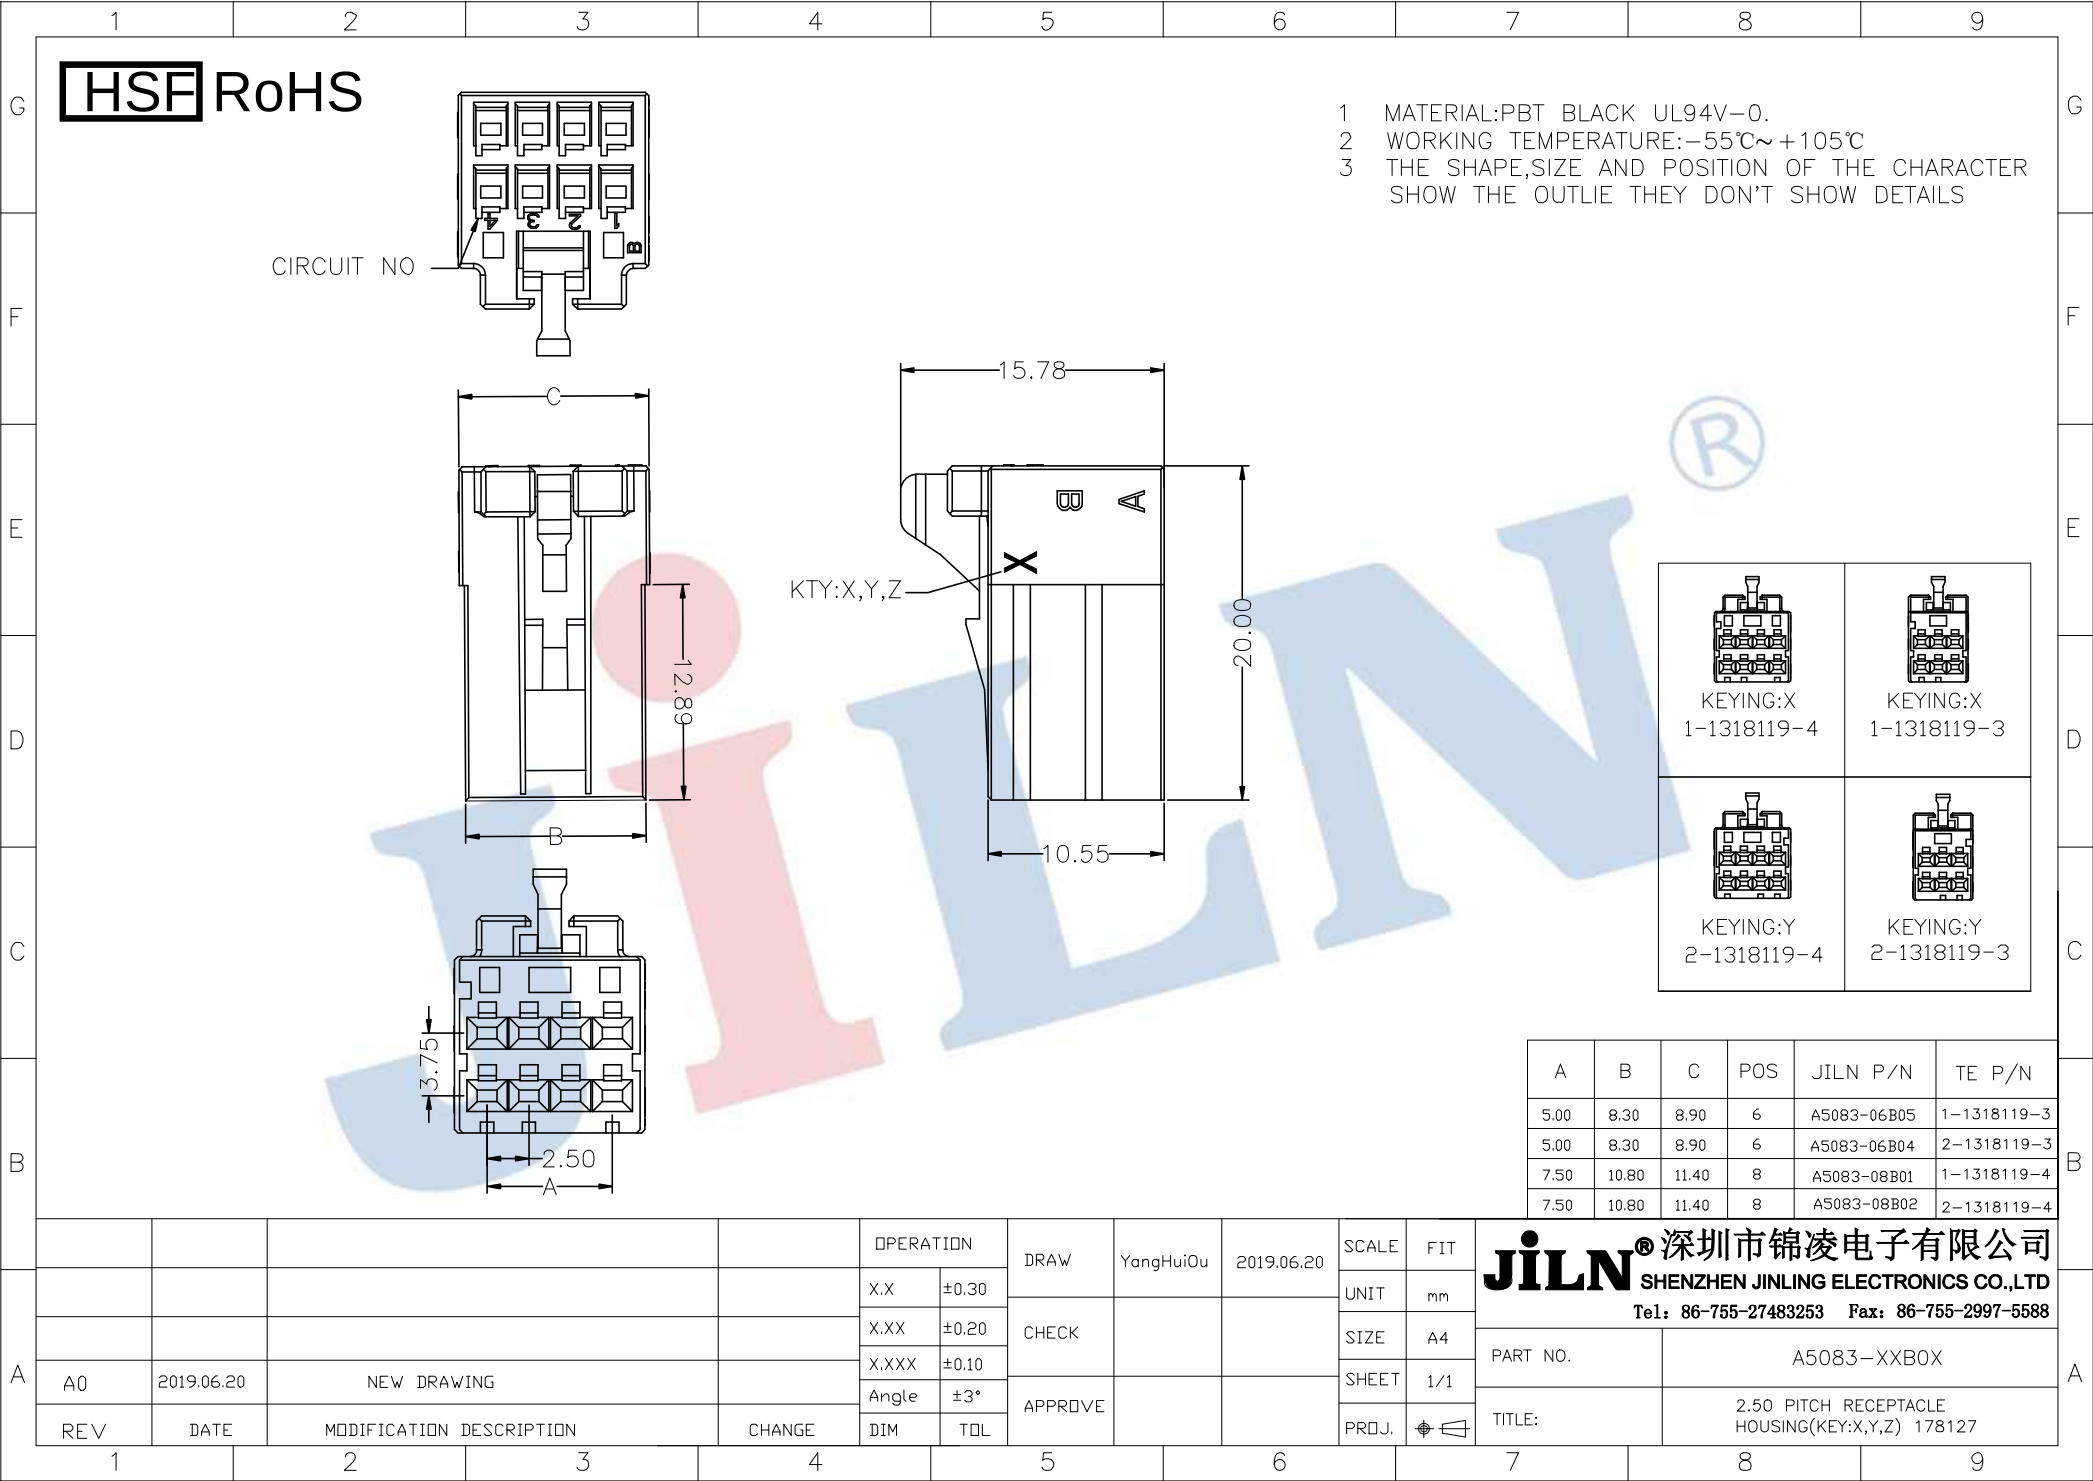
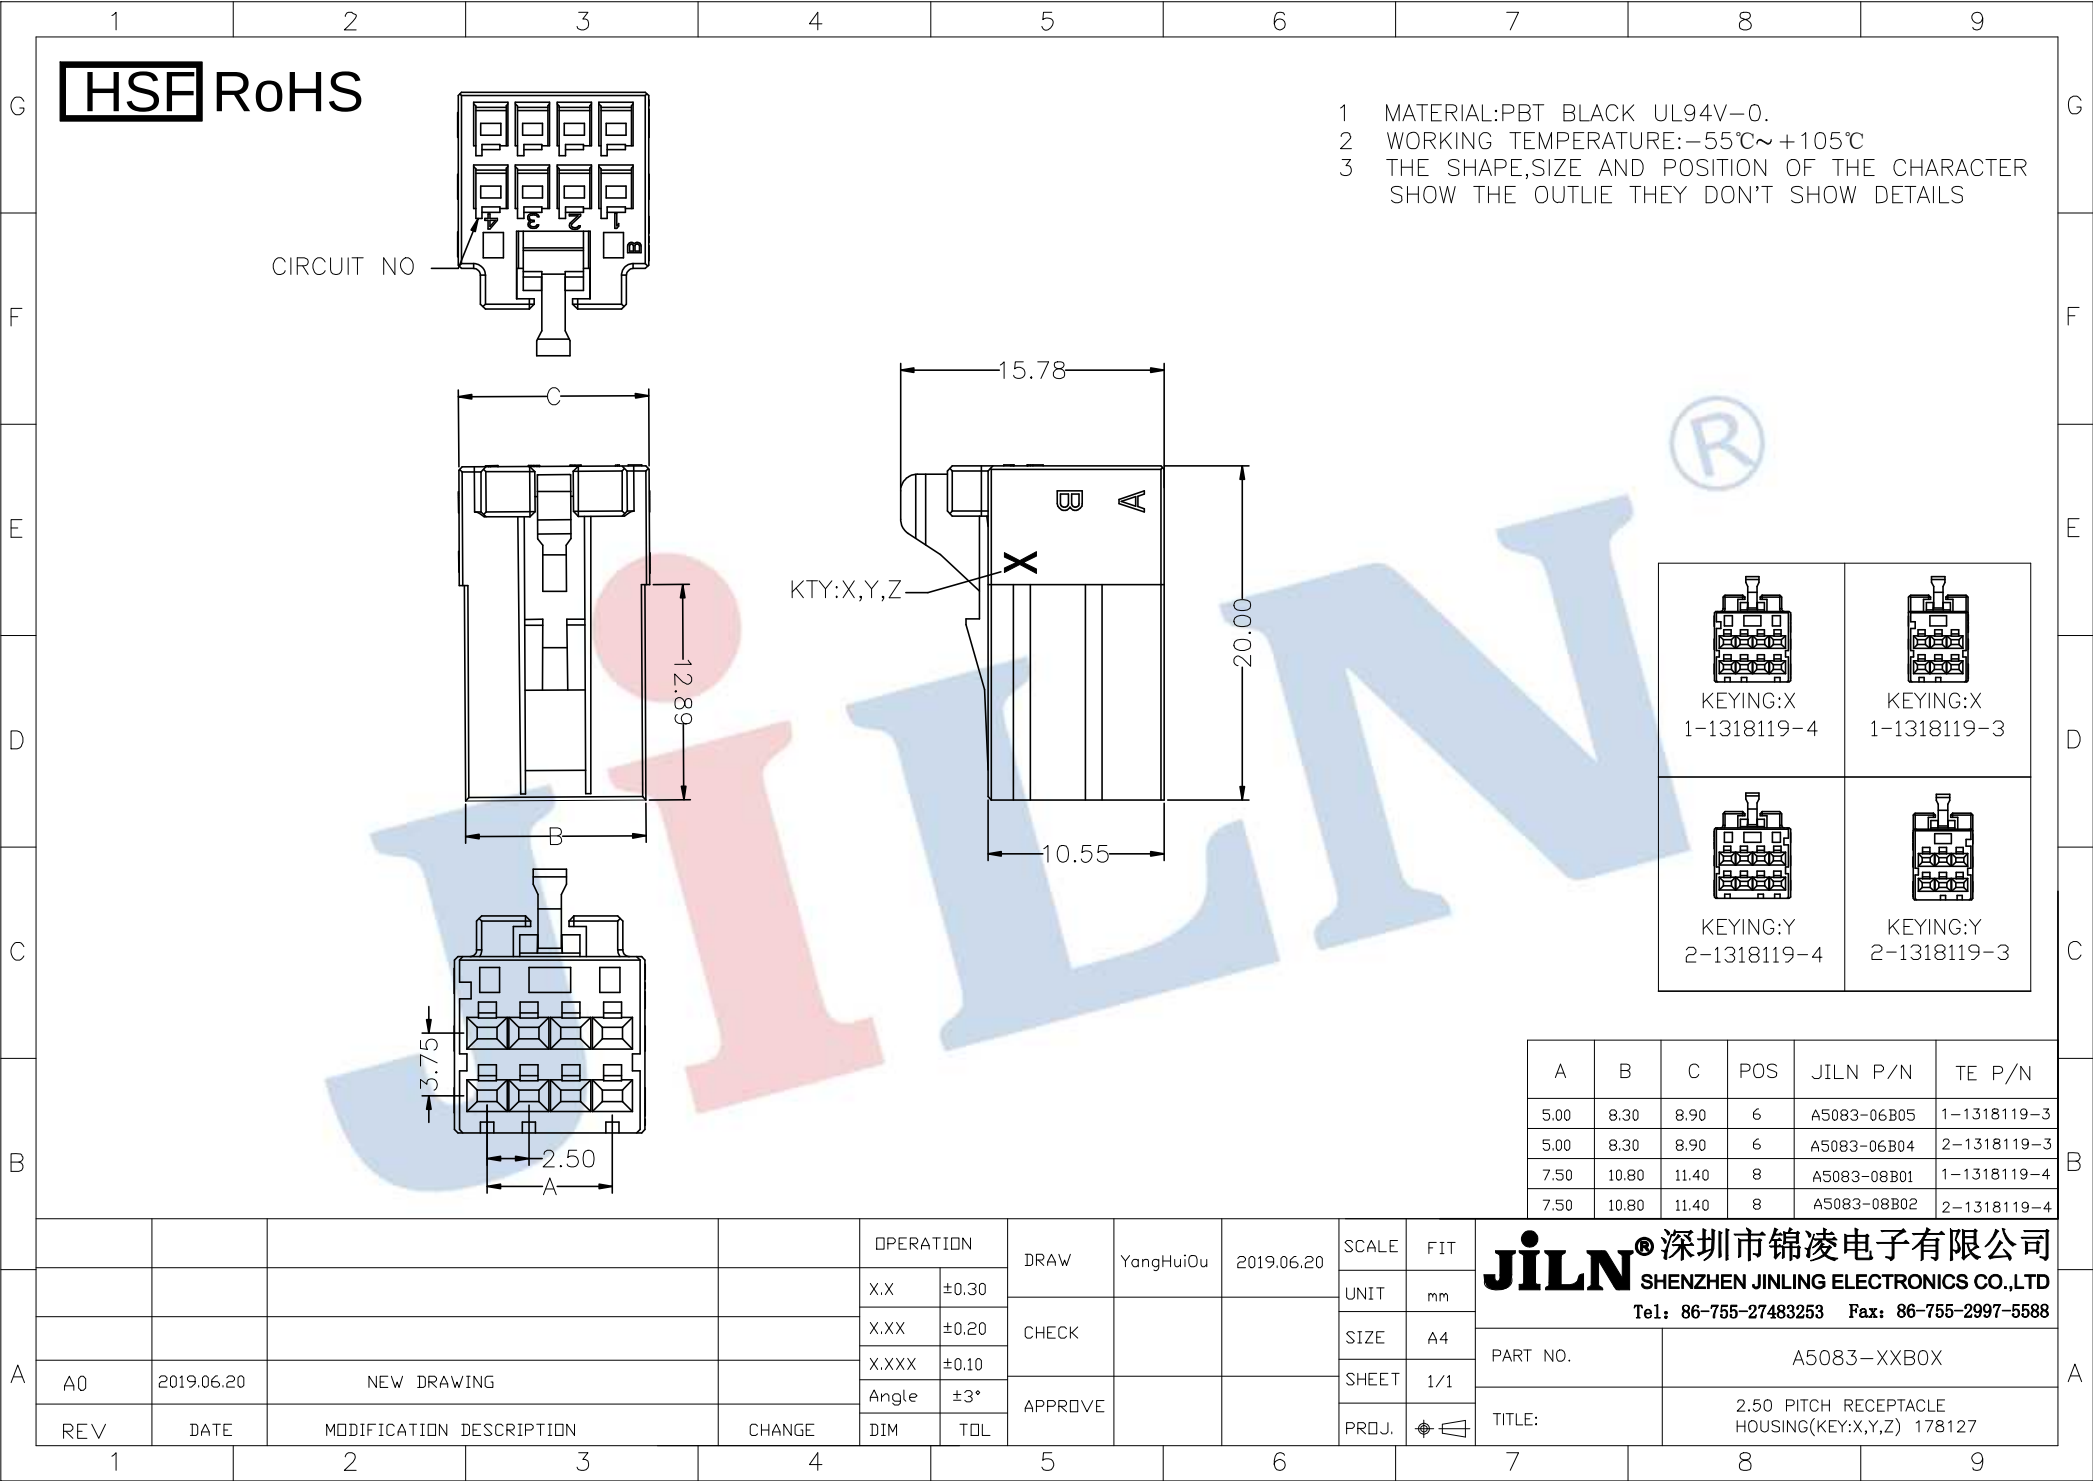
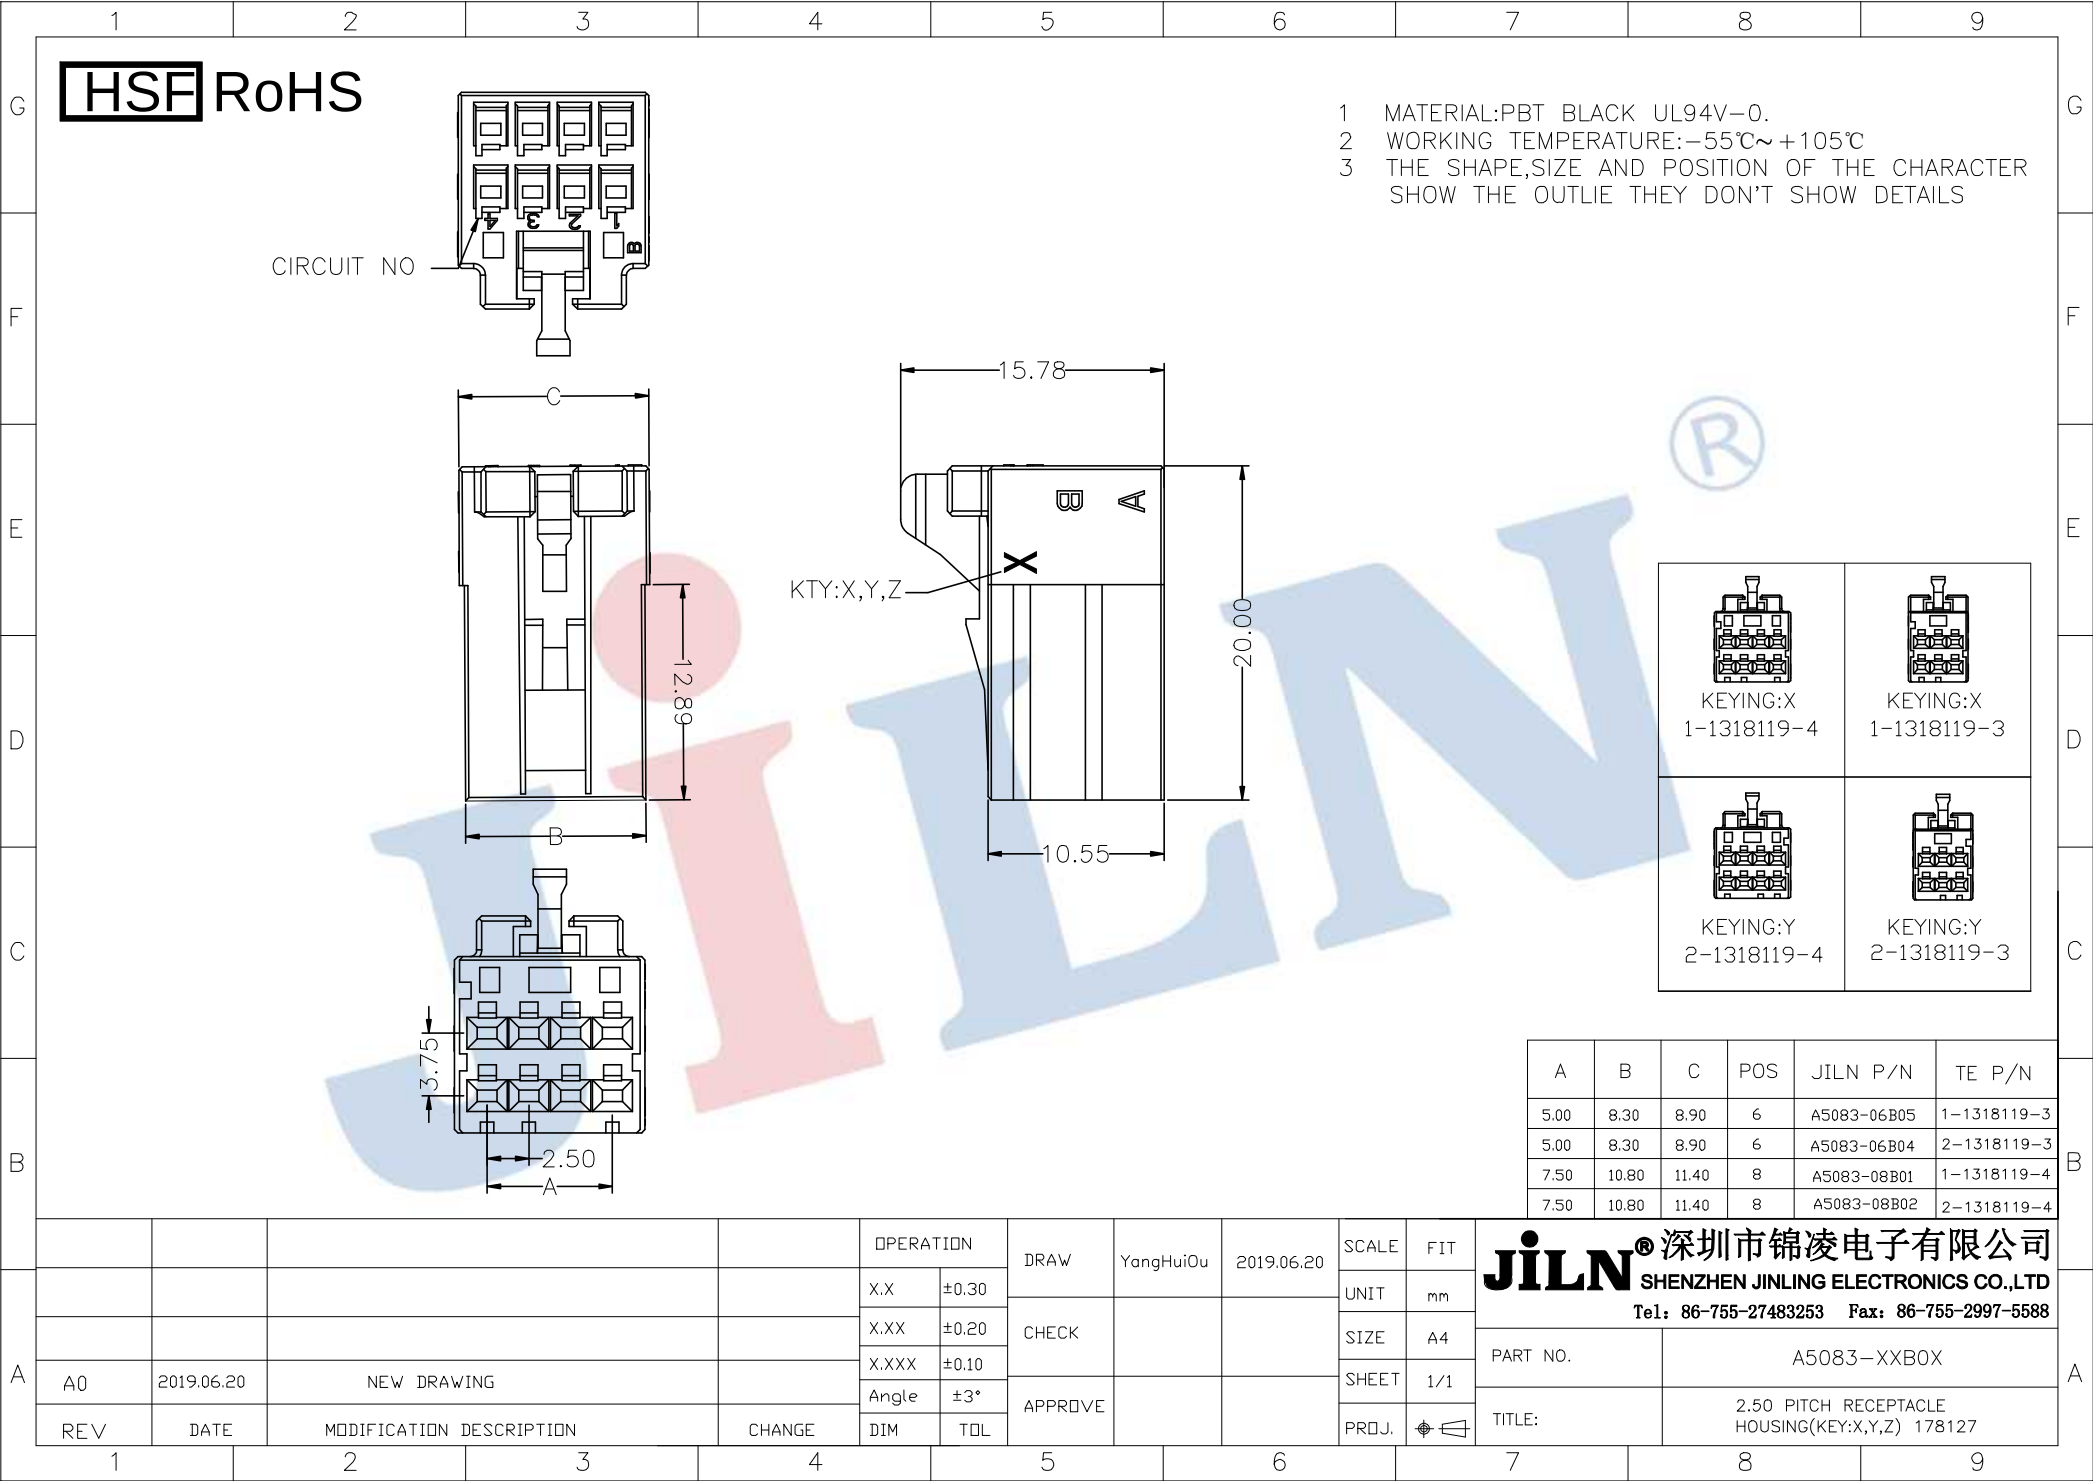
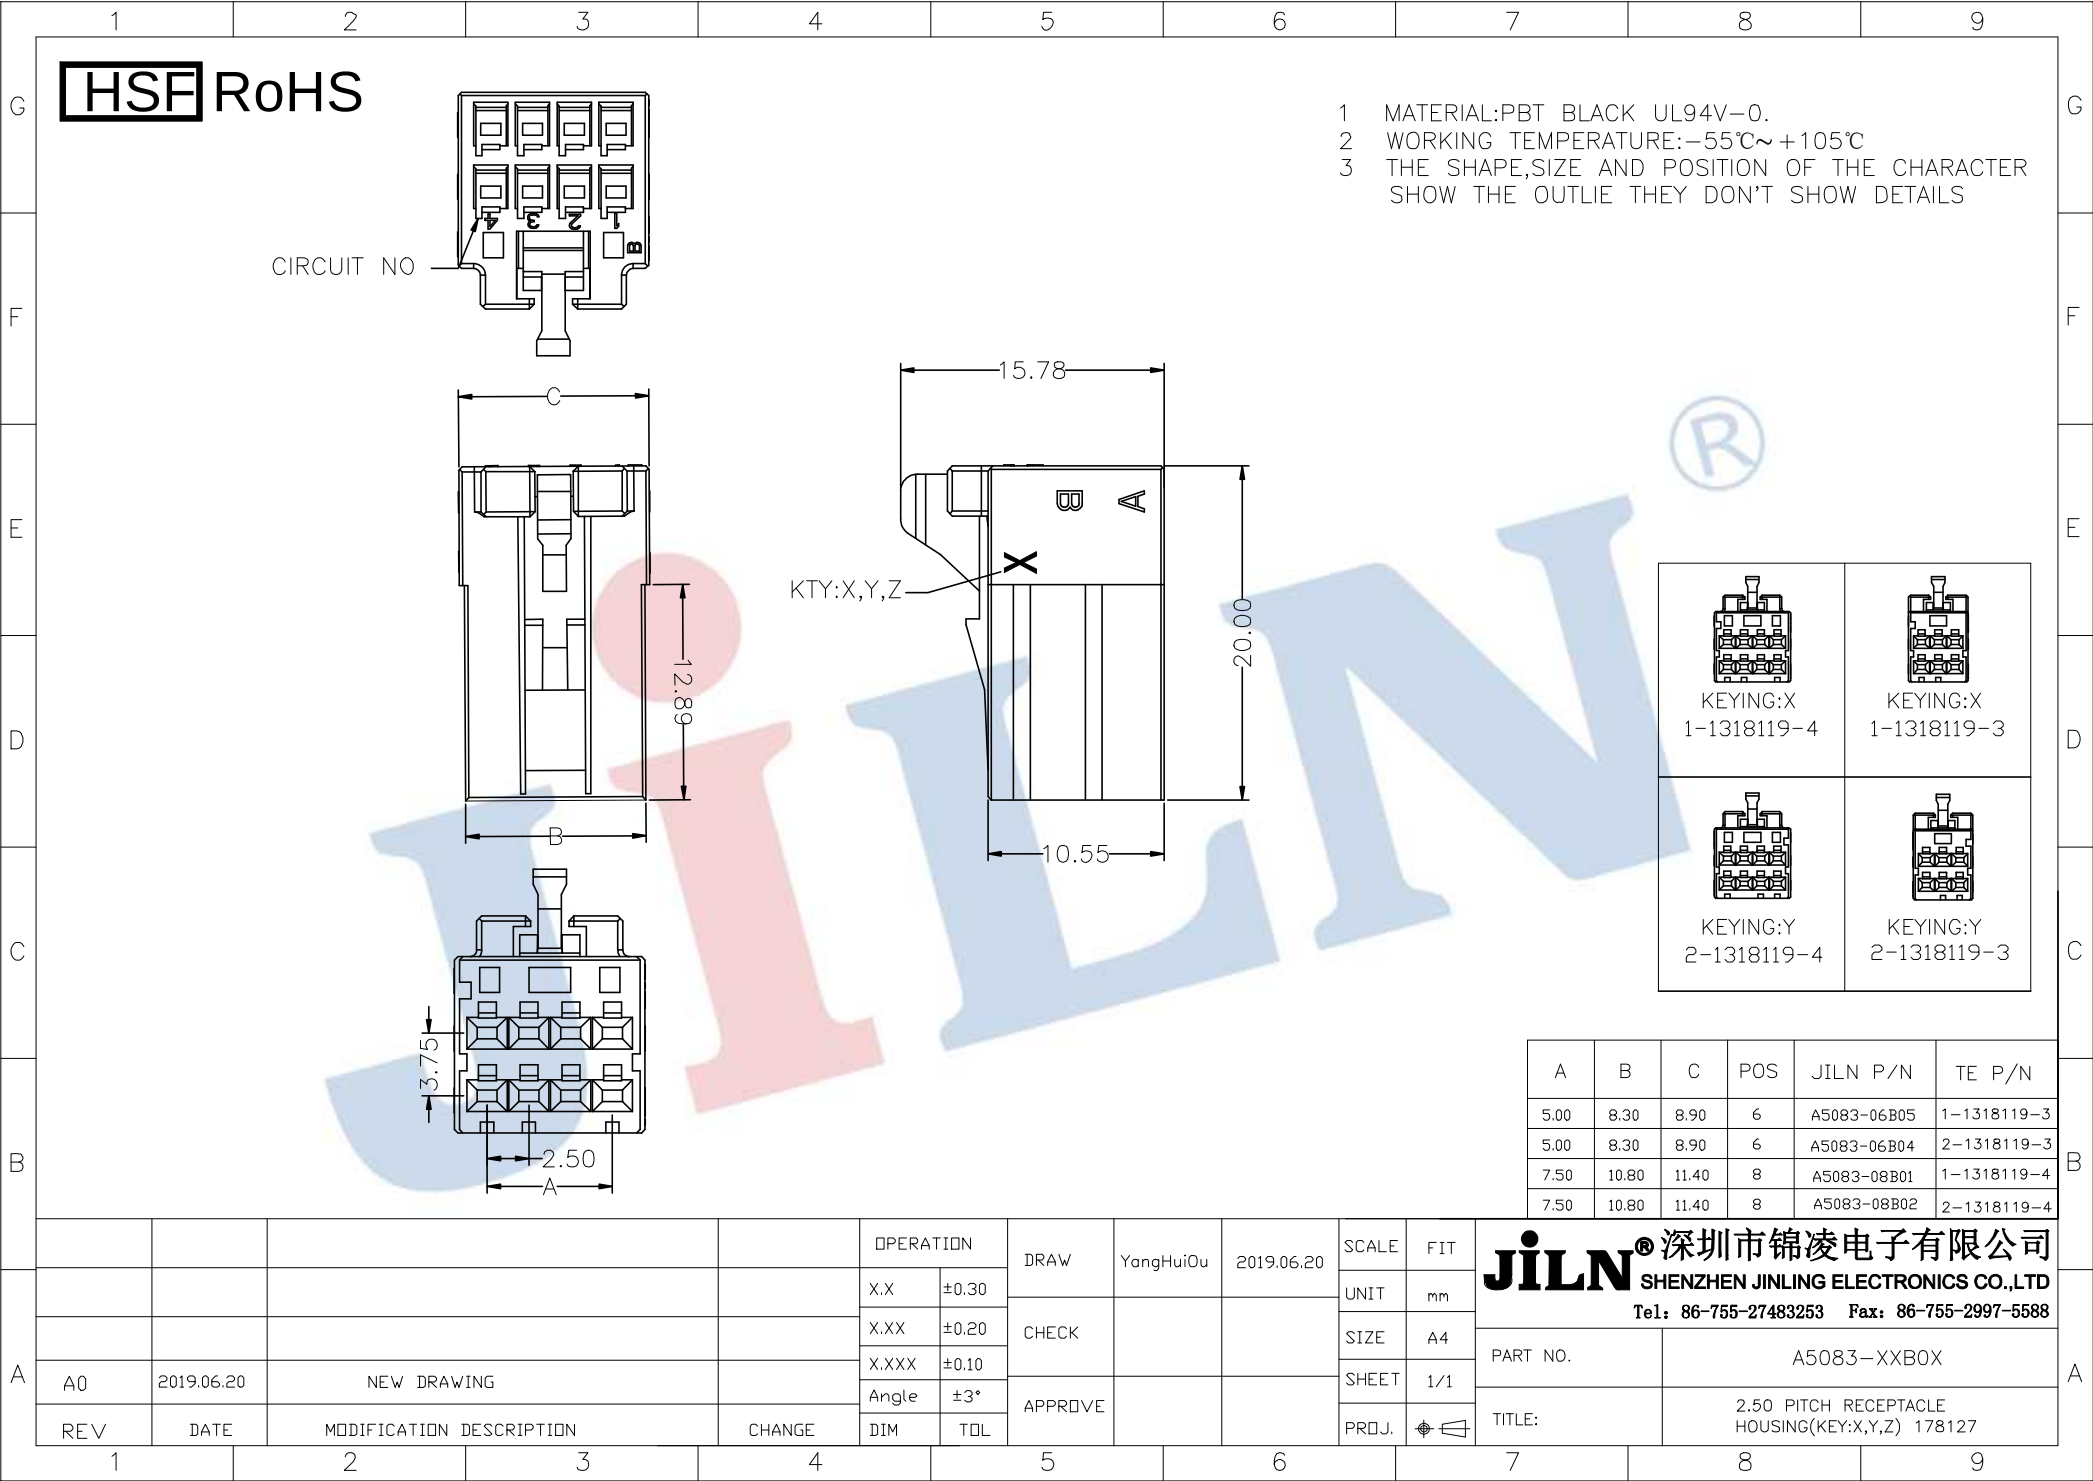


[illegible][illegible][illegible]

	1	2	3	4	5	6	7	8	9																														
G	HSE RoHS		 CIRCUIT NO →			1 MATERIAL:PBT BLACK UL94V-0. 2 WORKING TEMPERATURE:-55℃~+105℃ 3 THE SHAPE,SIZE AND POSITION OF THE CHARACTER SHOW THE OUTLIE THEY DON'T SHOW DETAILS			G																														
F									F																														
E			 KTY:X,Y,Z						E																														
D									D																														
C			 A						C																														
B						<table border="1"> <thead> <tr> <th>A</th><th>B</th><th>C</th><th>POS</th><th>JILN P/N</th><th>TE P/N</th></tr> </thead> <tbody> <tr><td>5.00</td><td>8.30</td><td>8.90</td><td>6</td><td>A5083-06B05</td><td>1-1318119-3</td></tr> <tr><td>5.00</td><td>8.30</td><td>8.90</td><td>6</td><td>A5083-06B04</td><td>2-1318119-3</td></tr> <tr><td>7.50</td><td>10.80</td><td>11.40</td><td>8</td><td>A5083-08B01</td><td>1-1318119-4</td></tr> <tr><td>7.50</td><td>10.80</td><td>11.40</td><td>8</td><td>A5083-08B02</td><td>2-1318119-4</td></tr> </tbody> </table>			A	B	C	POS	JILN P/N	TE P/N	5.00	8.30	8.90	6	A5083-06B05	1-1318119-3	5.00	8.30	8.90	6	A5083-06B04	2-1318119-3	7.50	10.80	11.40	8	A5083-08B01	1-1318119-4	7.50	10.80	11.40	8	A5083-08B02	2-1318119-4	B
A	B	C	POS	JILN P/N	TE P/N																																		
5.00	8.30	8.90	6	A5083-06B05	1-1318119-3																																		
5.00	8.30	8.90	6	A5083-06B04	2-1318119-3																																		
7.50	10.80	11.40	8	A5083-08B01	1-1318119-4																																		
7.50	10.80	11.40	8	A5083-08B02	2-1318119-4																																		
A	REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION	DRAW	YangHuiOu	2019.06.20	SCALE	FIT	JILN®深圳市锦凌电子有限公司																												
					X.X ±0.30				UNIT	mm	SHENZHEN JINLING ELECTRONICS CO.,LTD																												
					X.XX ±0.20	CHECK			SIZE	A4	Tel: 86-755-27483253 Fax: 86-755-2997-5588																												
	A0	2019.06.20	NEW DRAWING		X.XXX ±0.10				SHEET	1/1	PART NO.	A5083-XXBOX																											
					Angle ±3°	APPROVE			TITLE:		2.50 PITCH RECEPTACLE HOUSING(KEY:X,Y,Z) 178127																												
					DIM TOL				PRD.J.																														
	1	2	3	4	5	6	7	8	9																														

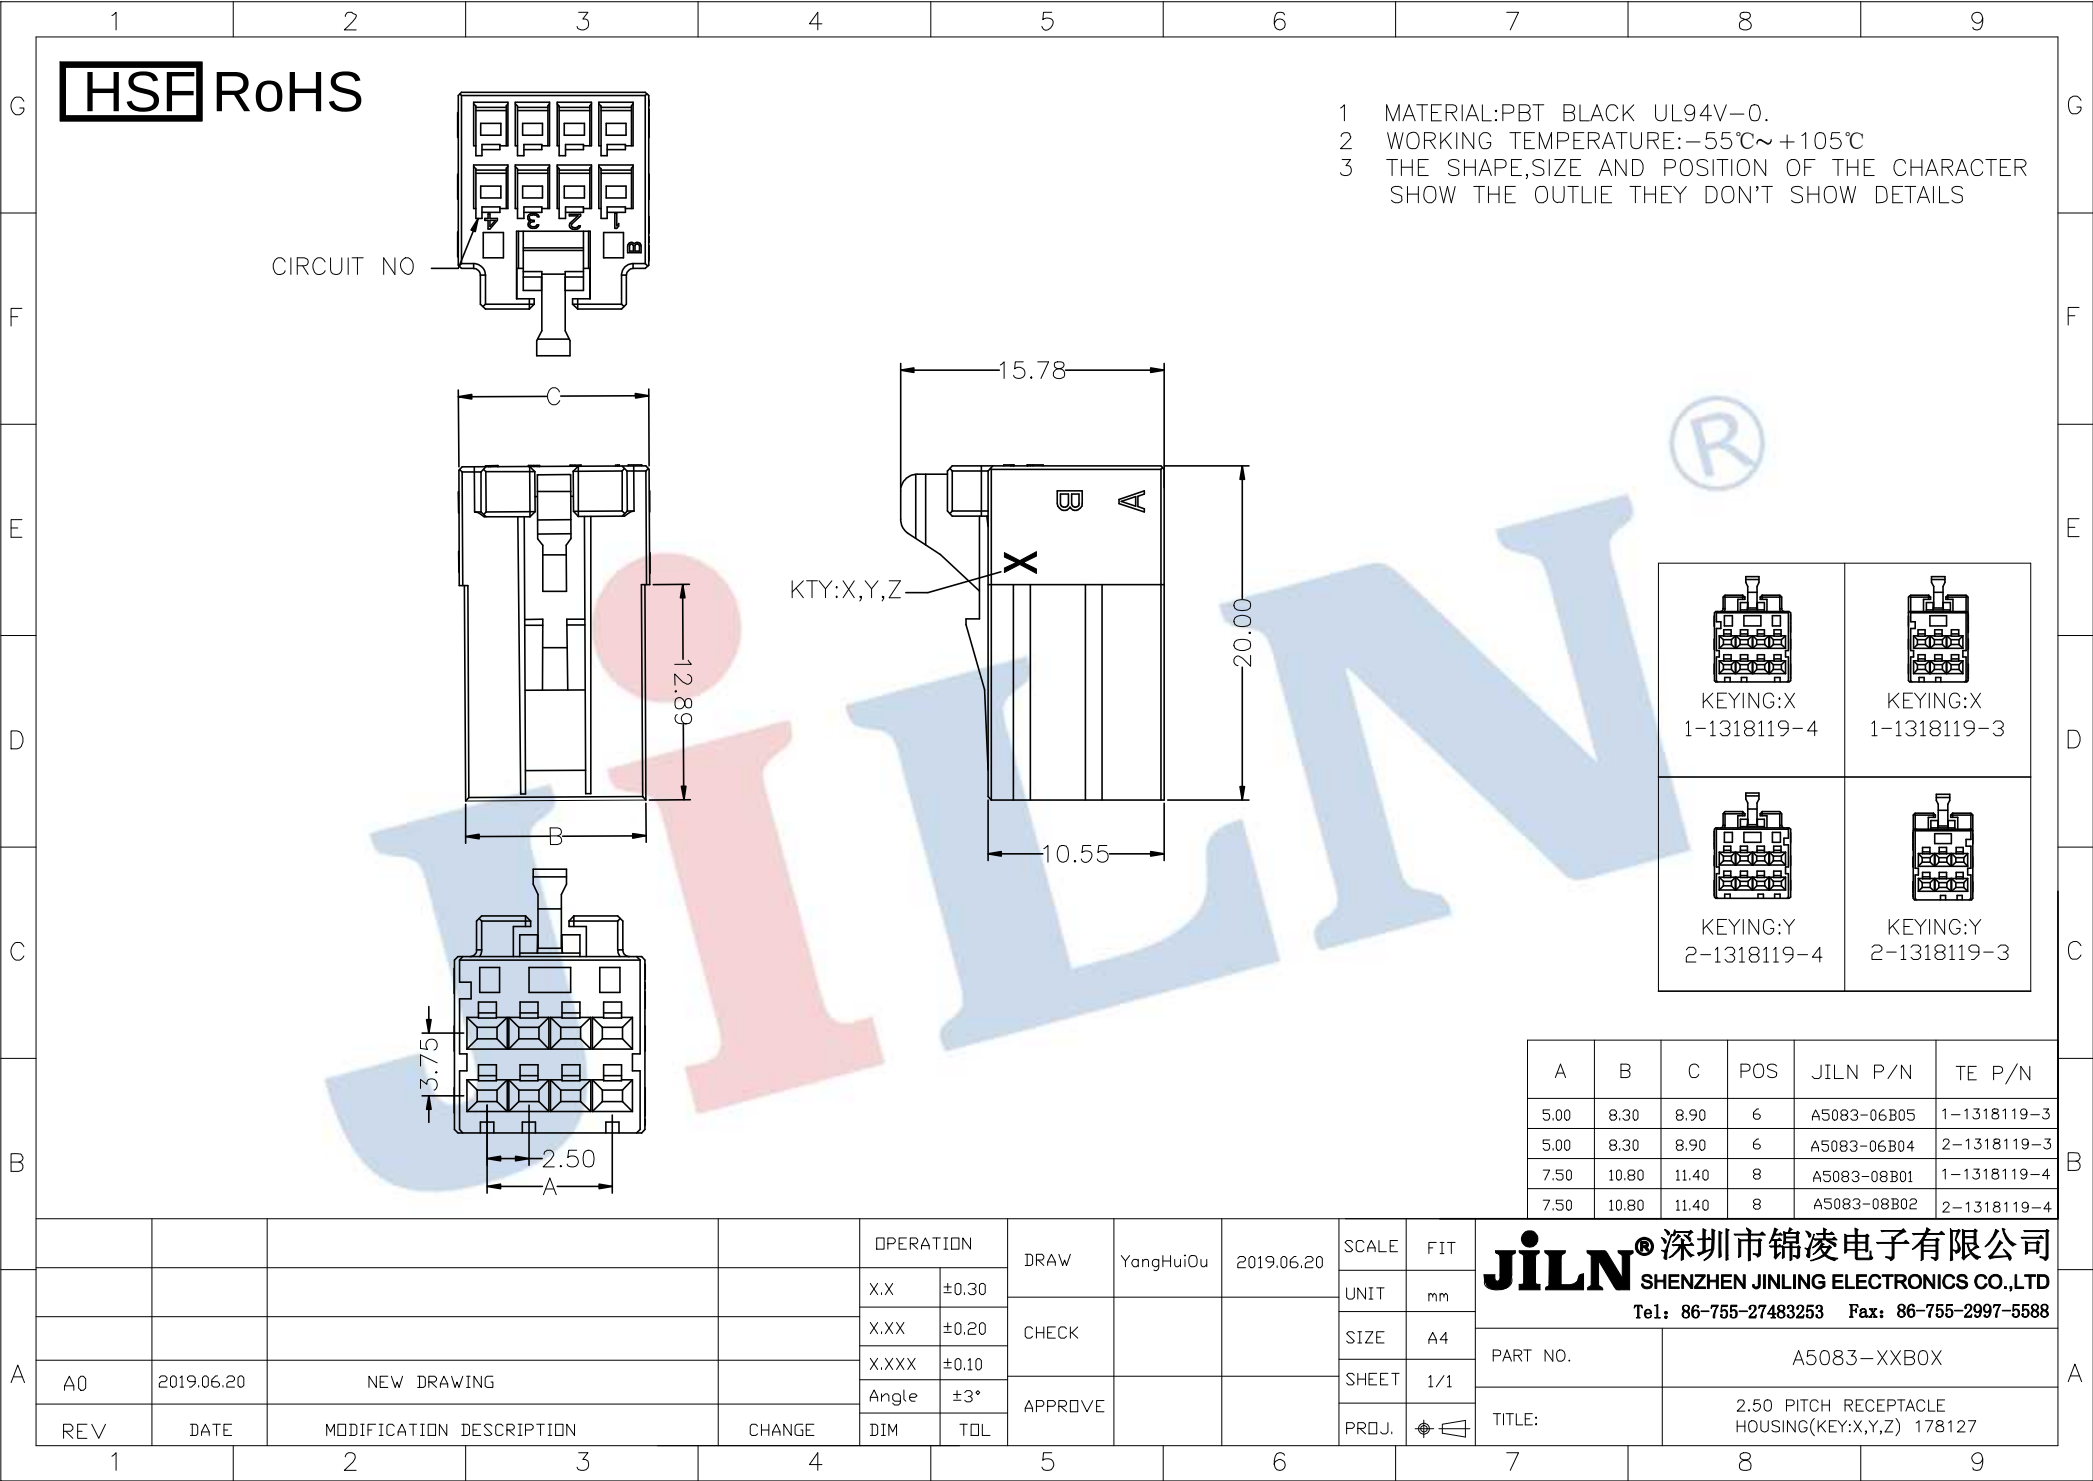

HSE RoHS

CIRCUIT NO

A

B

X

KTY:X,Y,Z

10.55

20.00

15.78

C

B

12.89

3.75

2.50

A

KEYING:X
1-1318119-4

KEYING:X
1-1318119-3

KEYING:Y
2-1318119-4

KEYING:Y
2-1318119-3

A	B	C	POS	JILN P/N	TE P/N
5.00	8.30	8.90	6	A5083-06B05	1-1318119-3
5.00	8.30	8.90	6	A5083-06B04	2-1318119-3
7.50	10.80	11.40	8	A5083-08B01	1-1318119-4
7.50	10.80	11.40	8	A5083-08B02	2-1318119-4

OPERATION

DRAW

YangHuiOu

2019.06.20

SCALE

FIT

UNITmm

SIZEA4

SHEET1 / 1

PROJ.

X.X±0.30

X.XX±0.20

X.XXX±0.10

Angle±3°

DIMTOL

CHECK

APPROVE

TITLE:

PART NO.A5083--XXBOX

2.50 PITCH RECEPTACLE HOUSING(KEY:X,Y,Z) 178127


MATERIAL:PBT BLACK UL94V-0.

WORKING TEMPERATURE:-55℃~+105℃

THE SHAPE,SIZE AND POSITION OF THE CHARACTER SHOW THE OUTLIE THEY DON'T SHOW DETAILS

JILN®深圳市锦凌电子有限公司SHENZHEN JINLING ELECTRONICS CO.,LTDTel: 86-755-27483253 Fax: 86-755-2997-5588

REVDATEMODIFICATION DESCRIPTIONCHANGE

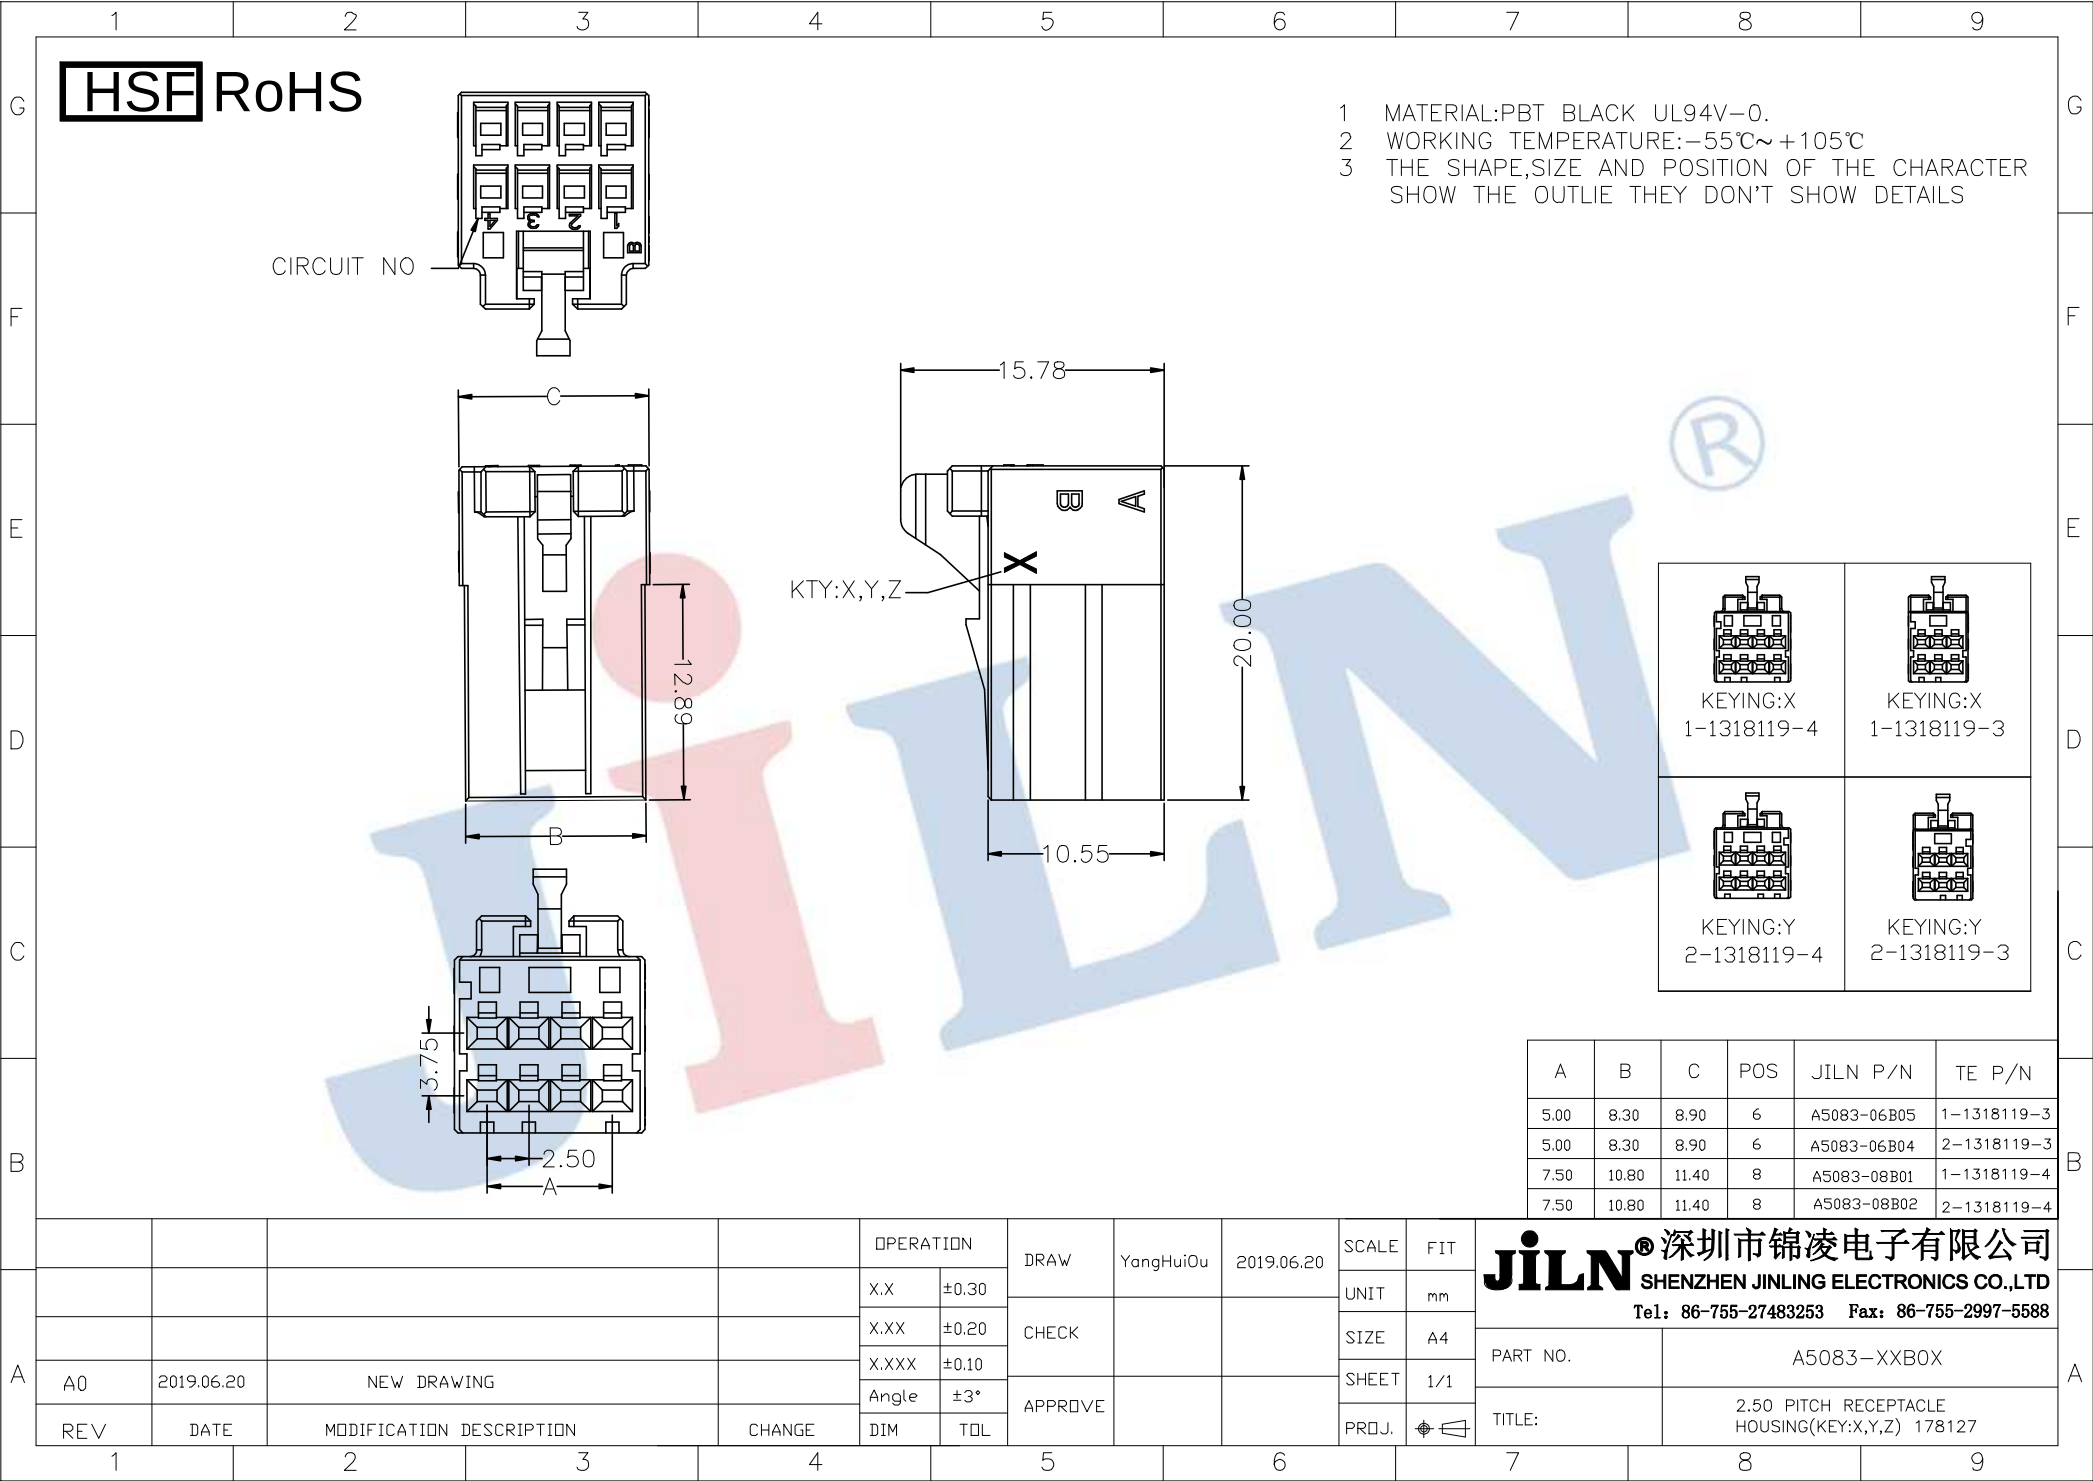[illegible]

</

[illegible]