

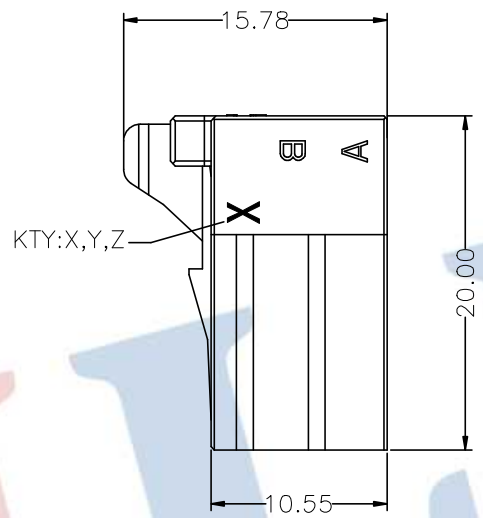
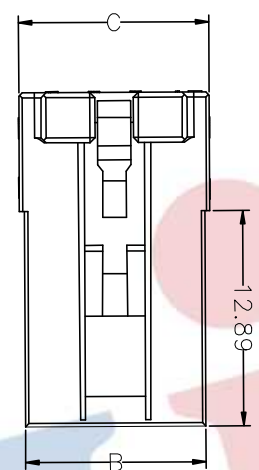
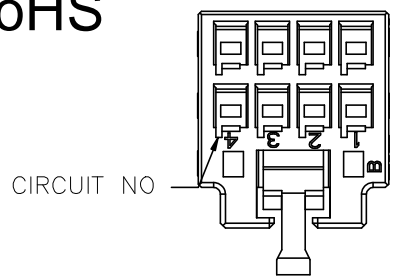





**HSF** RoHS




- 1 MATERIAL:PBT BLACK UL94V-0.
- 2 WORKING TEMPERATURE:-55°C~+105°C
- 3 THE SHAPE,SIZE AND POSITION OF THE CHARACTER SHOW THE OUTLIE THEY DON'T SHOW DETAILS

®

 KEYING:X 1-1318119-4	 KEYING:X 1-1318119-3
 KEYING:Y 2-1318119-4	 KEYING:Y 2-1318119-3

A	B	C	POS	JILN P/N	TE P/N
5.00	8.30	8.90	6	A5083-06B05	1-1318119-3
5.00	8.30	8.90	6	A5083-06B04	2-1318119-3
7.50	10.80	11.40	8	A5083-08B01	1-1318119-4
7.50	10.80	11.40	8	A5083-08B02	2-1318119-4

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION		DRAW	YangHuiOu	2019.06.20	SCALE	FIT
				X.X	±0.30					
A0	2019.06.20	NEW DRAWING		X.XX	±0.20	CHECK			UNIT	mm
				X.XXX	±0.10				SIZE	A4
				Angle	±3°	APPROVE			SHEET	1/1
				DIM	TOL				PROJ.	

**JILN**® 深圳市锦凌电子有限公司  
SHENZHEN JINLING ELECTRONICS CO.,LTD  
Tel: 86-755-27483253 Fax: 86-755-2997-5588

PART NO.	A5083-XXB0X
TITLE:	2.50 PITCH RECEPTACLE HOUSING(KEY:X,Y,Z) 178127

