



## SPECIFICATIONS

Rated Current:1.0AMP

Contact Resistance:20mΩ Max

Withstand Voltage:500V AC/DC

Insulation Resistance:1000MΩ Min

Operation Temperature:-40°C to +105°C

Contact Material:Brass

Contact Plating:Au or Sn Over Ni



Insulator Material:Polyester(UL94V-0)

Resistance To Soldering Heat:

245°C ±5°C, 10s(PBT insulator)

260°C ±5°C, 10s(PA6T&PA9T&LCP insulator)

Recommended P.C.B Layout(Top Side)  
(PCB BOARD TOLERANCE± 0.05)

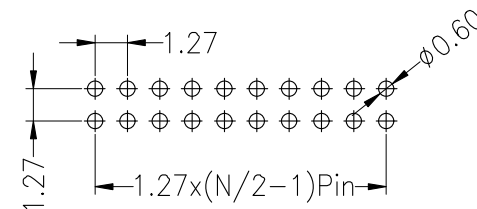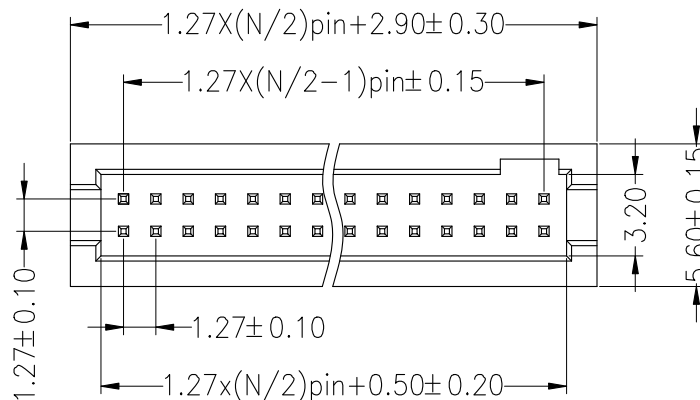

## Ordering Information



3232 XX S XX X B K00 X 0X

No. of Pins  
10-100P

Contact Plating  
G0:Gold Flash  
G1:1u" Gold  
G2:1.5u" Gold  
G3:2u" Gold  
G4:3u" Gold  
G5:5u" Gold  
G6:10u" Gold  
G7:15u" Gold  
G8:30u" Gold  
S0:Gold Flash/Tin  
SN:Tin

Insulator Material  
Option  
A=BK-PBT  
C=BK-PA6T  
E=BK-PA9T  
F=BK-LCP

Packing  
O=PE Bag  
A=Tray  
T=Tube  
P=Tube+Cap  
R=Reel+Cap

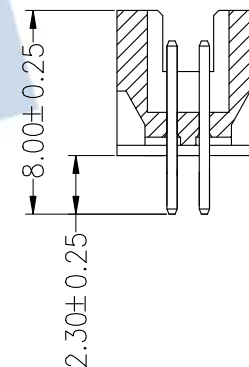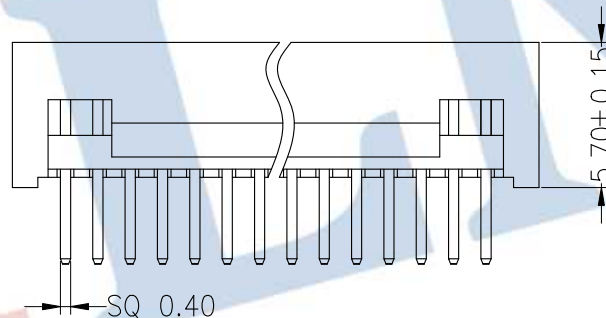

**JILN**® 深圳市锦凌电子有限公司  
SHENZHEN JINLING ELECTRONICS CO.,LTD  
Tel: 86-755-27483253 Fax: 86-755-2997-5588

PART NO. 3232XXSXXXBK00X0X

TITLE: 1.27Box Header Npin H5.7 180°

OPERATION

DRAW

yi yusheng

18.09.18

SCALE

FIT

X.X

±0.30

X.XX

±0.20

X.XXX

±0.10

Angle

±3°

DIM

TOL

APPROVE

UNIT

mm

SIZE

A4

SHEET

1/1

PROJ.

1

TITLE:



1.27Box Header Npin H5.7 180°

No. of Pins  
10-100P

Contact Plating  
G0:Gold Flash  
G1:1u" Gold  
G2:1.5u" Gold  
G3:2u" Gold  
G4:3u" Gold  
G5:5u" Gold  
G6:10u" Gold  
G7:15u" Gold  
G8:30u" Gold  
S0:Gold Flash/Tin  
SN:Tin

Insulator Material  
Option  
A=BK-PBT  
C=BK-PA6T  
E=BK-PA9T  
F=BK-LCP

Packing  
O=PE Bag  
A=Tray  
T=Tube  
P=Tube+Cap  
R=Reel+Cap

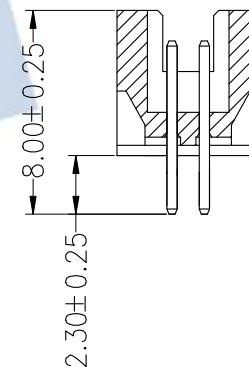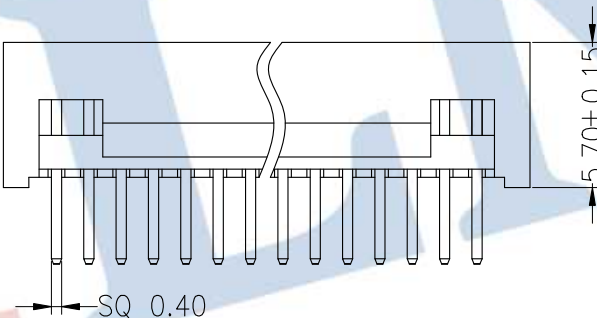

**JILN**® 深圳市锦凌电子有限公司  
SHENZHEN JINLING ELECTRONICS CO.,LTD  
Tel: 86-755-27483253 Fax: 86-755-2997-5588

PART NO. 3232XXSXXXBK00X0X

TITLE: 1.27Box Header Npin H5.7 180°

OPERATION

DRAW

yi yusheng

18.09.18

SCALE

FIT

X.X

±0.30

X.XX

±0.20

X.XXX

±0.10

Angle

±3°

DIM

TOL

APPROVE

UNIT

mm

SIZE

A4

SHEET

1/1

PROJ.

1

TITLE:

1.27Box Header Npin H5.7 180°