

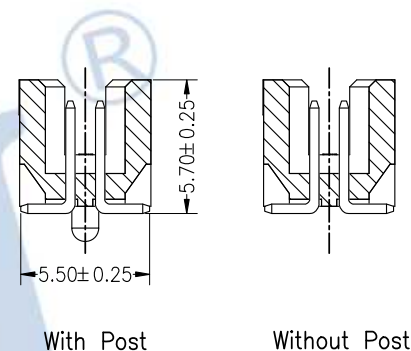


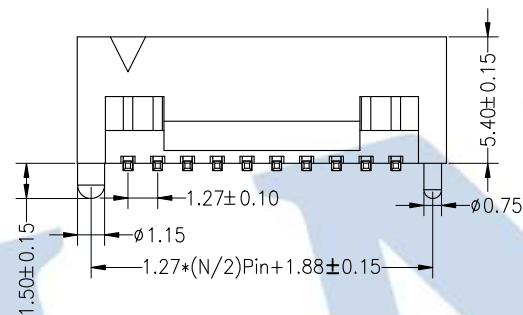

SPECIFICATIONS

Rated Current:1.0AMP
 Contact Resistance:20mΩ Max
 Withstand Voltage:500V AC/DC
 Insulation Resistance:1000MΩ Min
 Operation Temperature:-40°C to +105°C


Contact Material:Brass
 Contact Plating:Au or Sn Over Ni
 Insulator Material:Polyester(UL94V-0)
 Max.Processing Temp:
 (PA6T/LCP/PA9T)260°C±5°C For 5~10 Second

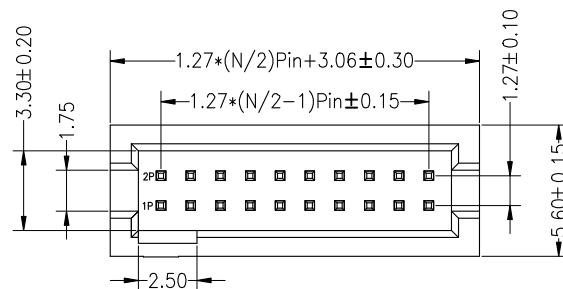

Ordering Information

3231 XX M XX X B K00 X XX

- No. of Pins
NPin
N=10~100
- Contact Plating
G0:Gold Flash
G1:1u" Gold
G2:1.5u" Gold
G3:2u" Gold
G4:3u" Gold
G5:5u" Gold
G6:10u" Gold
G7:15u" Gold
G8:30u" Gold
S0:Gold Flash/Tin
SN:Tin
- Insulator Material
Option
C=BK-PA6T
E=BK-PA9T
F=BK-LCP
- Packing
O=PE Bag
A=Tray
T=Tube
P=Tube+Cap
- Stream Code
01~99

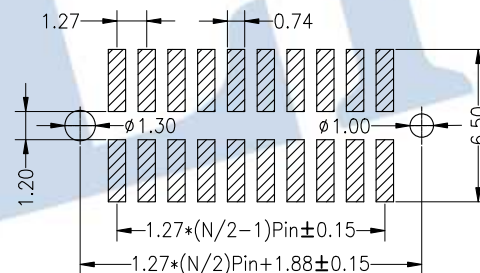

Recommended P.C.B Layout(Top Side)
 (PCB BOARD TOLERANCE±0.05)

				OPERATION		DRAW	Jelly Feng	2023.05.13	SCALE	FIT	JILN ® 深圳市锦凌电子有限公司 SHENZHEN JINLING ELECTRONICS CO.,LTD Tel: 86-755-27483253 Fax: 86-755-2997-5588	
				X.X	±0.30				UNIT	mm		
				X.XX	±0.20	CHECK	SIZE	A4				
				X.XXX	±0.10	APPROVE	SHEET	1/1				
A0	2023.05.13	NEW DRAWING		Angle	±3°			PROJ.	⌀	PART NO.	3231XXMXXXBK00XXX	
REV	DATE	MODIFICATION DESCRIPTION		DIM	TOL					TITLE:	1.27Box Header Npin H5.4 SMT	