





SPECIFICATIONS

Rated Current:1.0AMP
 Contact Resistance:20mΩ Max
 Withstand Voltage:500V AC/DC
 Insulation Resistance:1000MΩ Min
 Operation Temperature:-40°c to +105°c

Contact Material:Brass
 Contact Plating:Au or Sn Over Ni
 Insulator Material:Polyester(UL94V-0)
 Resistance To Soldering Heat:
 260° C±5° C, 10s(PA6T&PA9T&LCP insulator)



Recommended P.C.B Layout(Top Side)
 (PCB BOARD TOLERANCE±0.05)

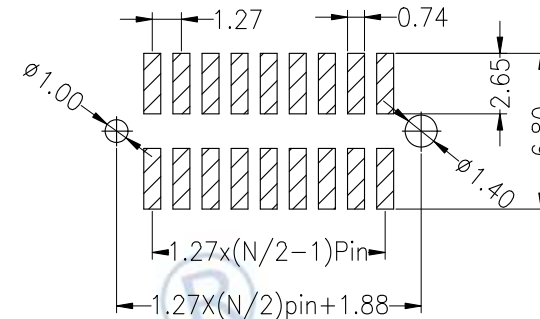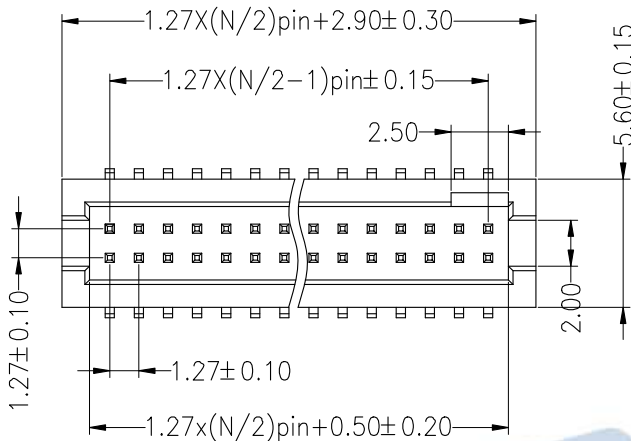

Ordering Information

3232 XX M XX X B K00 X 0X

- No.of Pins: 10-100P
- Contact Plating: G0:Gold Flash, G1:1u" Gold, G2:1.5u" Gold, G3:2u" Gold, G4:3u" Gold, G5:5u" Gold, G6:10u" Gold, G7:15u" Gold, G8:30u" Gold, S0:Gold Flash/Tin, SN:Tin
- Insulator Material Option: C=BK-PA6T, E=BK-PA9T, F=BK-LCP
- Packing: 0=PE Bag, A=Tray, T=Tube, R=Reel+Cap, P=Tube+Cap

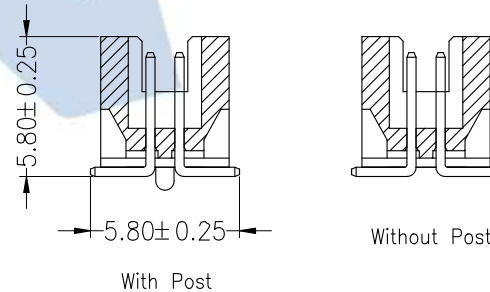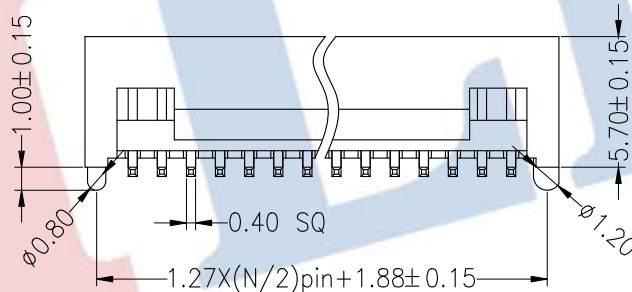

| | | | | | | | | | | |
|-----|------------|--------------------------|--|-----------|-------|---------|-----------|----------|----------|------------------|
| | | | | OPERATION | | DRAW | yiyusheng | 18.09.18 | SCALE | FIT |
| | | | | X.X | ±0.30 | | | | UNIT | mm |
| | | | | | | CHECK | | | SIZE | A4 |
| | | | | X.XX | ±0.20 | | | | SHEET | 1/1 |
| A0 | 2018.09.18 | NEW DRAWING | | | | APPROVE | | | PART NO. | 3232XXMXXBK00X0X |
| REV | DATE | MODIFICATION DESCRIPTION | | CHANGE | DIM | | | | TOL | TITLE: |

JILN 深圳市锦凌电子有限公司
 SHENZHEN JINLING ELECTRONICS CO.,LTD
 Tel: 86-755-27483523 Fax: 86-755-2997-5588