



SPECIFICATIONS

Rated Current:1.0AMP

Contact Resistance:30mΩ Max

Withstand Voltage:500V AC/DC

Insulation Resistance:1000MΩ Min

Operation Temperature:-40℃ to +105℃





Contact Material:Brass

Contact Plating:Au or Sn Over Ni

Insulator Material:Polyester(UL94V-0)

Resistance To Soldering Heat:

260℃±5℃, 10s(LCP insulator)

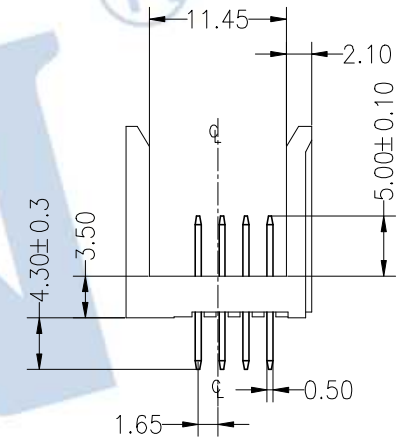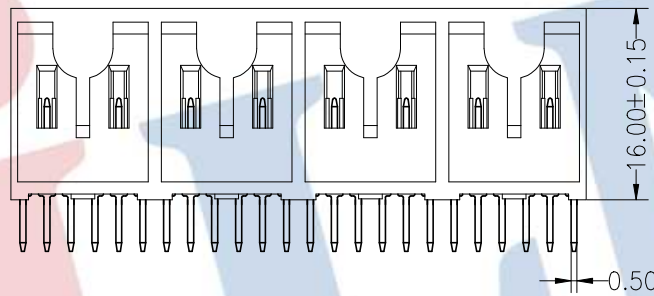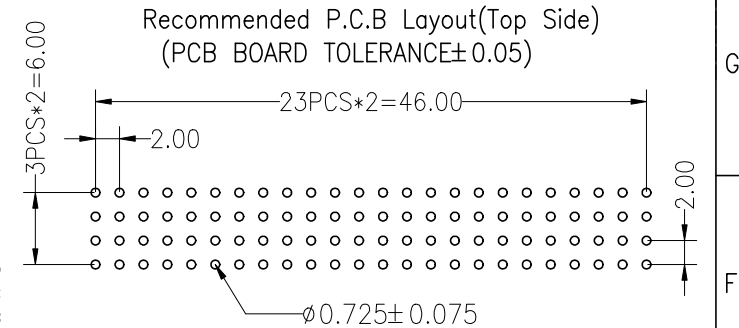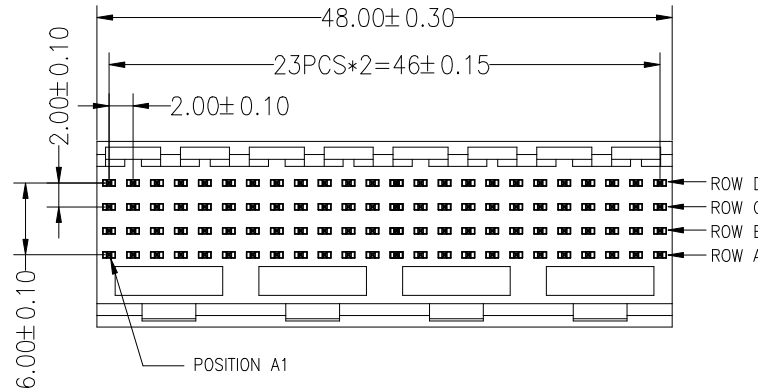

Ordering Information

3510 4 96 A M S XX NN X X

No.of Pins 96P	Contact Type F:Female M:Male	Contact Plating G0:Gold Flash S0:Gold Flash/Tin S1:2U" Gold/Tin S2:5U" Gold/Tin S3:10U" Gold/Tin S4:15U" Gold/Tin S5:30U" Gold/Tin SN:Tin	Packing A:Tray T:Tube
-------------------	------------------------------------	---	-----------------------------

				OPERATION		DRAW	YiYuSheng	19.04.10	SCALE	FIT	JILN® 深圳市锦凌电子有限公司 SHENZHEN JINLING ELECTRONICS CO.,LTD Tel: 86-755-27483253 Fax: 86-755-2997-5588	
				X.X	±0.30				CHECK			
				X.XX	±0.20	APPROVE						
A0	2019.04.10	NEW DRAWING		X.XXX	±0.10				Angle	± 3°		
REV	DATE	MODIFICATION DESCRIPTION		CHANGE	DIM	TOL	PROJ.				TITLE:	FUTURE BUS,4*24 Male 180°
1	2	3	4	5		6	7		8	9		