



SPECIFICATIONS

Rated Current:1.0AMP

Contact Resistance:30mΩ Max

Withstand Voltage:500V AC/DC

Insulation Resistance:1000MΩ Min

Operation Temperature:-40°C to +105°C

Contact Material:Phosphor bronze

Contact Plating:Au or Sn Over Ni

Insulator Material:Polyester(UL94V-0)

Resistance To Soldering Heat:

260° C±5° C, 10s(LCP insulator)

Ordering Information


3510 5 60 A F R XX BW X X

No.of Pins
5X12P

Contact Type
F:Female
M:Male

Contact Plating
G0:Gold Flash
S0:Gold Flash/Tin
S1:2U" Gold/Tin
S2:5U" Gold/Tin
S3:10U" Gold/Tin
S4:15U" Gold/Tin
S5:30U" Gold/Tin
SN:Tin

Packing
A:Tray
T:Tube

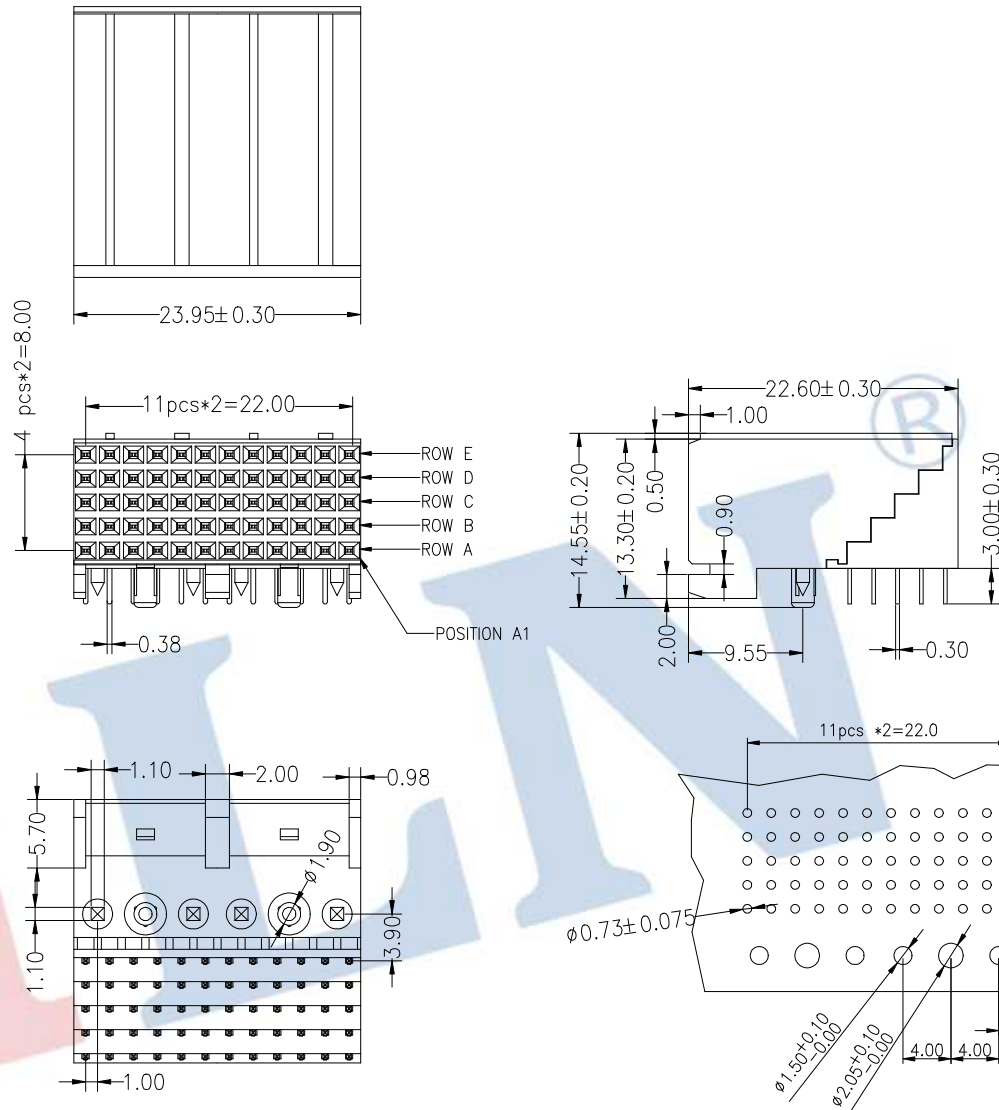

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

				OPERATION		DRAW	YiYuSheng	19.10.09	SCALE	FIT	JiLN® 深圳市锦凌电子有限公司 SHENZHEN JINLING ELECTRONICS CO.,LTD Tel: 86-755-27483253 Fax: 86-755-2997-5588		
				X.X	±0.30				UNIT	mm			
				X.XX	±0.20	SIZE	A4						
				X.XXX	±0.10	CHECK			SHEET	1/1	PART NO.	3510560AFRXXBWXX	
A0	2019.10.09	NEW DRAWING		Angle	±3°								
REV	DATE	MODIFICATION DESCRIPTION		CHANGE	DIM	TOL	APPROVE			PROJ.		TITLE:	FUTURE BUS,5*12 Female 90°