
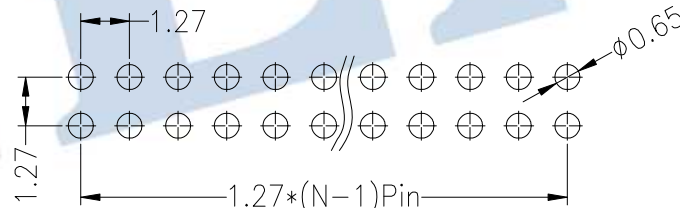
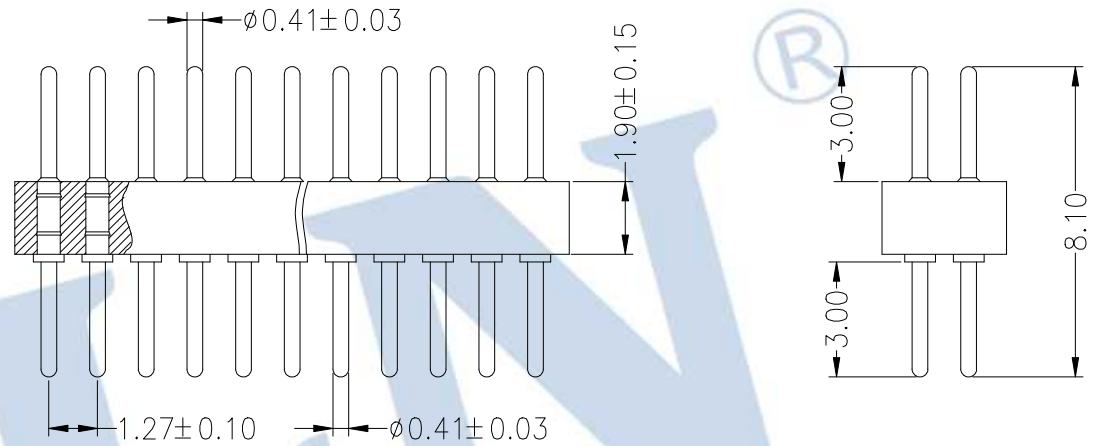


**HSF** RoHS

**SPECIFICATIONS**

Current Rating:1.0AMP  
 Contact Resistance:10mΩ Max  
 Dielectric Strength:Min 1000V RMS  
 Operation Temperature:-40°C to +105°C

Contact Material:Brass  
 Contact Plating:Au Over Ni  
 Insulator Material:Polyester(UL94V-0)  
 Standard: PPS  
 Max.Processing Temp:260°C±5°C For 5~10 Second

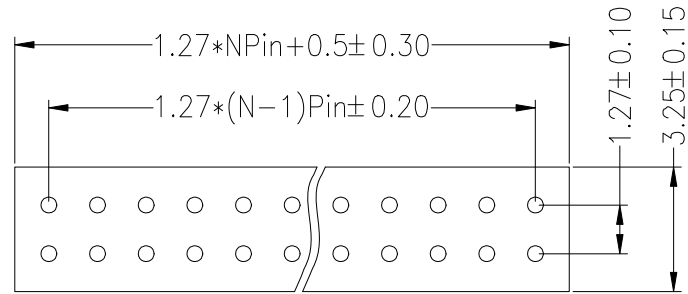

Recommended P.C.B Layout(Top Side)  
 (PCB BOARD TOLERANCE± 0.05)

**Ordering Information**

**3614 19 2 XX S XX 081 X XX**

No. of Pins Per Row NPin N=02~50  
 Contact Plating G1:1U" Gold G2:1.5U" Gold G3:2U" Gold G4:3U" Gold G5:5U" Gold S0:Gold Flash/Tin SN:Tin  
 Length 081=8.1mm  
 Packing 0=PE Bag A=Tray T=Tube  
 Code Stream

				OPERATION		DRAW	Jelly Feng	2023.07.12	SCALE	FIT	<b>JILN</b> ® 深圳市锦凌电子有限公司 SHENZHEN JINLING ELECTRONICS CO.,LTD Tel: 86-755-27483253 Fax: 86-755-2997-5588	
				X.X	±0.30				UNIT	mm		
				X.XX	±0.20	CHECK	SIZE	A4				
				X.XXX	±0.10	APPROVE		SHEET	1/1	PART NO.	34192XXSXX081XXX	
A0	2023.07.12	NEW DRAWING		Angle	±3°				PROJ.	☐	TITLE:	1.27x1.9 双头针 双排180° L=8.1
REV	DATE	MODIFICATION DESCRIPTION		CHANGE	DIM	TOL						