

G


HSF RoHS

SPECIFICATIONS
Current Rating:2.0AMP
Contact Resistance:20mΩ Max
Dielectric Strength:Min 1000V RMS
Operation Temperature:-40°c to +105°c

F


Contact Material:Brass
Contact Plating:Au Over Ni
Insulator Material:Polyester(UL94V-0)
Standard: PPS
Soldering Temperature:260°C±5°C For 5~10 Second

E

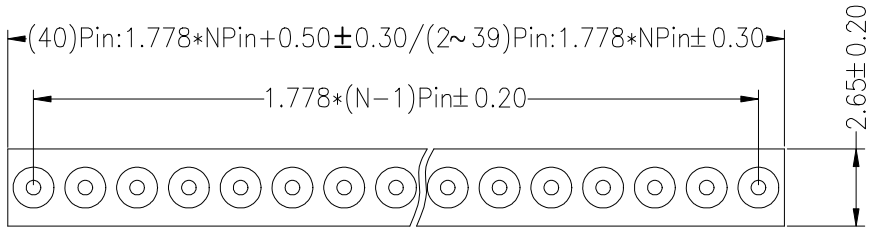


G

D

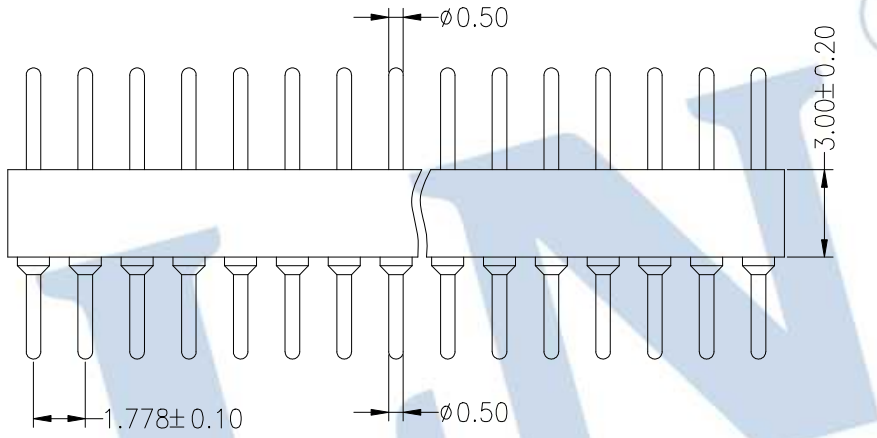

F

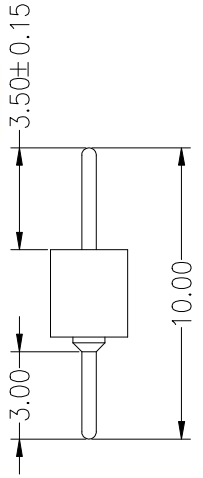

E

C

Ordering Information

3613 30 1 XX S XX 100 XX

No.of Pins
NPin
N=02~40

Contact Plating
G1:Gold Flash
G3:2U" Gold
G4:3U" Gold
G5:5U" Gold
G6:10U" Gold
G7:15U" Gold

Length
100=10.0mm

Stream code

D

B

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

C

A

				OPERATION		DRAW	Jelly Feng	2023.07.11	SCALE	FIT	JILN®深圳市锦凌电子有限公司 SHENZHEN JINLING ELECTRONICS CO.,LTD Tel: 86-755-27483253 Fax: 86-755-2997-5588	
				X.X	±0.30				UNIT	mm		
				X.XX	±0.20	CHECK			SIZE	A4		
				X.XXX	±0.10		SHEET	1/1	PART NO.	3613301XXSXX100XX		
A0	2023.07.11	NEW DRAWING		Angle	±3°	APPROVE			PROJ.		TITLE:	1.778x3.0 双头针 单排180° L=10.0
REV	DATE	MODIFICATION DESCRIPTION		CHANGE	DIM		TOL					

B

A