
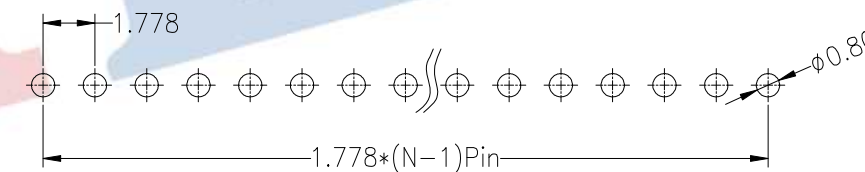
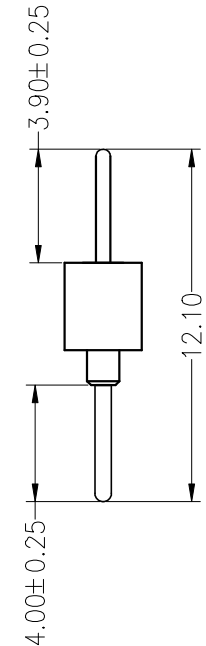
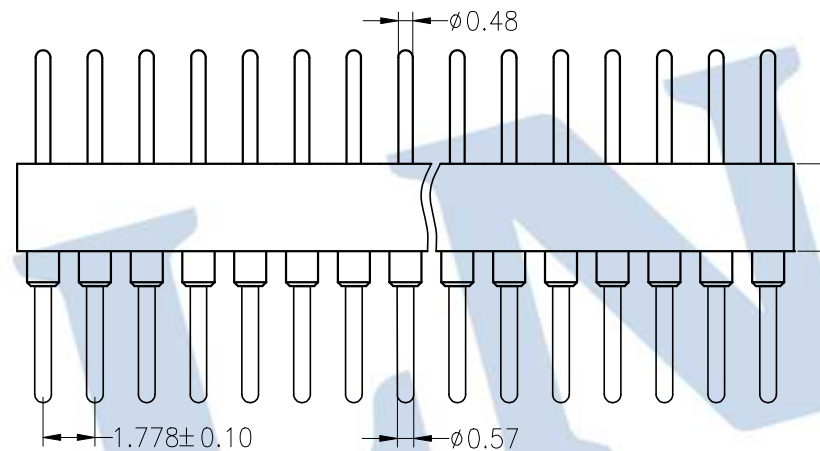


HSF RoHS

SPECIFICATIONS

Current Rating:2.0AMP
 Contact Resistance:20mΩ Max
 Dielectric Strength:Min 1000V RMS
 Operation Temperature:-40°C to +105°C

Contact Material:Brass
 Contact Plating:Au Over Ni
 Insulator Material:Polyester(UL94V-0)
 Standard: PPS
 Soldering Temperature:260°C±5°C For 5~10 Second

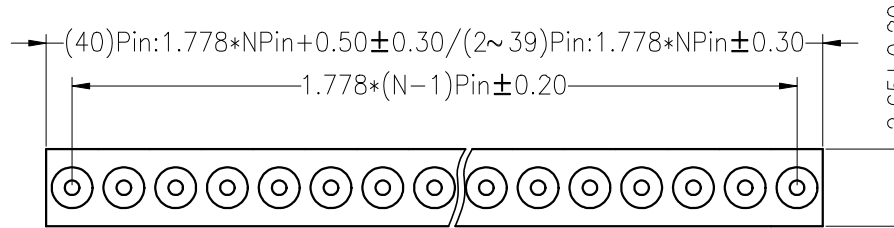

Recommended P.C.B Layout(Top Side)
 (PCB BOARD TOLERANCE±0.05)

Ordering Information

3613 30 1 XX S XX 121 XX

No.of Pins
 NPin
 N=02~40

Contact Plating
 G1:Gold Flash
 G3:2U" Gold
 G4:3U" Gold
 G5:5U" Gold
 G6:10U" Gold
 G7:15U" Gold

Length
 121=12.1mm

Stream code

				OPERATION		DRAW	Jelly Feng	2023.07.11	SCALE	FIT	JILN ® 深圳市锦凌电子有限公司 SHENZHEN JINLING ELECTRONICS CO.,LTD Tel: 86-755-27483253 Fax: 86-755-2997-5588		
				X.X	±0.30				UNIT	mm			
				X.XX	±0.20	CHECK		SIZE	A4	PART NO.			3613301XXSXX121XX
A0	2023.07.11	NEW DRAWING		X.XXX	±0.10	APPROVE			SHEET	1/1	TITLE:		1.778x3.0 双头针 单排180° L=12.1
REV	DATE	MODIFICATION DESCRIPTION		CHANGE	DIM				TOL	PROJ.	☐		