



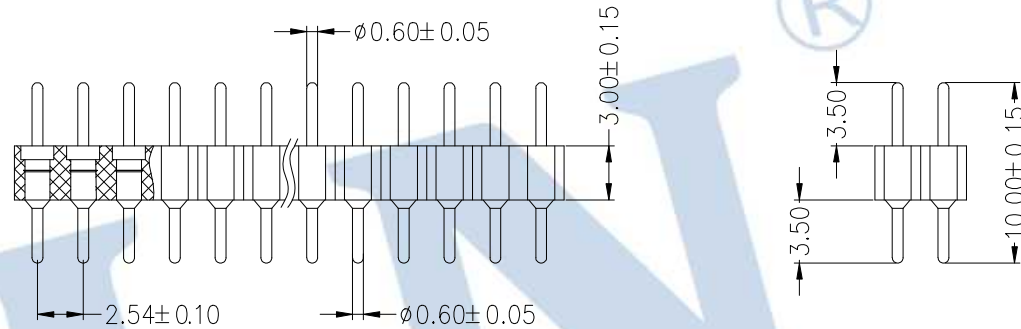

**SPECIFICATIONS**

Current Rating:3.0AMP  
 Contact Resistance:10mΩ Max  
 Dielectric Strength:Min 1000V AC RMS  
 Operation Temperature:-40°C to +105°C


Contact Material:Brass  
 Contact Plating:Au Over Ni  
 Insulator Material:Polyester(UL94V-0)  
 Standard: PPS  
 Soldering Temperature:260°C±5°C For 5~10 Second

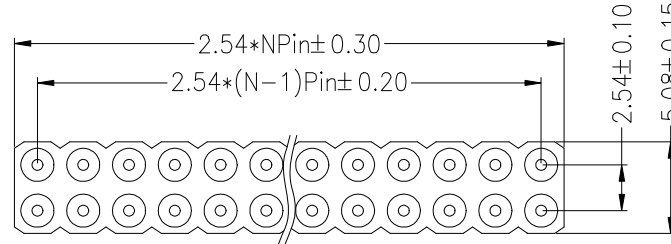

**Ordering Information**

**3610 30 2 XX S XX 100 XX**

No. of Pins Per Row NPin N=02~40  
 Contact Plating  
 G1:1U" Gold  
 G2:1.5U" Gold  
 G3:2U" Gold  
 G4:3U" Gold  
 G5:5U" Gold  
 S0:Gold Flash/Tin  
 SN:Tin  
 Length 100=10.0mm  
 Stream Code

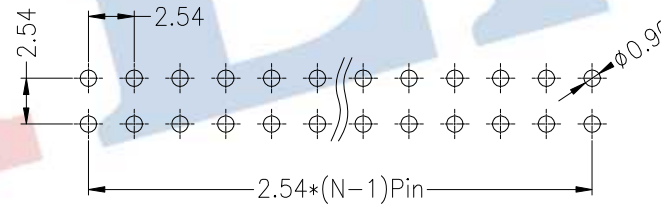

Recommended P.C.B Layout(Top Side)  
 (PCB BOARD TOLERANCE±0.05)

				OPERATION		DRAW	Wei Chen	2021.12.01	SCALE	FIT	<b>JILN</b> ® 深圳市锦凌电子有限公司 SHENZHEN JINLING ELECTRONICS CO.,LTD Tel: 86-755-27483253 Fax: 86-755-2997-5588	
				X.X	±0.30				UNIT	mm		
				X.XX	±0.20	CHECK			SIZE	A4	PART NO. 3610302XXSXX100XX	
				X.XXX	±0.10				SHEET	1/1		
A0	2021.12.01	NEW DRAWING		Angle	±3°	APPROVE			PROJ.	◆ ▽	TITLE:	2.54x3.0 双排双头针 L=10.0 针尖0.60
REV	DATE	MODIFICATION DESCRIPTION		DIM	TOL							