



SPECIFICATIONS

Current Rating:3.0AMP

Contact Resistance:10mΩ Max

Dielectric Strength:Min 1000V AC RMS

Operation Temperature:-40°C to +105°C




Contact Material:Brass

Contact Plating:Au Over Ni

Insulator Material:Polyester(UL94V-0)

Standard: PPS

Soldering Temperature:260°C±5°C For 5~10 Second

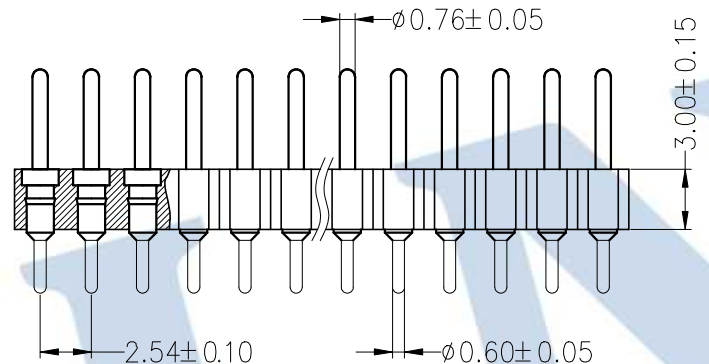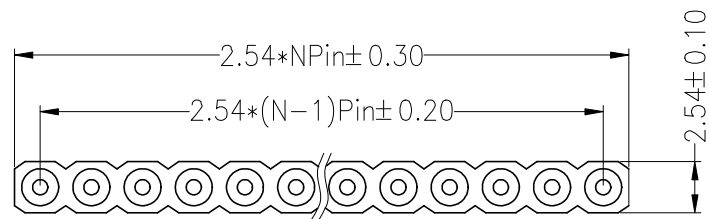

Ordering Information


3610 30 1 XX S XX 111 XX

No. of Pins
NPIN
N=02~40

Contact Plating
G1:1U" Gold
G2:1.5U" Gold
G3:2U" Gold
G4:3U" Gold
G5:5U" Gold
S0:Gold Flash/Tin
SN:Tin

Pin Length
111=11.1mm

Stream code

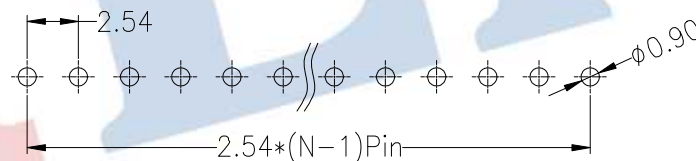

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

				OPERATION		DRAW	Wei Chen	2019.10.15	SCALE	FIT	JILN ® 深圳市锦凌电子有限公司 SHENZHEN JINLING ELECTRONICS CO.,LTD Tel: 86-755-27483253 Fax: 86-755-2997-5588	
				X.X	±0.30				UNIT	mm		
				X.XX	±0.20	CHECK			SIZE	A4	PART NO.	3610301XXSXX111XX
				X.XXX	±0.10				SHEET	1/1		
A0		2019.10.15	NEW DRAWING	Angle	±3°	APPROVE			PROJ.	1/1	TITLE:	2.54x3.0 单排双头针 L=11.1 上针尖0.76 下针尖0.60
REV	DATE	MODIFICATION DESCRIPTION		DIM	TOL							