

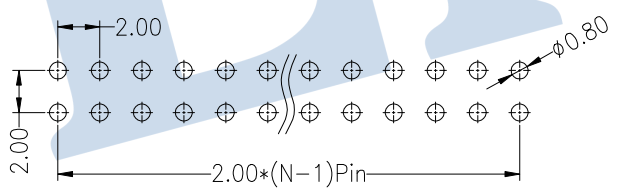


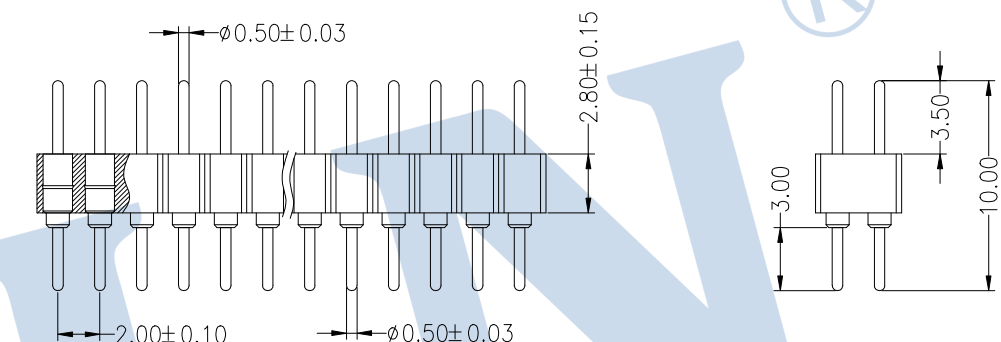

**SPECIFICATIONS**

Current Rating:3.0AMP  
 Contact Resistance:10mΩ Max  
 Dielectric Strength:Min 1000V RMS  
 Operation Temperature:-40°C to +105°C

Contact Material:Brass  
 Contact Plating:Au Over Ni  
 Insulator Material:Polyester(UL94V-0)  
 Standard: PPS  
 Soldering Temperature:260°C±5°C For 5~10 Second

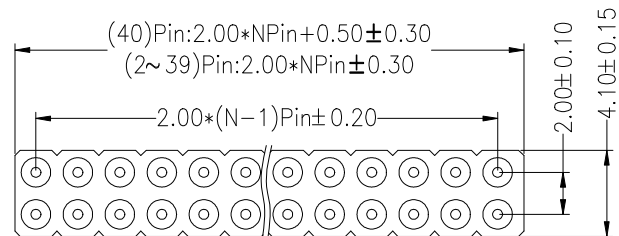

Recommended P.C.B Layout(Top Side)  
 (PCB BOARD TOLERANCE±0.05)

**Ordering Information**

**3612 28 2 XX S XX 100 XX**

No.of Pins Per Row 02-40P  
 Contact G1:1U" SN:Tin  
 Plating Gold  
 Length 100=10.0mm  
 Code Stream

				OPERATION		DRAW	Jelly Feng	2023.07.11	SCALE	FIT	<b>JILN</b> ® 深圳市锦凌电子有限公司 SHENZHEN JINLING ELECTRONICS CO.,LTD Tel: 86-755-27483253 Fax: 86-755-2997-5588	
				X.X	±0.30				UNIT	mm		
				X.XX	±0.20	CHECK			SIZE	A4	PART NO. 3612282XXSX100XX	
				X.XXX	±0.10				SHEET	1/1		
A0	2023.07.11	NEW DRAWING		Angle	±3°	APPROVE			PROJ.		TITLE:	2.0x3.0 双头针 双排180° L=10.0
REV	DATE	MODIFICATION DESCRIPTION		DIM	TOL							