







SPECIFICATIONS

Current Rating:1.0AMP
Contact Resistance:10mΩ Max
Dielectric Strength:Min 1000V RMS
Operation Temperature:-40°c to +105°c

Contact Material:Brass
Contact Plating:Au Over Ni
Insulator Material:Polyester(UL94V-0)
Standard: PPS
Soldering Temperature: 260°C±5° 5S

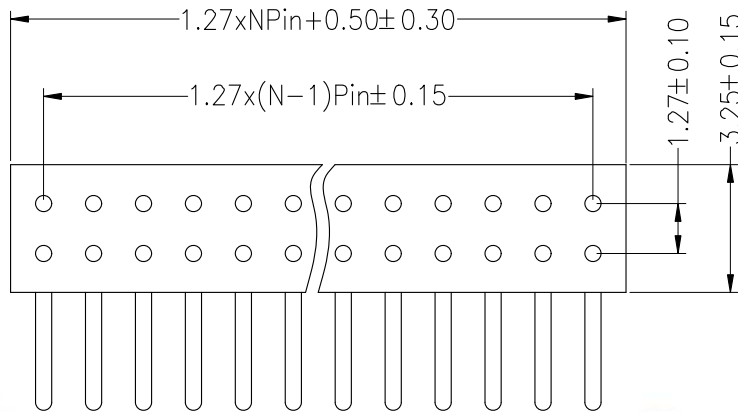

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

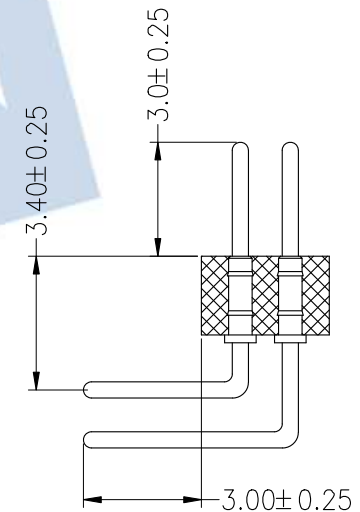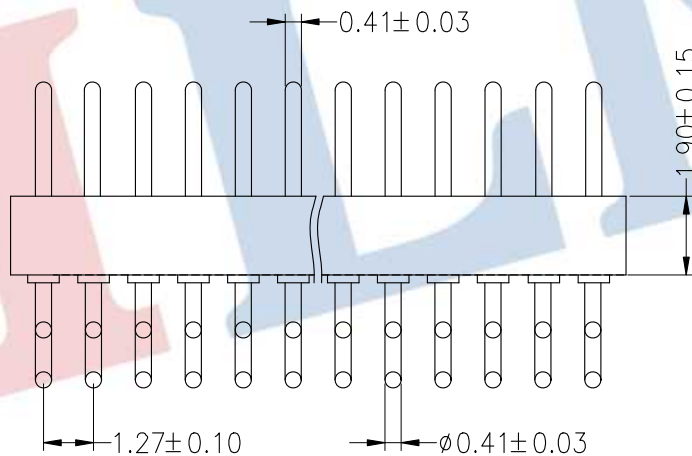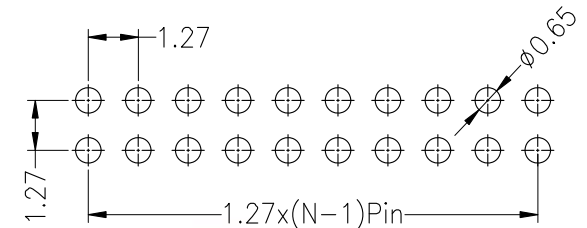

Ordering Information

3614 19 2 XX R XX 101 0X

No.of
Pins
Per Row
2-50

Contact
G0:Gold
Plating
Flash

Pin Length
101=10.1mm

				OPERATION		DRAW	JinChengXin	18.05.26	SCALE	FIT	JILN® 深圳市锦凌电子有限公司 SHENZHEN JINLING ELECTRONICS CO.,LTD Tel: 86-755-27483253 Fax: 86-755-2997-5588	
				X.X	±0.30				UNIT	mm		
				X.XX	±0.20	CHECK			SIZE	A4		
				X.XXX	±0.10				SHEET	1/1		
REV	DATE	MODIFICATION DESCRIPTION		CHANGE	Angle DIM	±3° TOL	APPROVE		PROJ.	TITLE:	PART NO.	
1	2			3	4	5					3614192XXRXX1010X	
1	2			3	4	5	6	7	8	9	1.27x1.9 Machine Pin Header 90°	