



### SPECIFICATIONS

Current Rating:3.0AMP

Contact Resistance:10mΩ Max

Dielectric Strength:Min 1000V RMS

Operation Temperature:-40℃ to +105℃



Contact Material:Brass

Contact Plating:Au Over Ni



Insulator Material:Polyester(UL94V-0)

Standard: PPS

Soldering Temperature: 260℃±5° 5S

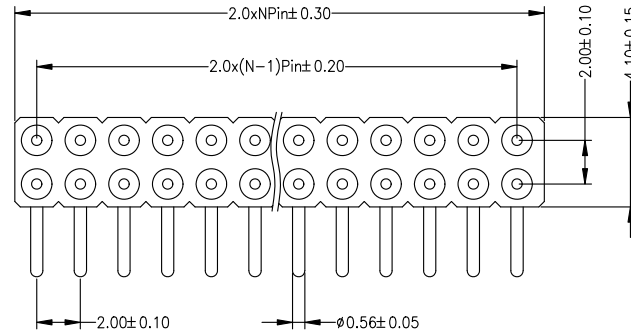

注: 整条总长+0.5

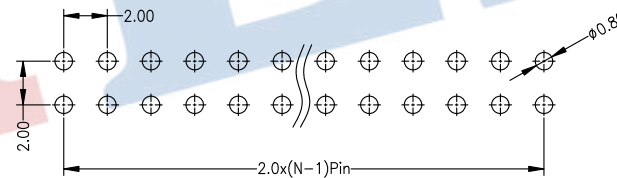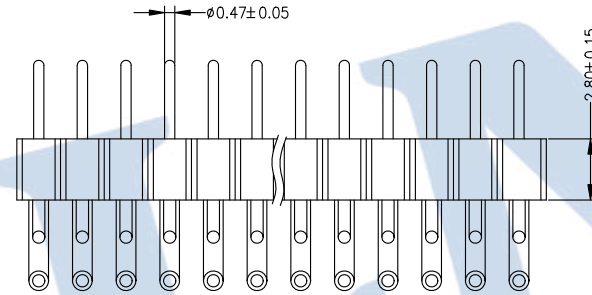

Recommended P.C.B Layout(Top Side)  
(PCB BOARD TOLERANCE±0.05)

### Ordering Information

3612 28 2 XX R XX 121 0X

No.of  
Pins  
Per Row  
2-40

Contact Plating  
G1:Gold Flash  
G3:2U" Gold  
G4:3U" Gold  
G5:5U" Gold  
G6:10U" Gold  
G7:15U" Gold

Length  
121=12.1mm

**JILN**® 深圳市锦凌电子有限公司  
SHENZHEN JINLING ELECTRONICS CO.,LTD

Tel: 86-755-274832253 Fax: 86-755-2997-5588

PART NO. 3612282XXRXX1210X

TITLE: 2.0x2.8 双头针 90° Dual Row

OPERATION

X.X ±0.30

X.XX ±0.20

X.XXX ±0.10

Angle ±3°

DIM TOL

DRAW

yiyusheng

18.12.13

SCALE

FIT

UNIT

mm

SIZE

A4

SHEET

1/1

PROJ.

PROJ.

A0

2018.12.13

NEW DRAWING

REV

DATE

MODIFICATION DESCRIPTION

CHANGE

APPROVE