
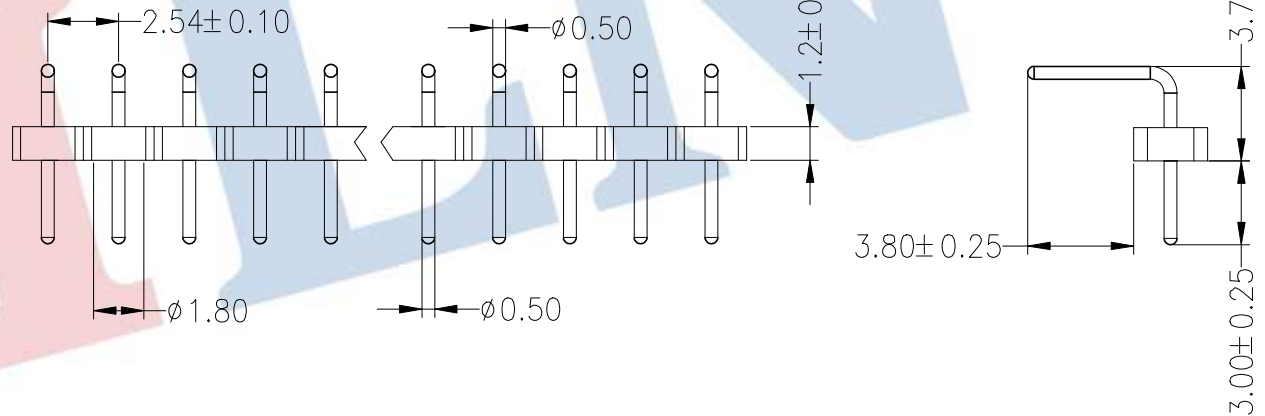
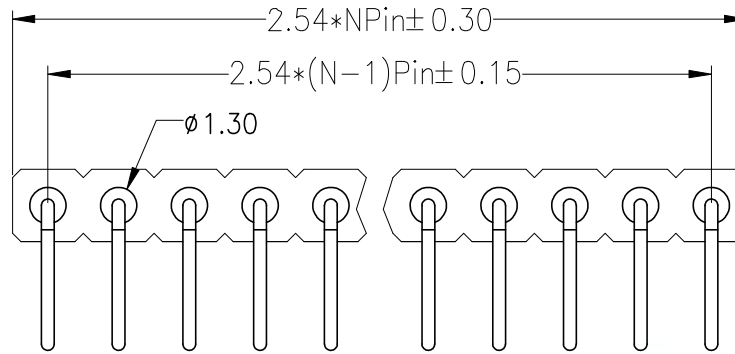


**HSF RoHS**

**SPECIFICATIONS**

Current Rating:3.0AMP  
 Contact Resistance:20mΩ Max  
 Dielectric Strength:Min 1000V AC RMS  
 Operation Temperature:-40°C to +105°C

Contact Material:Copper Alloy  
 Contact Plating:Au Over Ni  
 Insulator Material:Polyester(UL94V-0)  
 Standard: PPS  
 Soldering Temperature:  
 260°C±5°C For 5~10 Second

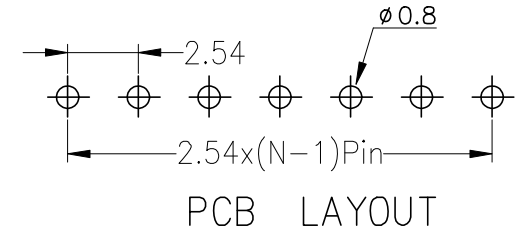

**Ordering Information**

**3610 12 1 XX R XX 114 XX**

No. of Pins  
 NPin  
 N=02~40

Contact Plating  
 G1:1U" Gold  
 G2:1.5U" Gold  
 G3:2U" Gold  
 G4:3U" Gold  
 G5:5U" Gold  
 S0:Gold Flash/Tin  
 SN:Tin

Length  
 114=11.4mm

Code Stream

				OPERATION		DRAW	Jelly Feng	2023.07.11	SCALE	FIT	<b>JILN</b> ® 深圳市锦凌电子有限公司 SHENZHEN JINLING ELECTRONICS CO.,LTD Tel: 86-755-27483253 Fax: 86-755-2997-5588	
				X.X	±0.30				UNIT	mm		
				X.XX	±0.20	CHECK	SIZE	A4				
				X.XXX	±0.10	APPROVE	SHEET	1/1				
A0	2023.07.11	NEW DRAWING		Angle	±3°			PROJ.	☉	PART NO.	3610121XXRXX114XX	
REV	DATE	MODIFICATION DESCRIPTION		CHANGE	DIM	TOL			TITLE:	2.54X1.2单排双头针90° L11.4		