

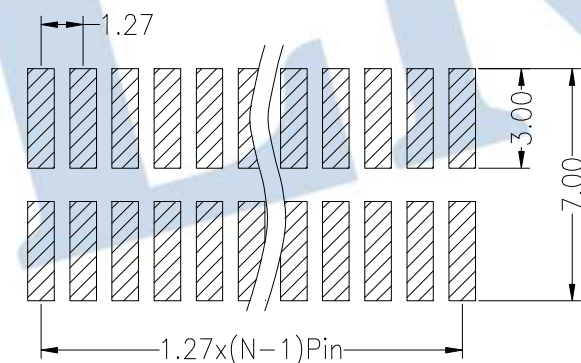
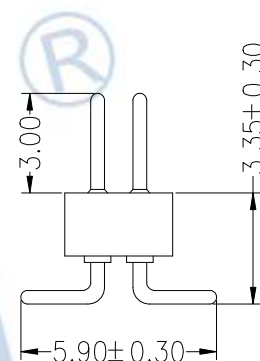


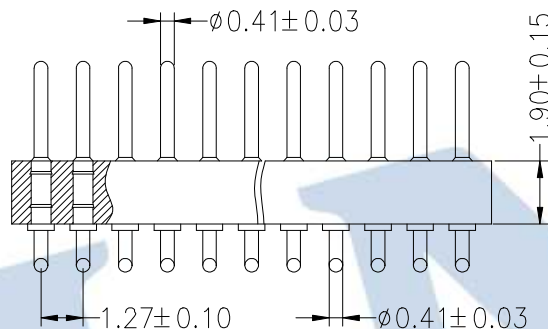

SPECIFICATIONS

Current Rating:1.0AMP
Contact Resistance:10mΩ Max
Dielectric Strength:Min 1000V RMS
Operation Temperature:-40℃ to +105℃

Contact Material:Brass
Contact Plating:Au Over Ni
Insulator Material:Polyester(UL94V-0)
Resistance To Soldering Heat:
260° C±5° C, 10s(PPS insulator)

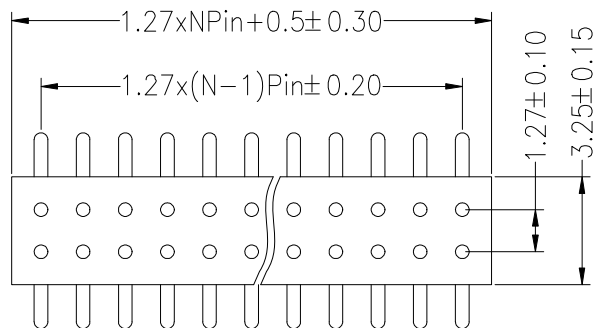

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

Ordering Information

3614 19 2 XX M XX 081 0X

No.of
Pins
Per Row
2-50Pin

Contact Plating
G1:Gold Flash
G2:2U" Gold
G3:3U" Gold
G4:5U" Gold
G5:10U" Gold

Length
081=8.1mm

				OPERATION		DRAW	yiyusheng	20.04.01	SCALE	FIT	JILN ® 深圳市锦凌电子有限公司 SHENZHEN JINLING ELECTRONICS CO.,LTD Tel: 86-755-27483253 Fax: 86-755-2997-5588	
				X.X	±0.30				UNIT	mm		
				X.XX	±0.20	CHECK			SIZE	A4	PART NO.	3614192XXMXX0810X
				X.XXX	±0.10				SHEET	1/1		
REV	DATE	MODIFICATION DESCRIPTION		CHANGE	DIM	TOL	APPROVE		PROJ.	Φ	TITLE:	1.27x1.9 双头针 2xNPin SMT