



SPECIFICATIONS




Current Rating:1.0AMP
 Contact Resistance:10mΩ Max
 Dielectric Strength:Min 1000V RMS
 Operation Temperature:-40°c to +105°c

Contact Material:Brass
 Contact Plating:Au Over Ni
 Insulator Material:Polyester(UL94V-0)
 Resistance To Soldering Heat:
 260° C±5° C, 10s(PPS insulator)




Ordering Information

3614 22 1 XX XX M 081 0X

No.of Pins 2-50
 Contact Plating
 G1:Gold Flash
 G2:2U" Gold
 G3:3U" Gold
 G4:5U" Gold
 G5:10U" Gold
 Pin Length 081=8.1mm
 Serial code

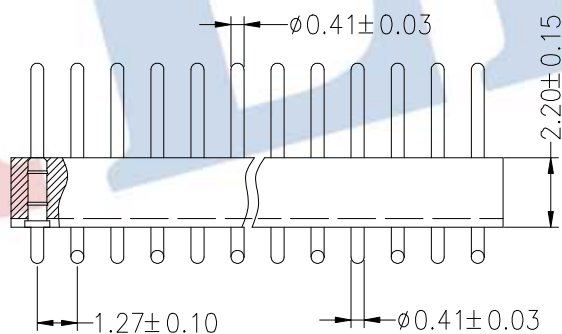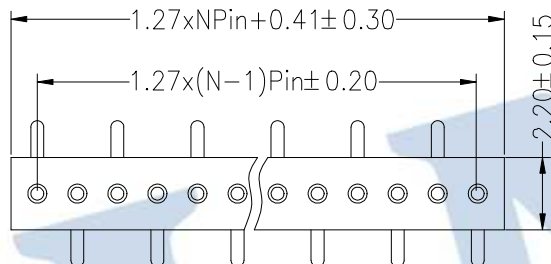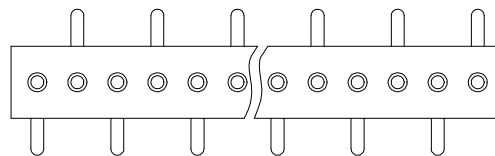

Recommended P.C.B Layout(Top Side)
 (PCB BOARD TOLERANCE±0.05)

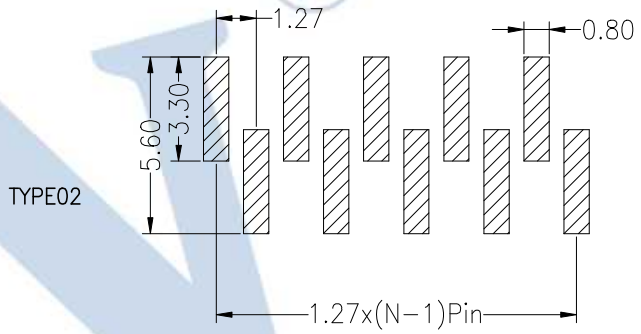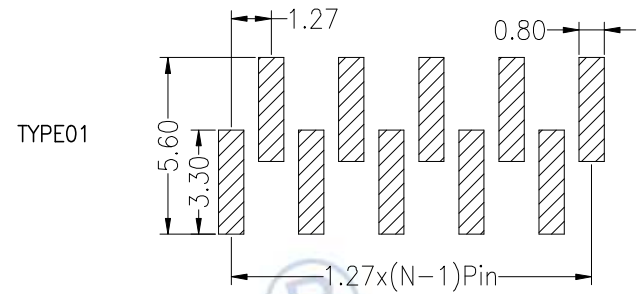

				OPERATION		DRAW	YiYuSheng	12.07.23	SCALE	FIT	JILN ® 深圳市锦凌电子有限公司 SHENZHEN JINLING ELECTRONICS CO.,LTD Tel: 86-755-27483253 Fax: 86-755-2997-5588		
				X.X	±0.30				UNIT	mm			
				X.XX	±0.20	CHECK	SIZE	A4	PART NO.	3614221XXXXM0810X			
				X.XXX	±0.10	APPROVE	SHEET	1/1	TITLE:	1.27mm 1xNPin SMT L=8.10			
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	DIM	TOL			PROJ.					