







SPECIFICATIONS

Rated Current:3.0AMP
 Contact Resistance:20mΩ Max
 Withstand Voltage:1000V AC/DC
 Insulation Resistance:1000MΩ Min
 Operation Temperature:-40°c to +105°c

Contact Material:Brass
 Contact Plating:Au Over Ni
 Insulator Material:Polyester(UL94V-0)
 Resistance To Soldering Heat:
 245° C±5° C, 10s(PBT insulator)
 260° C±5° C, 10s(PA6T&PA9T&LCP insulator)

Recommended P.C.B Layout(Top Side)
 (PCB BOARD TOLERANCE± 0.05)

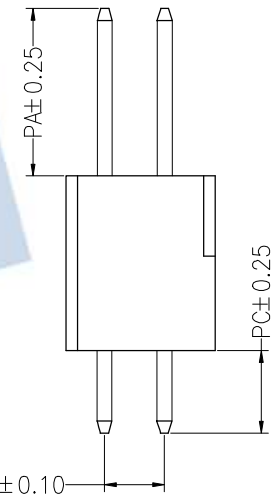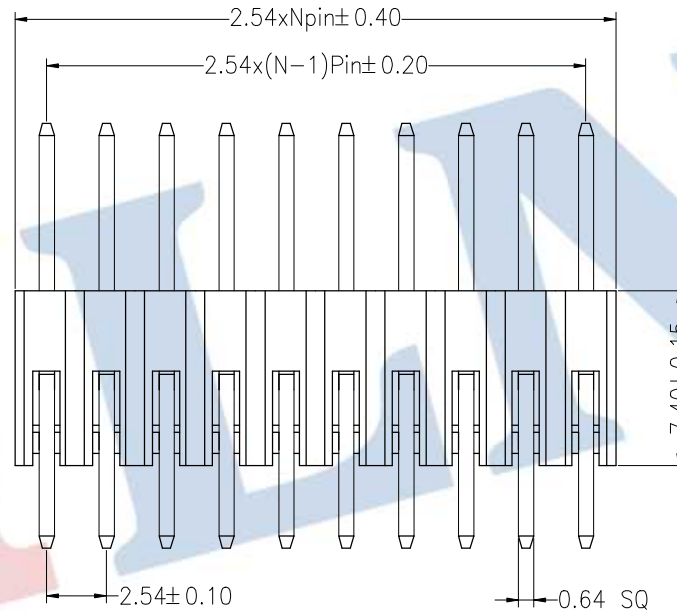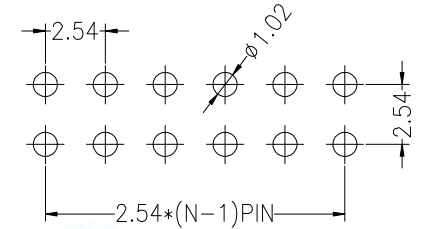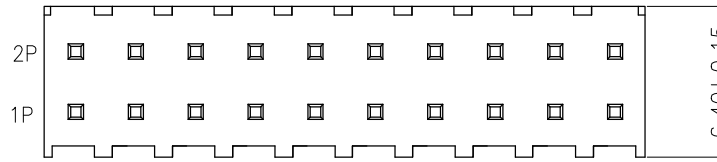

Ordering Information

1274 12 XX X N XX S XXX X 0X

- High.of Plastic 74=H7.4mm
- No.of Pins Per Row 02~40P
- Insulator Material Option A=BK-PBT C=BK-PA6T E=BK-PA9T F=BK-LCP
- Contact Plating Option G0:Gold Flash G1:1u" Gold G2:1.5u" Gold G3:2u" Gold G4:3u" Gold G5:5u" Gold G6:10u" Gold G7:15u" Gold G8:30u" Gold S0:Gold Flash/Tin SN:Tin
- Pin Length
- Packing 0=PE Bag A=Tray T=Tube P=Tube+Cap R=Reel+Cap M=Reel+Mylar

| Dimension antitheses list | | |
|---------------------------|-----|-----|
| ITEM | PA | PC |
| Alternate | XXX | XXX |

| | | | | | | | | | | | | | |
|-----|------------|--------------------------|--|-----------|-------|---------|----------|----------|-------|-------------------------------|---|--|-------------------------------|
| | | | | OPERATION | | DRAW | RICH LIN | 23.06.10 | SCALE | FIT | JILN ® 深圳市锦凌电子有限公司 SHENZHEN JINLING ELECTRONICS CO.,LTD Tel: 86-755-27483253 Fax: 86-755-2997-5992 | | |
| | | | | X.X | ±0.30 | | | | UNIT | mm | | | |
| | | | | X.XX | ±0.20 | CHECK | | SIZE | A4 | PART NO. 127412XXXXNXXSXXXX0X | | | |
| A0 | 2023.06.10 | NEW DRAWING | | X.XXX | ±0.10 | APPROVE | | SHEET | 1/1 | | | | TITLE: 2.54mm Pin Header 180° |
| REV | DATE | MODIFICATION DESCRIPTION | | CHANGE | | | | PROJ. | ⌀ | | | | |