



SPECIFICATIONS

Rated Current:3.0AMP

Contact Resistance:20mΩ Max

Withstand Voltage:1000V AC/DC

Insulation Resistance:1000MΩ Min

Operation Temperature:-40°C to +105°C

Contact Material:Brass



Contact Plating:Au Over Ni

Insulator Material:Polyester(UL94V-0)

Resistance To Soldering Heat:



260°C±5°C, 10s(PA6T&PA9T&LCP insulator)

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

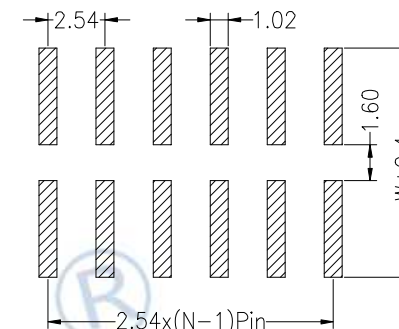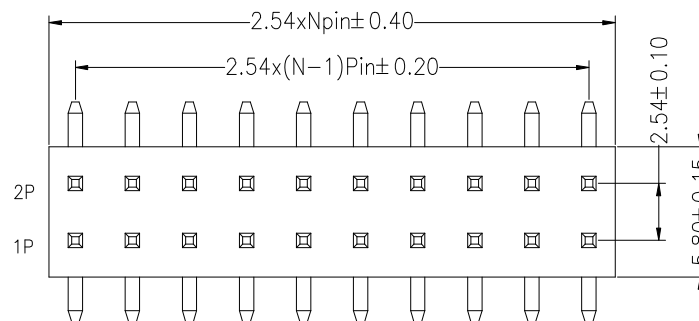

Ordering Information

1243	1 2	XX	X	N	XX	M	XXX	X	0X
High.of Plastic 43=H4.3mm	No.of Pins Per Row 02~40P	Insulator Material Option C=BK-PA6T E=BK-PA9T F=BK-LCP	Contact Plating G0:Gold Flash G1:1u" Gold G2:1.5u" Gold G3:2u" Gold G4:3u" Gold G5:5u" Gold G6:10u" Gold G7:15u" Gold G8:30u" Gold S0:Gold Flash/Tin SN:Tin	Pin Length	Packing 0=PE Bag A=Tray T=Tube P=Tube+Cap R=Reel+Cap M=Reel+Mylar				

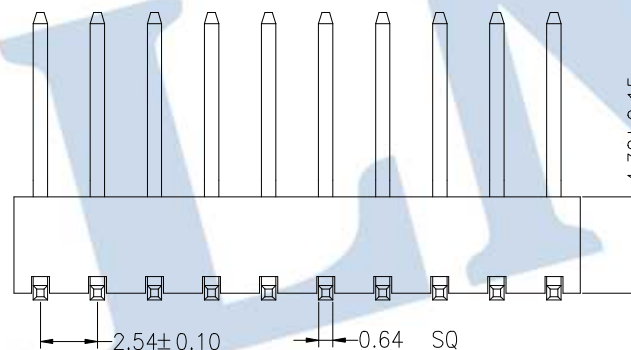

Dimension antitheses list			
ITEM	PA	PB	W
Alternate	XXX	XXX	XXX

JILN® 深圳市锦凌电子有限公司
SHENZHEN JINLING ELECTRONICS CO.,LTD
Tel: 86-755-27483253 Fax: 86-755-2997-5992

				OPERATION		DRAW	RICH LIN	23.06.10	SCALE	FIT
				X.X	±0.30				CHECK	
				X.XX	±0.20					
A0	2023.06.10	NEW DRAWING		X.XXX	±0.10					
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	Angle	± 3°	APPROVE				
				DIM	TOL					

PART NO.		124312XXXXXXMXXXX0X
TITLE:		2.54mm Pin Header SMT