



SPECIFICATIONS

Rated Current:2.0AMP

Contact Resistance:20mΩ Max

Withstand Voltage:500V AC/DC

Insulation Resistance:1000MΩ Min

Operation Temperature:-40°c to +105°c

Contact Material:Brass



Contact Plating:Au Over Ni

Insulator Material:Polyester(UL94V-0)

Resistance To Soldering Heat:

260° C±5° C, 10s(PA6T&PA9T&LCP insulator)

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE± 0.05)

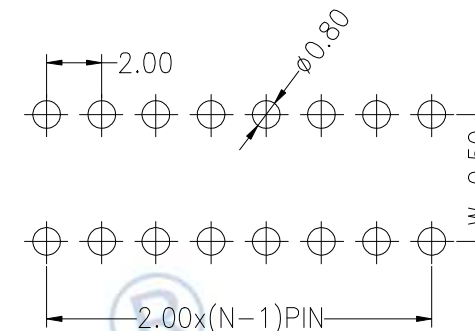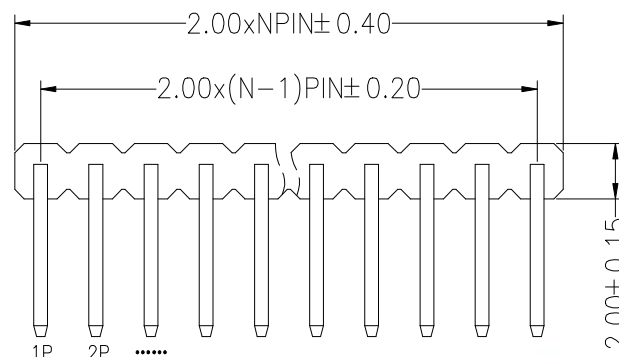

Ordering Information

13XX 2 1 XX X N XX U XXX X 0X

High.of
Plastic
10=H1.0mm
15=H1.5mm
20=H2.0mm
25=H2.5mm
30=H3.0mm
40=H4.0mm



No.of
Pins
Per Row
02~40P

Insulator Material
Option
C=BK-PA6T
E=BK-PA9T
F=BK-LCP

Contact Plating
G0:Gold Flash
G1:1u" Gold
G2:1.5u" Gold
G3:2u" Gold
G4:3u" Gold
G5:5u" Gold
G6:10u" Gold
G7:15u" Gold
G8:30u" Gold
S0:Gold Flash/Tin
SN:Tin

Pin Length

Packing
O=PE Bag
A=Tray
T=Tube
P=Tube+Cap
R=Reel+Cap
M=Reel+Mylar

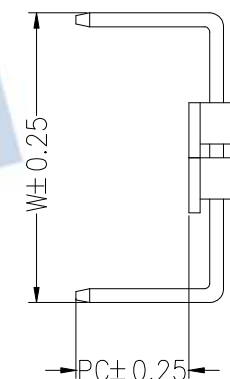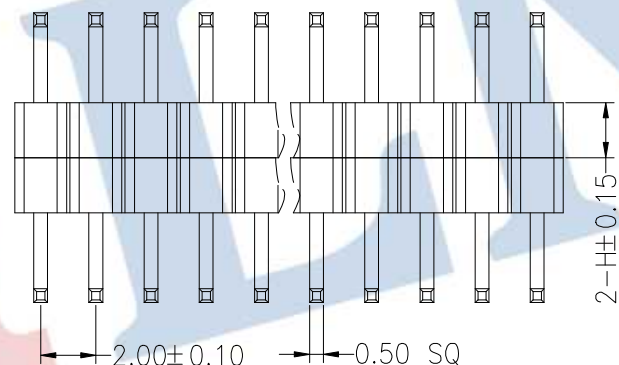

胶芯居中

Dimension antitheses list		
ITEM	PC	W
Alternate	XXX	XXX

OPERATION

DRAW

RICH LIN

23.06.10

SCALE

FIT

X.X

±0.30

X.XX

±0.20

X.XXX

±0.10

Angle

± 3°

DIM

TOL

APPROVE

UNIT

mm

SIZE

A4

SHEET

1/1

PROJ.

◆

JILN® 深圳市锦凌电子有限公司
SHENZHEN JINLING ELECTRONICS CO.,LTD

Tel: 86-755-27483253 Fax: 86-755-2997-5992

PART NO.

13XX21XXXNXXUXXXX0X

TITLE:

2.0mm Pin Header 两边弯

1

2

3

4

5

6

7

8

9